

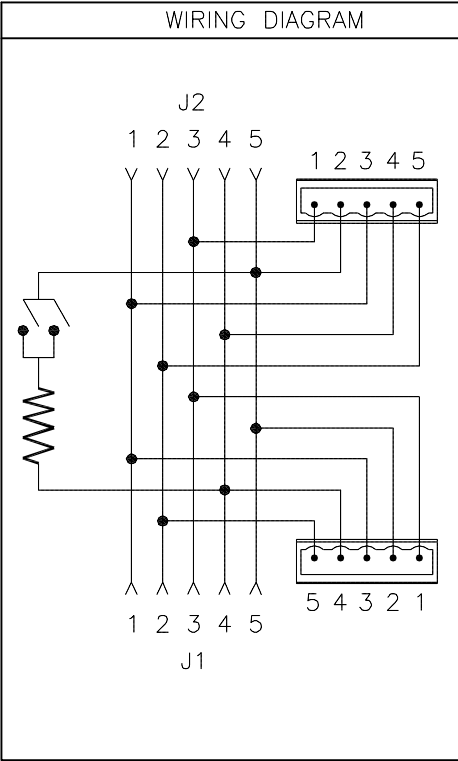



J1 & J2 CONNECTORS		TERMINAL BLOCK PLUGS		SPECIFICATIONS																			
 1 = DRAIN 2 = + VOLTAGE 3 = - VOLTAGE 4 = CAN_H 5 = CAN_L		 1 = - VOLTAGE 2 = CAN_L 3 = DRAIN 4 = CAN_H 5 = + VOLTAGE																					
 DeviceNet™		 DeviceNet™		<table><tr><td>HOUSING MATERIAL/COLOR</td><td>NYLON 66 - 33% GLASS FILLED/BLACK</td></tr><tr><td>RECEPTACLE HOUSING MATERIAL/PLATING</td><td>NICKEL-PLATED BRASS</td></tr><tr><td>CONTACT CARRIERS/COLOR</td><td>TPU/BLUE</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>OPERATING VOLTAGE</td><td>40 V</td></tr><tr><td>OPERATING CURRENT</td><td>8 A</td></tr><tr><td>OPTIONAL TERMINATOR RESISTOR</td><td>1 OF 2 SWITCHES IN "ON" POSITION</td></tr><tr><td>PROTECTION CLASS to DIN 40050</td><td>IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED</td></tr><tr><td>OPERATING TEMPERATURE</td><td>-40°C to +70°C (-40°F to +158°F)</td></tr></table>		HOUSING MATERIAL/COLOR	NYLON 66 - 33% GLASS FILLED/BLACK	RECEPTACLE HOUSING MATERIAL/PLATING	NICKEL-PLATED BRASS	CONTACT CARRIERS/COLOR	TPU/BLUE	CONTACT MATERIAL/PLATING	BRASS/GOLD	OPERATING VOLTAGE	40 V	OPERATING CURRENT	8 A	OPTIONAL TERMINATOR RESISTOR	1 OF 2 SWITCHES IN "ON" POSITION	PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED	OPERATING TEMPERATURE	-40°C to +70°C (-40°F to +158°F)
HOUSING MATERIAL/COLOR	NYLON 66 - 33% GLASS FILLED/BLACK																						
RECEPTACLE HOUSING MATERIAL/PLATING	NICKEL-PLATED BRASS																						
CONTACT CARRIERS/COLOR	TPU/BLUE																						
CONTACT MATERIAL/PLATING	BRASS/GOLD																						
OPERATING VOLTAGE	40 V																						
OPERATING CURRENT	8 A																						
OPTIONAL TERMINATOR RESISTOR	1 OF 2 SWITCHES IN "ON" POSITION																						
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED																						
OPERATING TEMPERATURE	-40°C to +70°C (-40°F to +158°F)																						

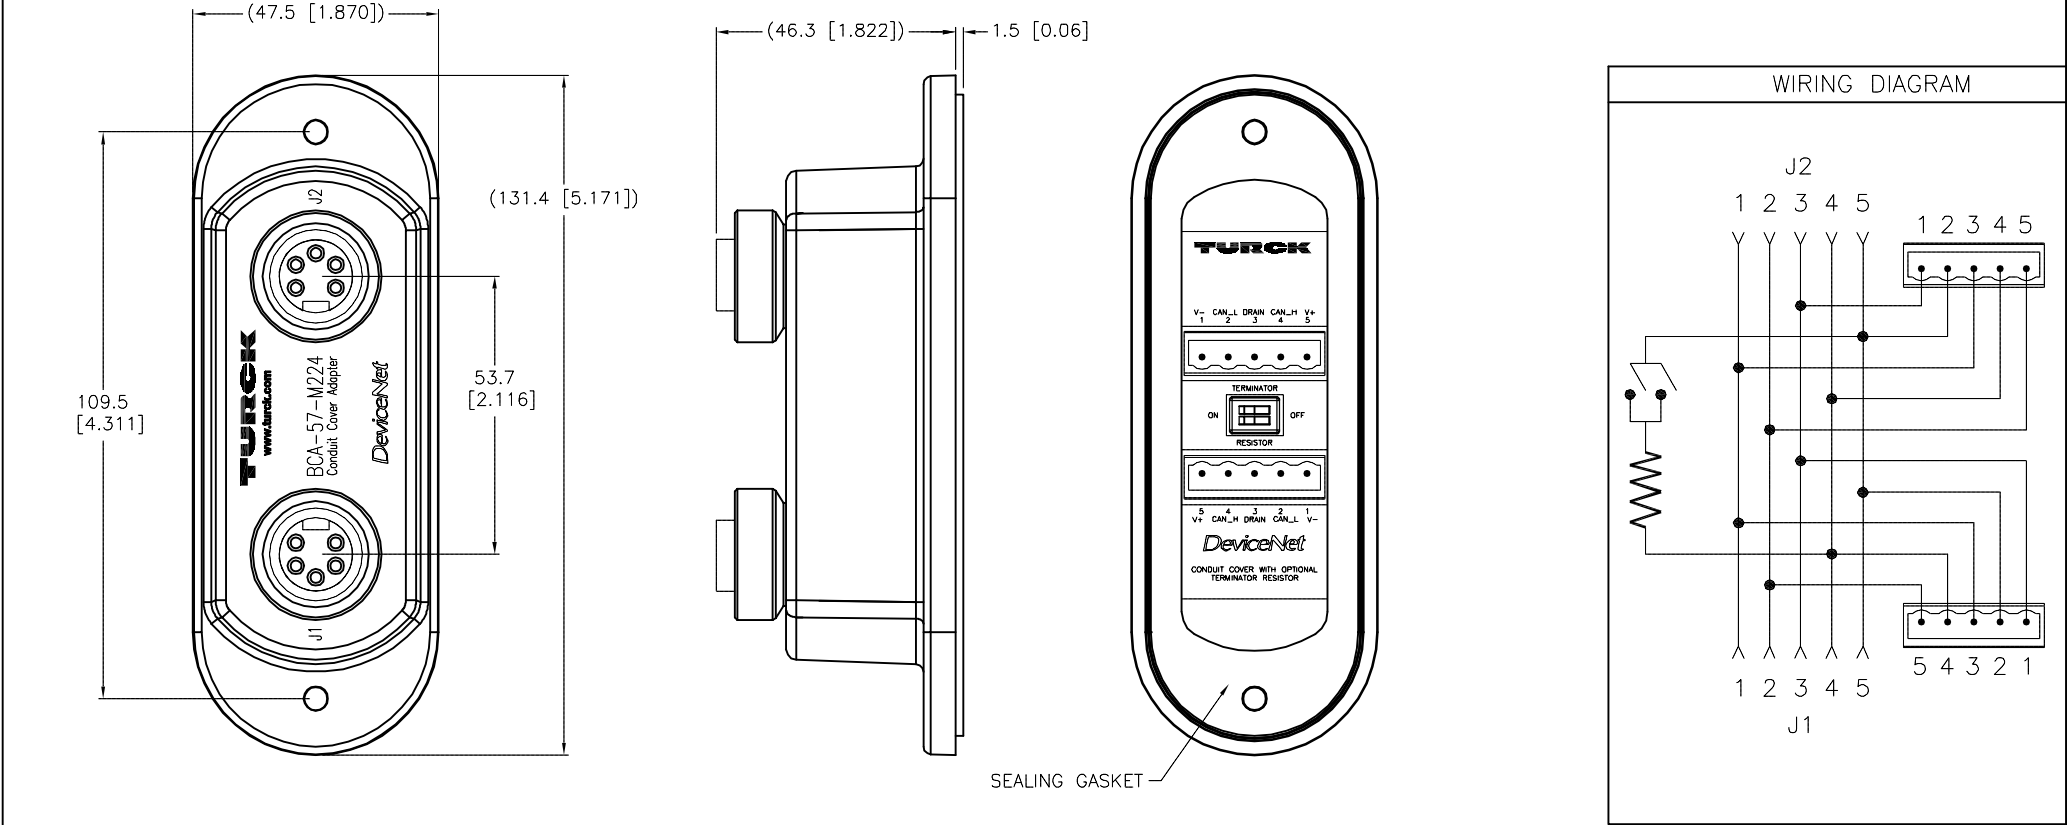

COVER SCREWS INCLUDED


FORM 8 CONDUIT BODIES:
10-24 SCREWS

MARK 9 CONDUIT BODIES:
8-32 SCREWS



D	ADD THICKER GASKET	RDS	09/12/13	42993				
REV	DESCRIPTION	BY	DATE	ECO NO.				

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.  TURCK INC High Technology Sensors and Automation Controls		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com			
1.									
2.									
3.									
4.									
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT	RDS	DATE	01/05/09	DESCRIPTION BCA-57-M224	
				APVD		SCALE	1 = 1.5		
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO. U3-10815		REV D
				DO NOT SCALE THIS DRAWING			FILE: U3-10815		SHEET 1 OF 1