




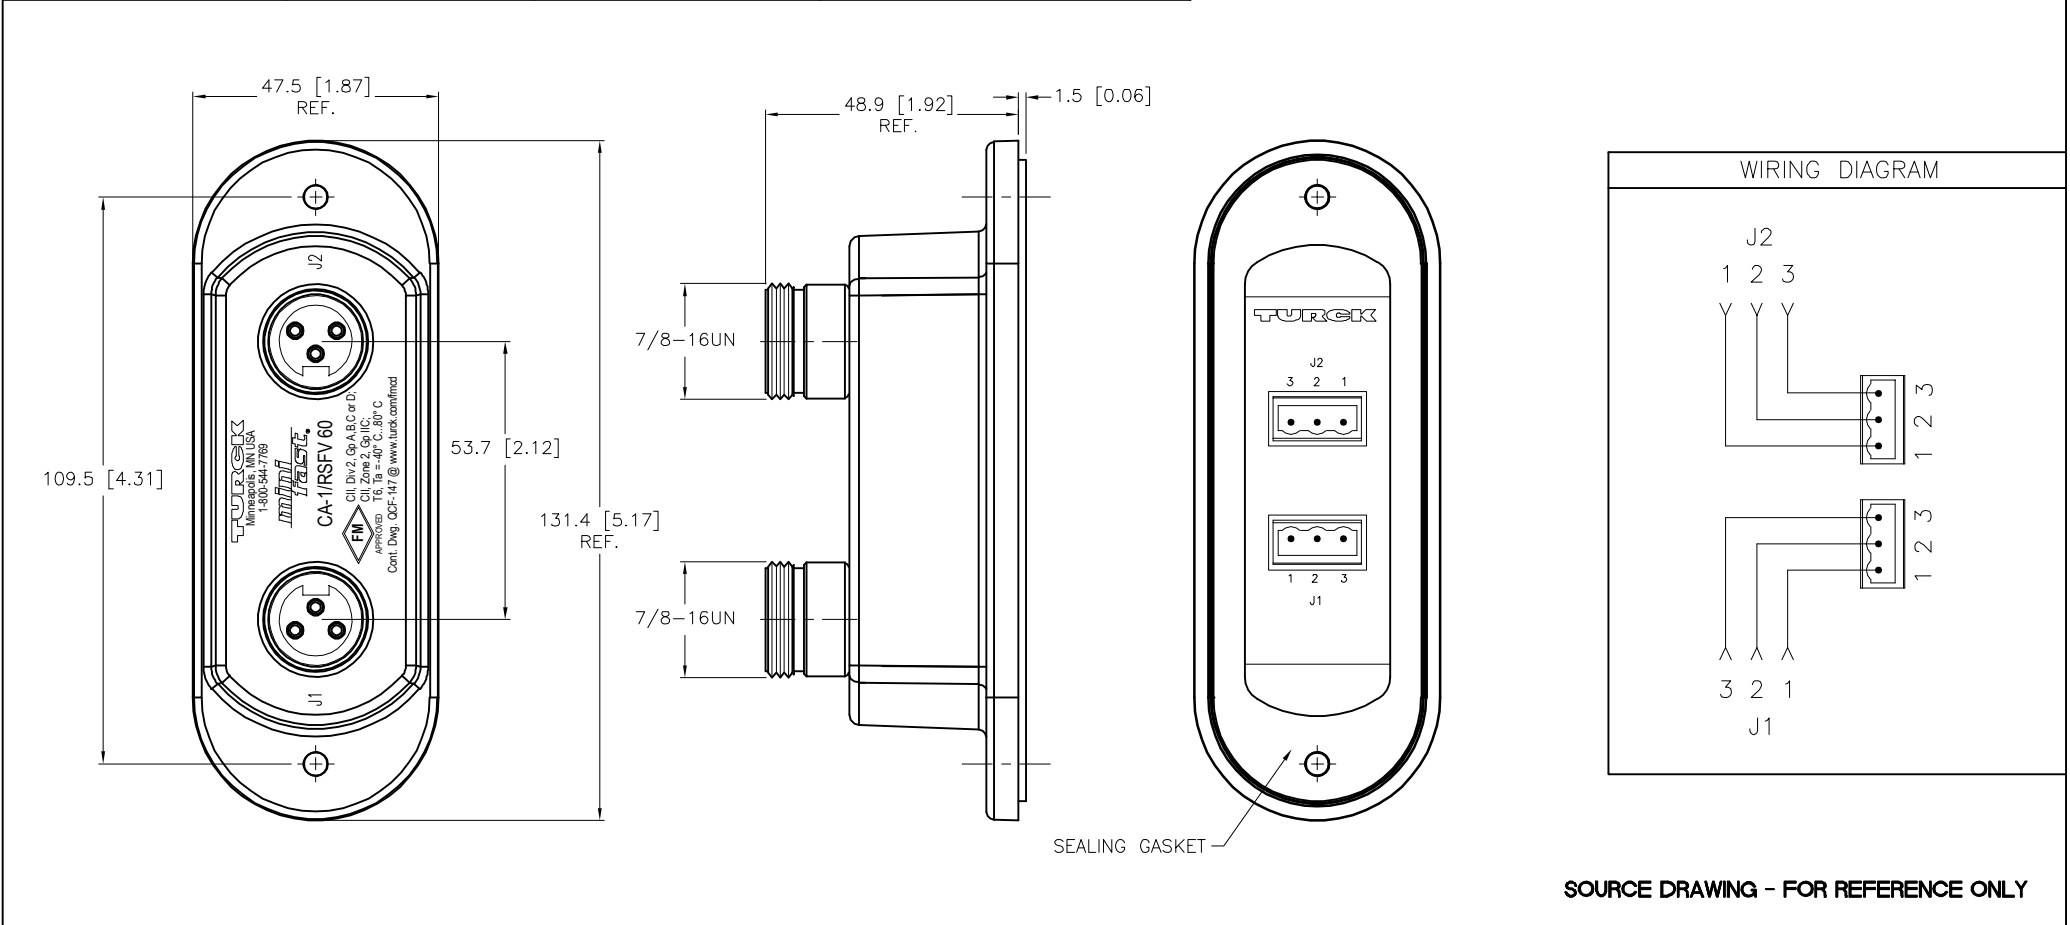


FEMALE END VIEW	TERMINAL BLOCK PLUGS	COVER SCREWS INCLUDED	TERMINAL PLUGS INCLUDED	SPECIFICATIONS	
 		 FORM 8 CONDUIT BODIES: 10-24 SCREWS MARK 9 CONDUIT BODIES: 8-32 SCREWS		HOUSING MATERIAL/COLOR	NYLON 66 - 33% GLASS FILLED/BLACK
				RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
				CONTACT CARRIERS/COLOR	TPU/BLACK
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				OPERATING VOLTAGE	250 V
				OPERATING CURRENT	9.0 A PER CONDUCTOR
				PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
				OPERATING TEMPERATURE	-40°C to +80°C (-40°F to +176°F)



SOURCE DRAWING - FOR REFERENCE ONLY

					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us					
					1.											
					2.											
					3.											
					4.											
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RWC		DATE 01/06/09		DESCRIPTION CA-2/RXFV 30			
					SEE SPECIFICATIONS				APVD DD		SCALE 1=1.5					
										FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.
					SEE SPECIFICATIONS		U3-10817		E							
E	ADDED FM APPROVAL TO CLICHE				ER	01/27/22	500000004150									
REV	DESCRIPTION				BY	DATE	ECO NO.				DO NOT SCALE THIS DRAWING		FILE: U3-10817		SHEET 1 OF 1	