






SPECIFICATIONS		
HOUSING MATERIAL/COLOR	NYLON 66 - 33% GLASS FILLED/BLACK	
RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED	
CONTACT CARRIERS/COLOR	PA 12/BLACK (BUS)	
CONTACT MATERIAL/PLATING	BRASS/GOLD	
OPERATING VOLTAGE	250 V	
OPERATING CURRENT	4.0 A (BUS)	
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE	
	COVERED WITH PLUGS OR CONNECTED	
OPERATING TEMPERATURE	-40° C to $+80^{\circ}$ C (-40° F to $+176^{\circ}$ F)	

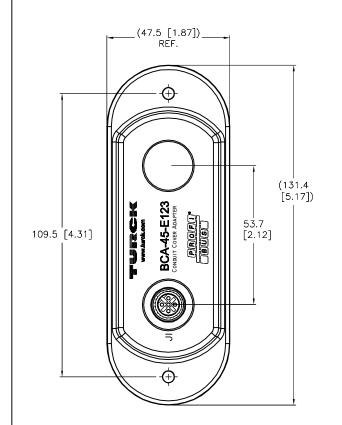

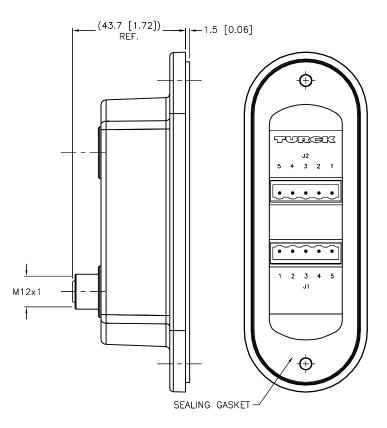

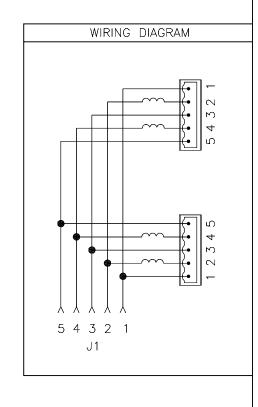





TERMINAL PLUGS INCLUDED

3. MATERIAL SEE SPECIFICATIONS FINISH 84 NO. SEE SPECIFICATIONS

2.

RELATED DOCUMENTS 3RD ANGLE THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS PROJECTION DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

APVD

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION

turck inc

MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 High Technology Sensors and Automation Controls (763) 553-0708 fax turck.com

3000 CAMPUS DRIVE

SOURCE DRAWING - FOR REFERENCE ONLY

DATE 03/23/09 RDS

BCA-45-E123

	G GZ GGNEWS			
Ε	UPDATE LOW TEMP. SPEC.	RDS	08/26/14	4698
REV	DESCRIPTION	BY	DATE	ECO NO

SCALE 1=1.5 UNIT OF MEASUREMENT IDENTIFICATION NO. REV MILLIMETER [INCH] U3-10844 FILE: U3-10844 SHEET 1 OF 1 DO NOT SCALE THIS DRAWING