


S1 CONNECTOR

1 = - VOLTAGE
2 = + VOLTAGE
3 = SHIELD
4 = GROUND



1 = - VOLTAGE
2 = + VOLTAGE
3 = SHIELD
4 = GROUND




FOUNDATION™
fieldbus

TERMINAL BLOCK PLUGS

1 = - VOLTAGE
2 = + VOLTAGE
3 = SHIELD
4 = GROUND




1 V- 2 V+ 3 SHIELD 4 GND



1 = - VOLTAGE
2 = + VOLTAGE
3 = SHIELD
4 = GROUND




SPECIFICATIONS	
HOUSING MATERIAL/COLOR	NYLON 66 - 33% GLASS FILLED/BLACK
RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
CONTACT CARRIERS/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	300 V
OPERATING CURRENT	9.0 A PER CONDUCTOR
OPTIONAL TERMINATOR RESISTOR	1 OF 2 SWITCHES IN "ON" POSITION
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to +70°C (-40°F to +158°F)

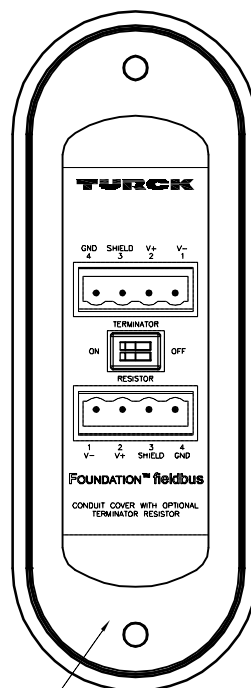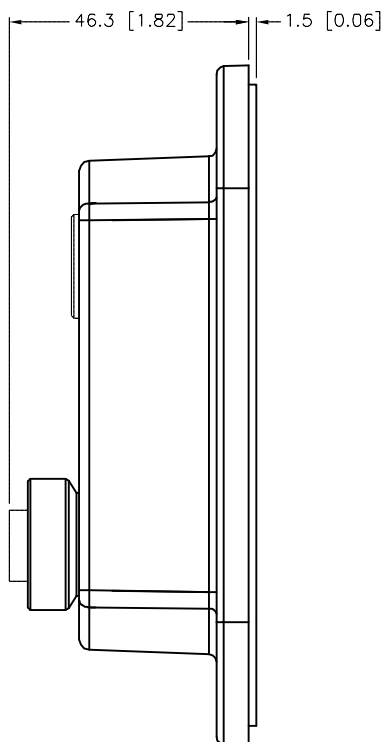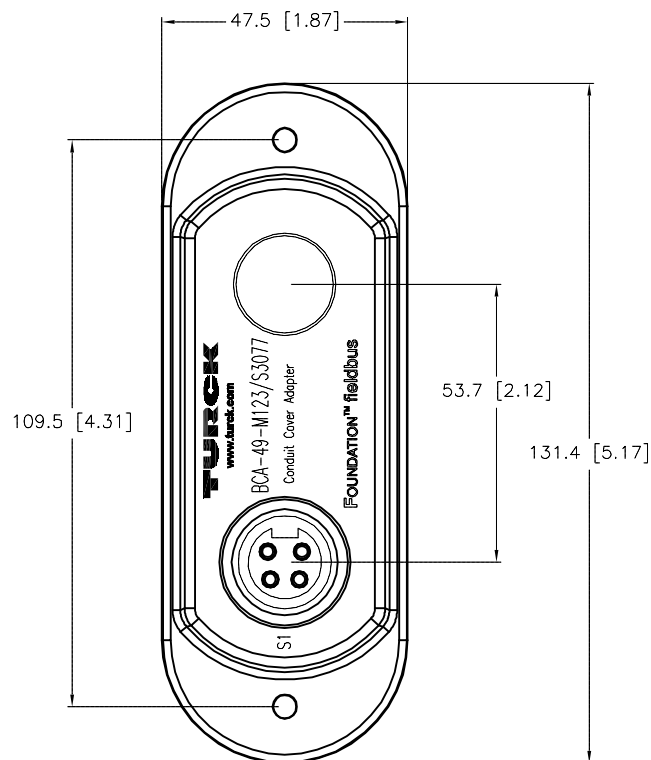


SEALING GASKET

1. "/S3077" DESIGNATES ADAPTOR PLATE FOR 3/4"
FORM 7 TYPE CONDUIT BODIES ADDED TO THE STANDARD
CONDUIT COVERS. (SEE PAGE 2)

SOURCE DRAWING - FOR REFERENCE ONLY




TERMINAL PLUGS INCLUDED



MARK 9 CONDUIT BODIES:
8-32 SCREWS

C	ADD THICKER GASKET	RDS	09/12/13	42993
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT KMY	DATE 06/27/12	DESCRIPTION BCA-49-M123/S3077		
APVD D.E.		SCALE 1=1.5				
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING		IDENTIFICATION NO. U3-10881		REV C
				FILE: U3-10881	SHEET 1 OF 2	