
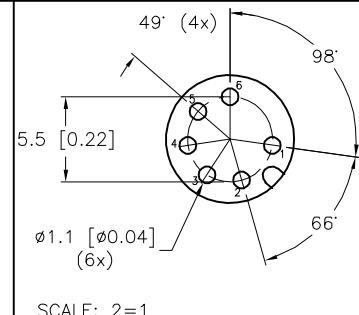
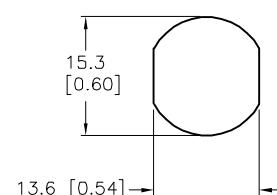


## FEMALE END VIEW



## TYPICAL PANEL CUTOUT

## TYPICAL BOARD LAYOUT

## SPECIFICATIONS

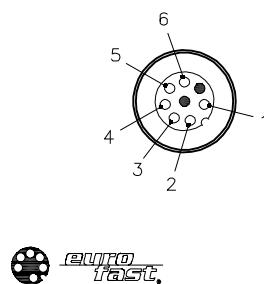

CONTACT CARRIER MATERIAL	NYLON OR TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING, LOCKNUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	1.5 A
RATED VOLTAGE [V]	60 VAC/75 VDC
NUMBER OF CONDUCTORS [AWG]	PRINTED CIRCUIT PINS
TEMPERATURE RATING	-30°C TO +80°C (-22°F TO +176°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
MAX. PANEL THICKNESS	3.0 [0.12]

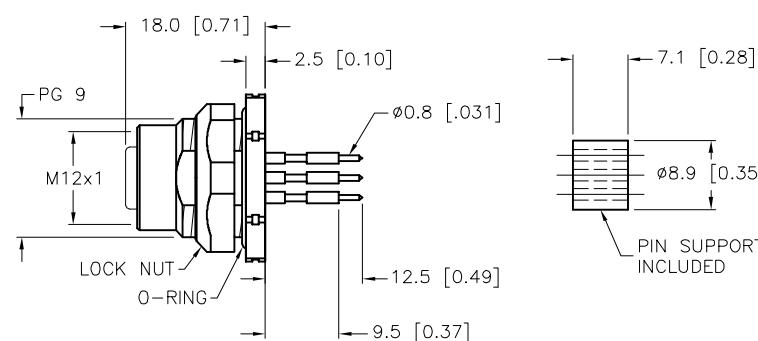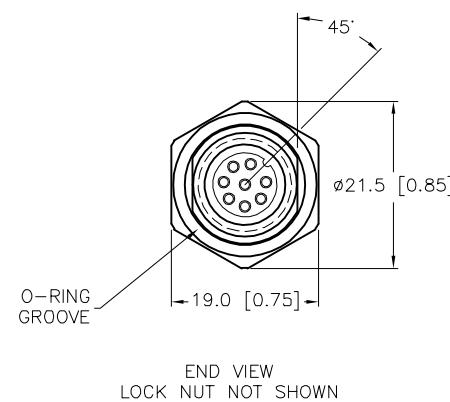

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.	2.	3.	4.			<b>TURCK</b>	
MATERIAL	SEE SPECIFICATIONS	APVD	DRFT JBJ	DATE 12/14/00	DESCRIPTION	FKFD 6	
SEE SPECIFICATIONS	FINISH	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	SCALE 1=1.0			IDENTIFICATION NO. U4501-6	
SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	MILLIMETER [ INCH ]	UNIT OF MEASUREMENT	REV G	DO NOT SCALE THIS DRAWING	FILE: U4501-6	SHEET 1 OF 1

G NOTATE THE KEYWAY IS 45° FROM THE MOUNTING FLAT RDS 04/25/22 77572

REV DESCRIPTION BY DATE ECO NO.