
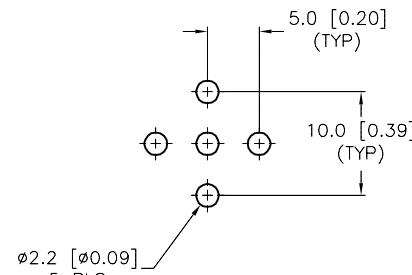


MALE END VIEW

BOARD LAYOUT 2:1







euro

fast

Profibus-DP

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON OR TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING/LOCKNUT MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	NITRILE
WASHER MATERIAL	NYLON
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	30 VAC/36 VDC
NUMBER OF CONDUCTORS [AWG]	PRINTED CIRCUIT PINS
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
MAX. PANEL THICKNESS	3.0 [0.12]

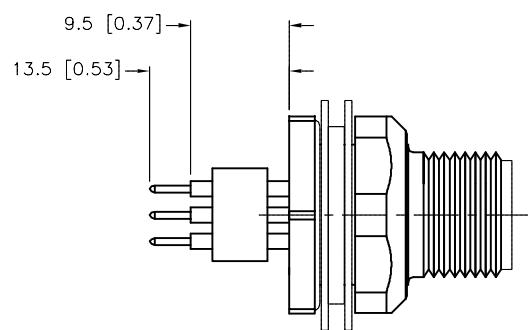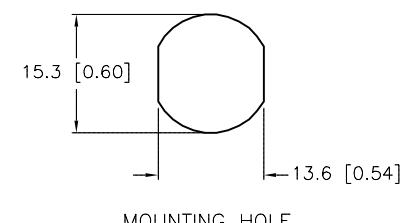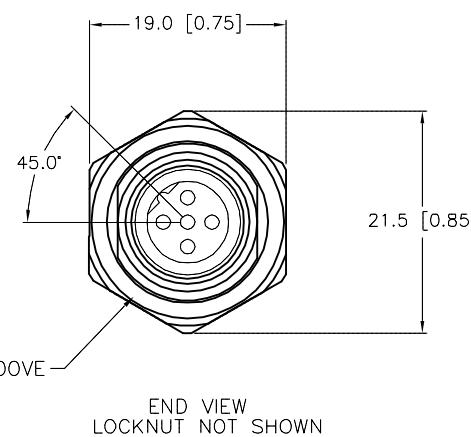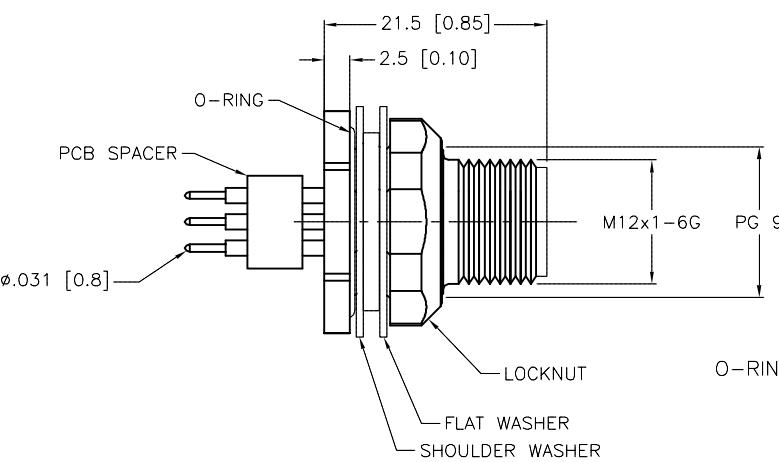


SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS

1. U9040
2. 9-RDV-130
- 3.
- 4.

3RD ANGLE PROJECTION



THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

TURCK INC
High Technology Sensors and Automation Controls

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0700 fax
turck.com

MATERIAL

SEE
SPECIFICATIONS

FINISH

ALL DIMENSIONS
DISPLAYED ON THIS
DRAWING ARE FOR
REFERENCE ONLY

CONTACT TURCK
FOR MORE
INFORMATION

DRFT

DSGN

JBJ

GC

DATE

SCALE

3/4/99

1=.8

DESCRIPTION

FSFDW 45-PCB

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

IDENTIFICATION NO.

U4504-70

REV

D

SHEET 1 OF 1

D DRAWING PROCESSED AS PART OF ECO 33971 CBM 04/07/11 33971

REV DESCRIPTION BY DATE ECO NO.