

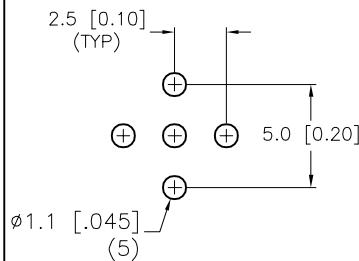


FEMALE END VIEW


BOARD LAYOUT

TYPICAL PANEL CUTOUT




SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING, LOCKNUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
NUMBER OF CONDUCTORS [AWG]	PRINTED CIRCUIT PINS
TEMPERATURE RATING	-30°C to +80°C (-22°F to +176°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
MAX. PANEL THICKNESS	3.0 [0.12]

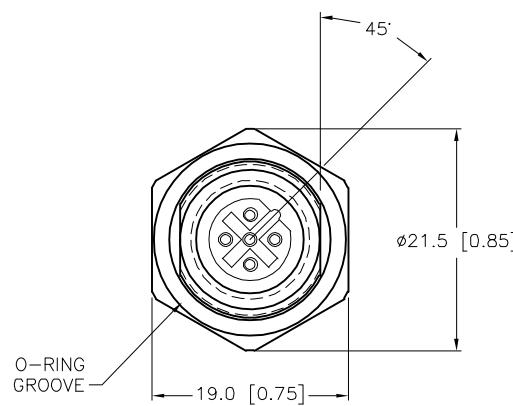

END VIEW
LOCKNUT NOT SHOWN

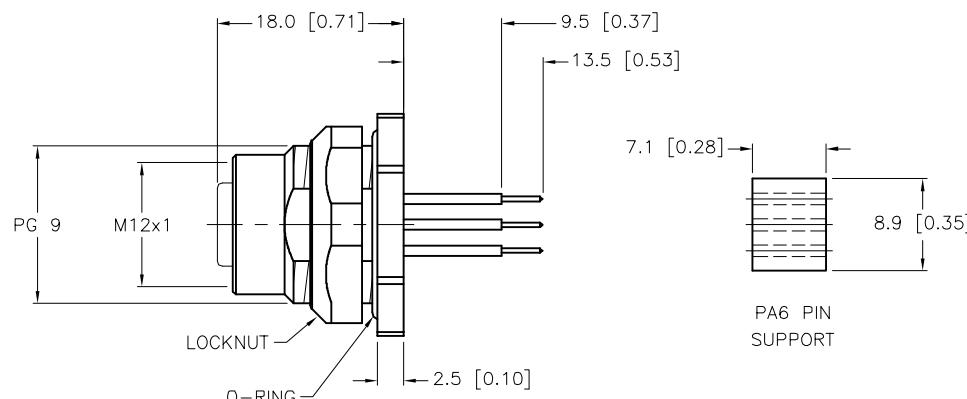

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.	2.	3.	4.			DRFT	IK
						APVD	SCALE 1=.8
SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT		DESCRIPTION	
FINISH		CONTACT TURCK FOR MORE INFORMATION		MILLIMETER [INCH]		FKFDW 4.5	
SEE SPECIFICATIONS				IDENTIFICATION NO.		U4509-3	
DO NOT SCALE THIS DRAWING		REV		D			
FILE: U4509-3		SHEET 1 OF 1					

D NOTATE THE KEYWAY IS 45° FROM THE MOUNTING FLAT RDS 04/25/22 77572

REV DESCRIPTION BY DATE ECO NO.