



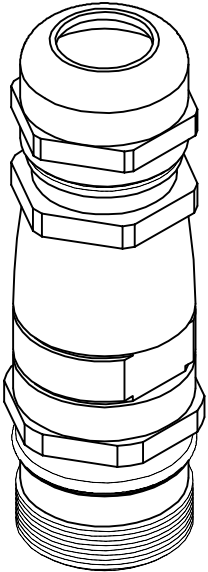

SPECIFICATIONS	
CONTACT CARRIER MATERIAL	PBT OR NYLON
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
GASKET	PERBUNAN OR FLUOR RUBBER
RATED CURRENT [A]	8.0 A
RATED VOLTAGE [V]	300 V
MAX. CONDUCTORS SIZE	12/18 AWG
TERMINATION METHOD	SOLDER
TEMPERATURE	-40°C to 125°C (-40°F to 257°F)
PROTECTION CLASS	IEC IP 65
CABLE DIAMETERS	6mm (.236") TO 12mm (.472")

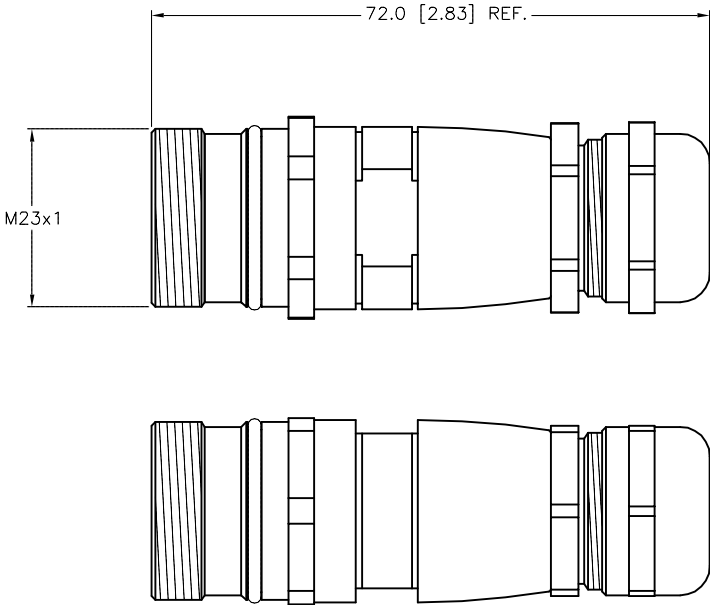

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:  
1. USE TOOL PART NUMBER "CKF-TOOL" TO AID WITH ASSEMBLY OF FIELD-WIREABLE

NOTES:  1. USE TOOL PART NUMBER "CKF-TOOL" TO AID WITH ASSEMBLY OF FIELD-WIREABLE					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us					
					1.											
					2.											
					3.											
					4.											
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT		RDS		DATE 02/06/02		DESCRIPTION  CSS 12-0			
							APVD		SCALE 1 = 1.0							
FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT  MILLIMETER [ INCH ]				IDENTIFICATION NO.  U4570				REV  C	
							DO NOT SCALE THIS DRAWING				FILE: U4570				SHEET 1 OF 1	
C	ADD NOTES				RDS	10/09/20	76214									
REV	DESCRIPTION				BY	DATE	ECO NO.									