
MALE END VIEW	BOARD LAYOUT	TYPICAL PANEL CUTOUT	SPECIFICATIONS	
4			CONTACT CARRIER MATERIAL	NYLON OR TPU
1 000 3	2.5 [0.10] (TYP) (TYP) (TYP) (TYP) (TYP) (TYP) (TYP) (TYP) (TYP)	15.3 [.602]	CONTACT MATERIAL/PLATING	BRASS/GOLD
			HOUSING, LOCKNUT MATERIAL/PLATING	BRASS/NICKEL
			O-RING MATERIAL	NITRILE
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	250 V
2			NUMBER OF CONDUCTORS [AWG]	5 PRINTED CIRCUIT PINS
			TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
'			MAX. PANEL THICKNESS	3.0 [0.12]
eviro fast,	(5x)			



## SOURCE DRAWING - FOR REFERENCE ONLY

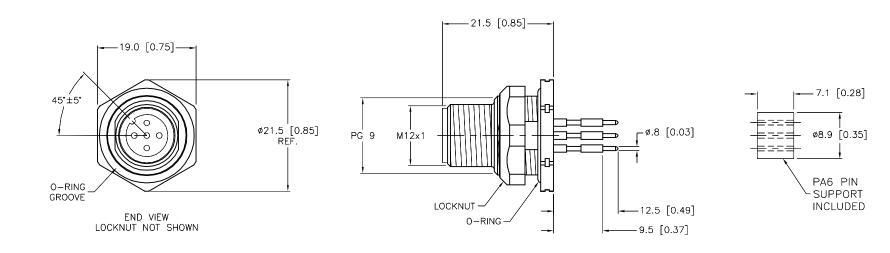