




## MALE END VIEW


## FEMALE END VIEW

## TYPICAL PANEL CUTOUT


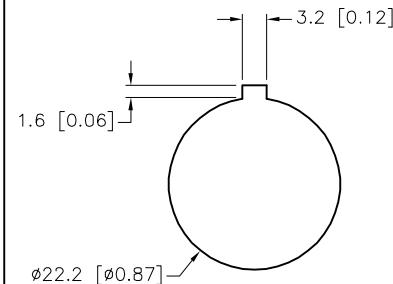



## SPECIFICATIONS

CONTACT CARRIER MATERIAL	TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	600 V
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4 AND IEC IP67
ACCOMODATES WALL THICKNESS	.040" (1.0 mm) to .875" (22.2 mm)
GASKET MATERIAL	BUNA N

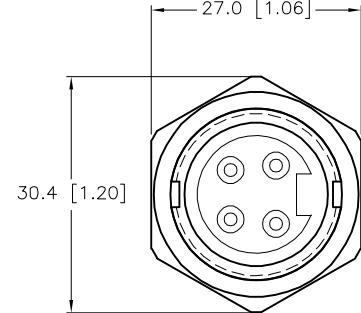

LOCKNUT AND WASHERS  
NOT SHOWN FOR  
CLARITY

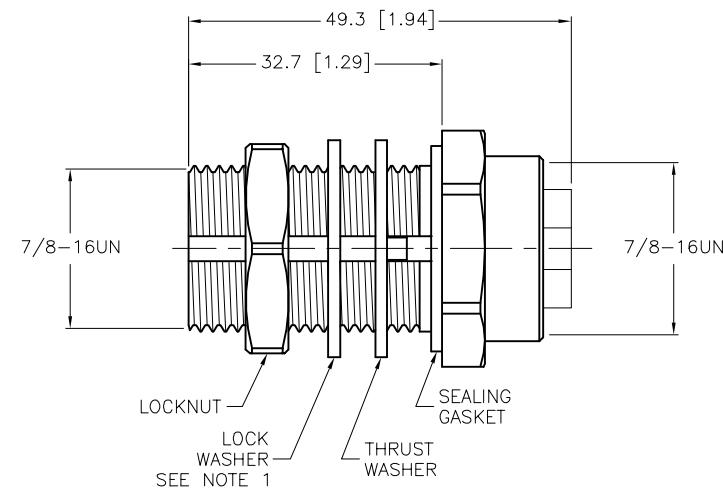

## NOTE(S):

1. LOCK WASHER TO BE INSTALLED ON THREADS AS SHOWN.

## SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us
			DRFT	RDS	
		APVD	SCALE	1=1.0	DESCRIPTION RSFV RKFV 40/22
			UNIT OF MEASUREMENT		IDENTIFICATION NO. U5219-10
			MILLIMETER [ INCH ]		REV C
			DO NOT SCALE THIS DRAWING		FILE: U5219-10
					SHEET 1 OF 1

C DRAWING PROCESSED AS PART OF ECO 38872

KMY 05/10/12 38872

REV DESCRIPTION

BY DATE ECO NO.