


FEMALE END VIEW

pico
fast.

SPECIFICATIONS	
HOUSING MATERIAL/COLOR	PBT/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	60 VAC/75 VDC
MAXIMUM WIRE SIZE	24 AWG
CABLE GRIP RANGE	3-5 mm
TEMPERATURE RATING	-40°C to +85°C (-40°F to +185°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

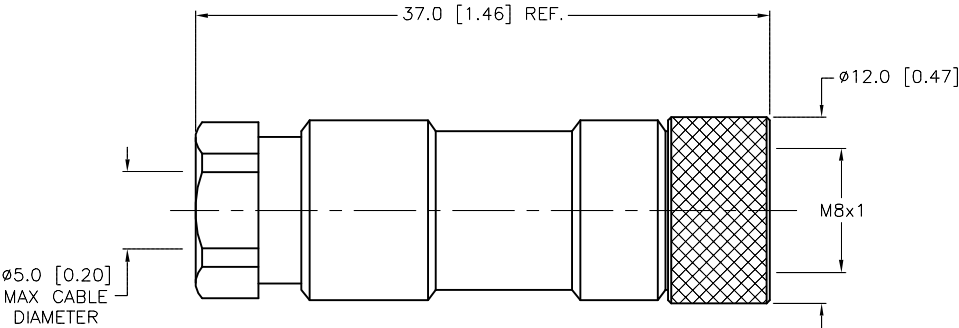

SOURCE DRAWING - FOR REFERENCE ONLY

<div>RELATED DOCUMENTS</div> <div>1. 2. 3. 4.</div>					<div>3RD ANGLE PROJECTION</div> <div></div>		<div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div>		<div><div>TURCK</div><div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div></div>			
											DATE 04/26/99	
					MATERIAL		DRFT CBM				DESCRIPTION	
					SEE SPECIFICATIONS		APVD				SCALE 1=.5	
FINISH					UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV			
SEE SPECIFICATIONS					CONTACT TURCK FOR MORE INFORMATION		MILLIMETER [INCH]		U6500		C	
DO NOT SCALE THIS DRAWING					FILE: U6500		SHEET 1 OF 1					

C	UPDATE COUPLING NUT	RDS	11/29/11	37335
REV	DESCRIPTION	BY	DATE	ECO NO.