



SPECIFICATIONS	
MATERIAL	
HOUSING/COLOR	NYLON/YELLOW
RECEPTACLE	NICKEL-PLATED BRASS
CONTACT CARRIERS/COLOR	NYLON OR TPU/BLACK
CONTACTS	GOLD-PLATED BRASS
SEALING RING	VITON O-RING
ELECTRICAL DATA	
OPERATING VOLTAGE	10-48 VDC
OPERATING CURRENT	4.0 AMPS PER PORT, 10 AMPS TOTAL
LED FUNCTION	for NPN SENSOR OUTPUT
MECHANICAL DATA	
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to +80°C (-25°F to +176°F)

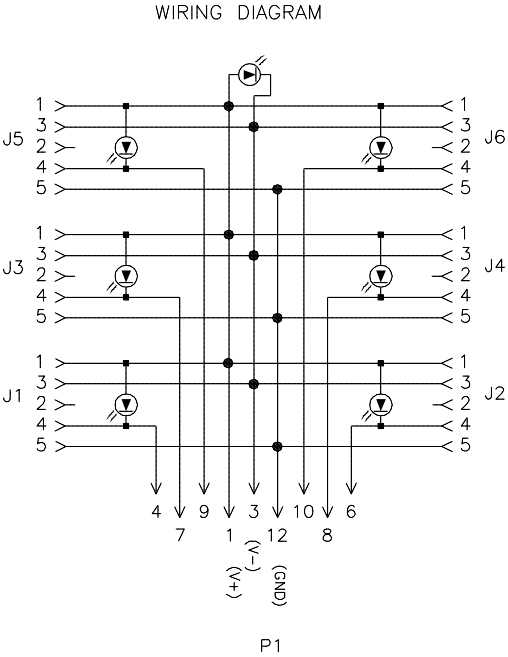

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.						DRFT RJP		DATE 9/15/96	
MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=1.5	
SEE SPECIFICATIONS				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
FINISH				MILLIMETER [INCH]		DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
SEE SPECIFICATIONS								U7009-5	
								REV	
								D	
D UPDATED CLOSURE CAPS				TV 09/15/15		48811		FILE: U7009-5	
REV DESCRIPTION				BY DATE ECO NO.				SHEET 1 OF 1	

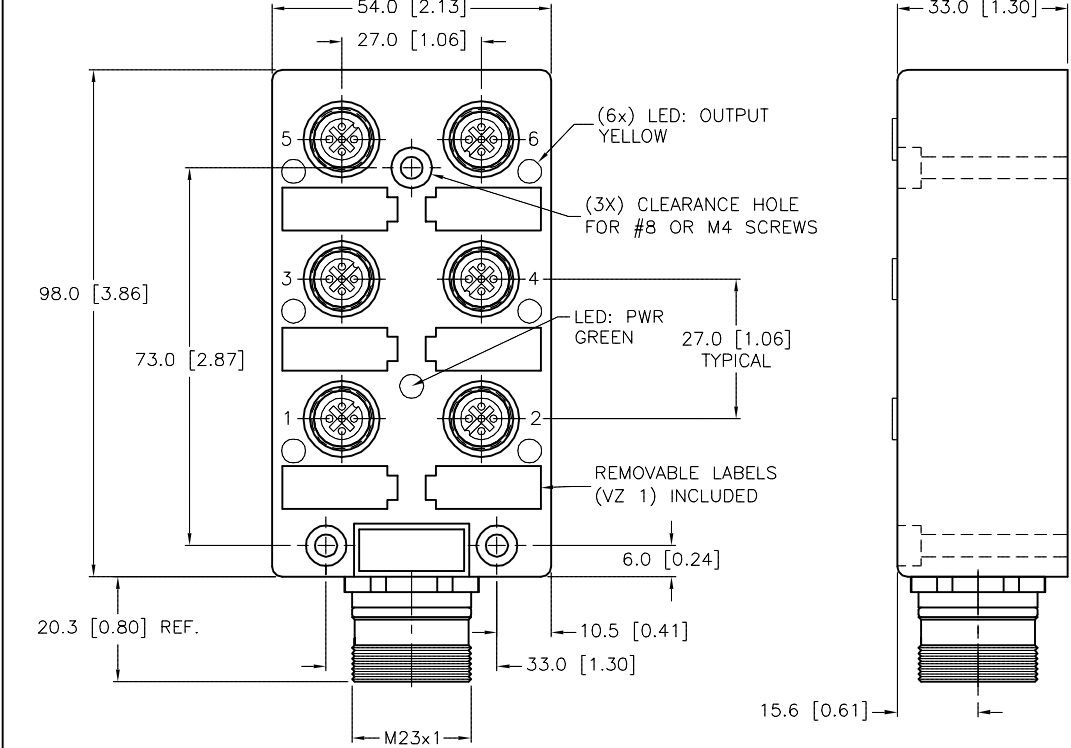

CLOSURE CAPS
(2 INCLUDED)