


SPECIFICATIONS	
CABLE DATA	
MATING CORDSET	CK 12-0 or CKN 12-9-*
MATERIAL	
HOUSING/COLOR	NYLON/BLE
CONTACT CARRIERS/COLOR	TPU/BLACK
RECEPTACLE HOUSINGS	NICKEL PLATED BRASS
CONTACTS	GOLD PLATED COPPER ALLOY
SEALING RING	VITON O-RING
CONNECTOR HOUSING	NICKEL PLATED BRASS
ELECTRICAL DATA	
MAXIMUM VOLTAGE	100 VDC
MAXIMUM CURRENT	4 AMPS PER PORT, 8 AMPS TOTAL
SPACINGS	VDE 0110 GROUP C
MECHANICAL DATA	
PROTECTION CLASS to DIN 40050	IP 67 ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to 90°C (-40°F to 194°F)

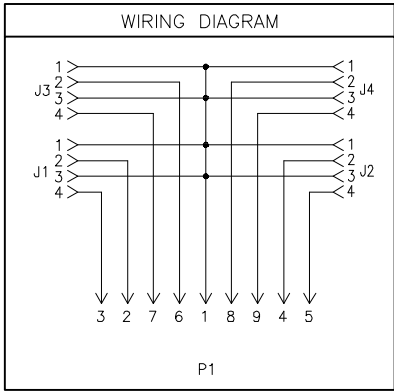

SOURCE DRAWING - FOR REFERENCE ONLY

NOTE:

1. HOUSING HEIGHT: 33.0 mm [1.30 in.]

E	UPDATE FEMALE END VIEW	KB	10/22/24	500000010631
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us
MATERIAL	DRFT DF	DATE 01/27/99	DESCRIPTION
FINISH	APVD DF	SCALE 1=1.5	VB 40.5N-CS12
UNIT OF MEASUREMENT		IDENTIFICATION NO.	REV
MILLIMETER [INCH]		U7016-18	E
DO NOT SCALE THIS DRAWING		FILE: U7016-18	SHEET 1 OF 1