

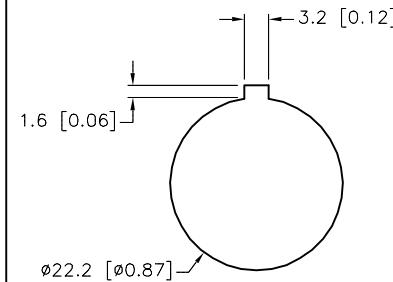


MALE END VIEW

FEMALE END VIEW




TYPICAL PANEL CUTOUT


mini fast DeviceNet™

mini fast DeviceNet™


SPECIFICATIONS

CONTACT CARRIER MATERIAL	TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
GASKET MATERIAL	NITRILE
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	600 V
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4 AND IEC IP67
ACCOMMODATES WALL THICKNESS	.040" (1.0 mm) to .875" (22.2 mm)

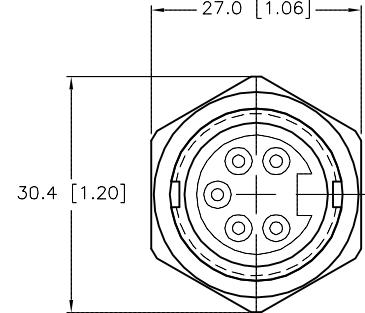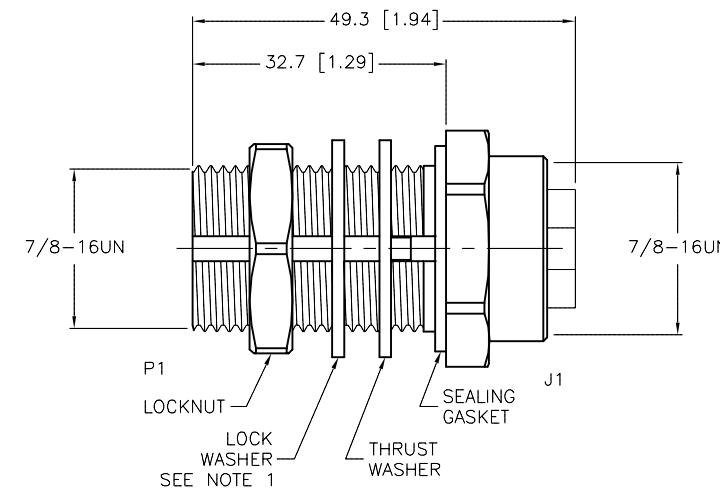
 LOCKNUT AND WASHERS
NOT SHOWN FOR
CLARITY


NOTE(S):

1. LOCK WASHER TO BE INSTALLED ON THREADS AS SHOWN.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us
1. 2. 3. 4.			DRFT	RDS	DATE 01/17/06
			APVD		DESCRIPTION RSFV RKFV 57/22 SCALE 1=1.0
		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY			UNIT OF MEASUREMENT MILLIMETER [INCH]
MATERIAL SEE SPECIFICATIONS					IDENTIFICATION NO. U7321
FINISH SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION			REV C
			DO NOT SCALE THIS DRAWING		FILE: U7321
					SHEET 1 OF 1

C DRAWING PROCESSED AS PART OF ECO 38872

KMY 05/10/12 38872

REV DESCRIPTION

BY DATE ECO NO.