


MALE END VIEW





- 1 = BARE (SHIELD)
- 2 = RED (+ VOLTAGE)
- 3 = BLACK (- VOLTAGE)
- 4 = WHITE (CAN_H)
- 5 = BLUE (CAN_L)





SPECIFICATIONS


CONTACT CARRIER MATERIAL	NYLON OR TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
HOUSING MATERIAL/PLATING	BRASS/NICKEL
NUMBER OF CONDUCTORS [AWG]	PCB PINS
TEMPERATURE RATING	-30°C to +80°C (-22°F to +176°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
MAX BOARD THICKNESS	2mm

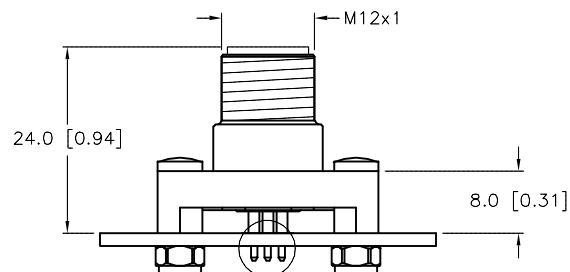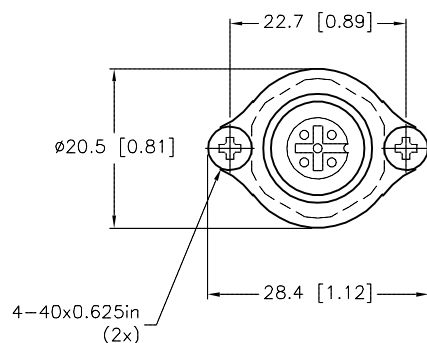

DIMENSIONAL VIEW

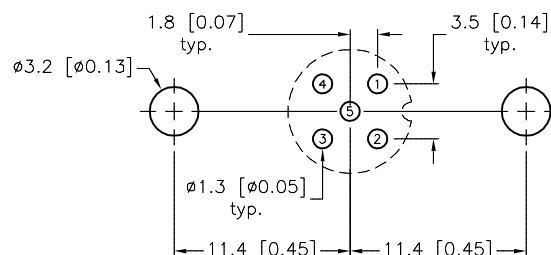

BOARD LAYOUT SCALE 2=1

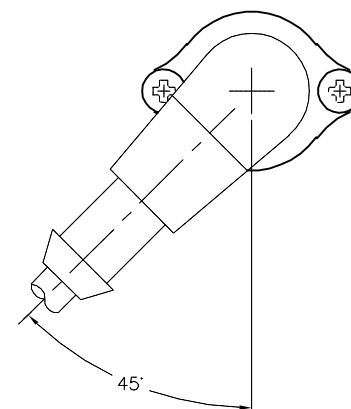

RIGHT ANGLE CONNECTOR ORIENTATION

NOTES:

- "C1101" DESIGNATES KEYWAY FOR CUSTOMER SPECIFIC.
- FOR OTHER RIGHT ANGLE CONNECTORS, ROTATE BOARD LAYOUT TO DESIRED ORIENTATION OR ROTATE 5-HOLE PINOUT IN INCREMENTS OF 60°.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. INSERT SHEET 10240199 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL SEE SPECIFICATIONS		DRFT DF APVD DF		DATE 08/01/00 SCALE 1=1.0		DESCRIPTION FS 57-PCB KIT/100/C1101	
FINISH SEE SPECIFICATIONS		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U7340-11		REV D	
DO NOT SCALE THIS DRAWING		CONTACT TURCK FOR MORE INFORMATION		FILE: U7340-11		SHEET 1 OF 1	

D	ADD SPECS & UPDATE SCREW LENGTH	NF	08/01/19	500000000281
REV	DESCRIPTION	BY	DATE	ECO. NO.