






FEMALE END VIEW	TERMINAL END VIEW	CONNECTION DIAGRAM	SPECIFICATIONS	
			HOUSING MATERIAL/COLOR	PBT (UL 94 VO)/BLACK
			RECEPTACLE THREADING MATL/PLATING	BRASS/NICKEL
			CONTACT CARRIERS/COLOR	PBT/BK
			CONTACTS MATERIAL/PLATING	BRASS/GOLD
			SEALING, RECEPTACLE	VITON O-RING
			SEALING, HOUSING	TPU FOAM
			TERMINATION METHOD	THREAD-CLAMPING (FIELD WIRABLE)
			MAX. WIRE SIZE [AWG]	16 AWG
			OPERATING VOLTAGE [V]	10-30 V
			OPERATING CURRENT [A]	2.0 A PER SIGNAL, 10.0 A TOTAL or 8.0 A PER SUPPLY
			PROTECTION CLASS to DIN 40050	IP 68 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
			OPERATING TEMPERATURE	-20°C to +90°C (-4°F to +194°F)

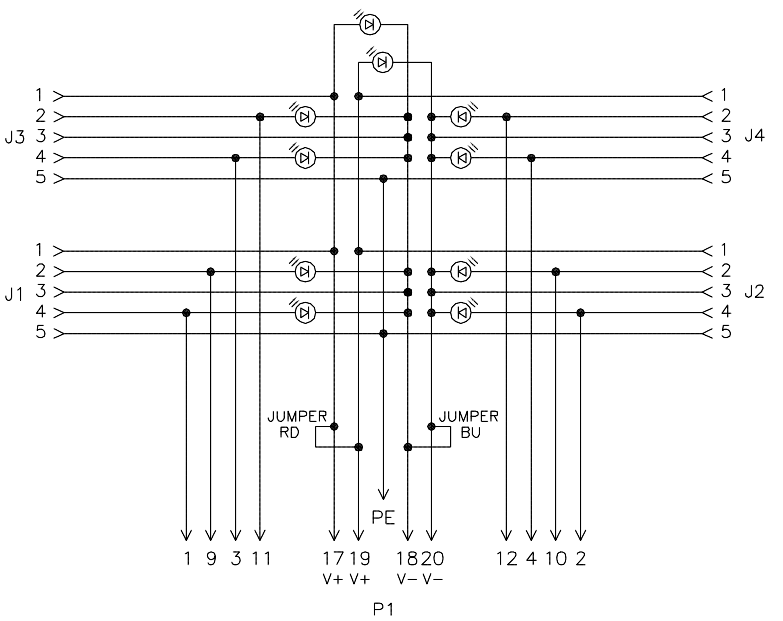


WIRING DIAGRAM
(FACTORY SETTING)

SOURCE DRAWING - FOR REFERENCE ONLY

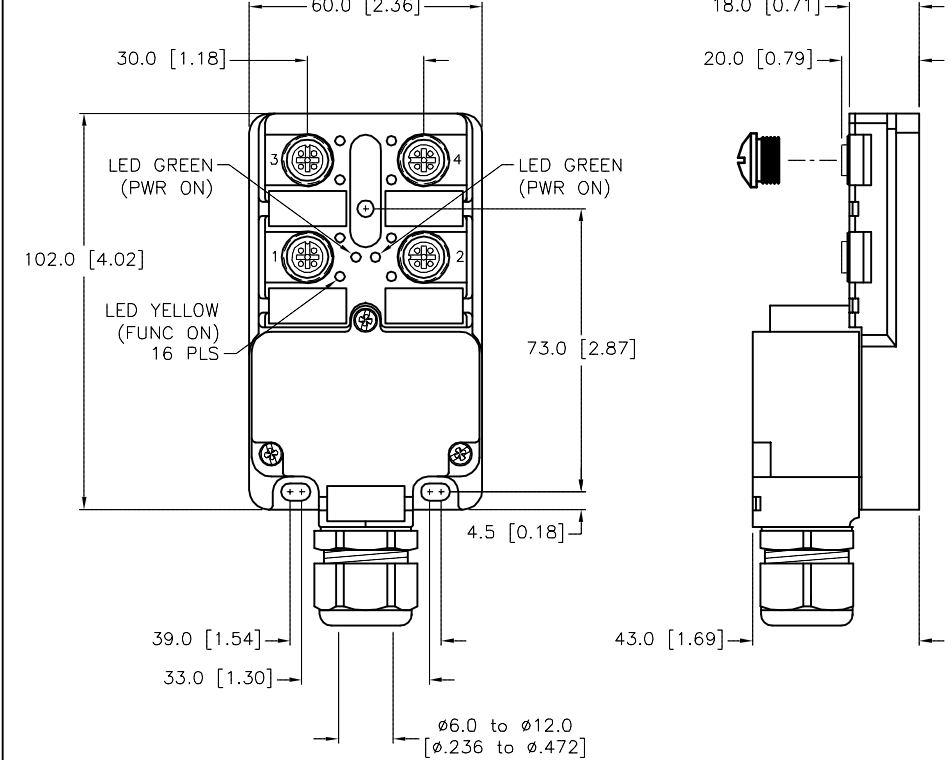

CLOSURE CAPS
(2 INCLUDED)

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK IAC High Technology Sensors and Automation Controls		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com		
1. 2. 3. 4.						DRFT JBJ		DATE 10/10/01		DESCRIPTION 4MB12-5P4-K-SK		
MATERIAL SEE SPECIFICATIONS				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=2.0				
FINISH SEE SPECIFICATIONS						UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U8018204		REV E		
E UPDATE CABLE GLAND RANGE				RDS	11/30/15	52456	DO NOT SCALE THIS DRAWING		FILE: U8018204		SHEET 1 OF 1	
REV DESCRIPTION				BY	DATE	ECO NO.						