



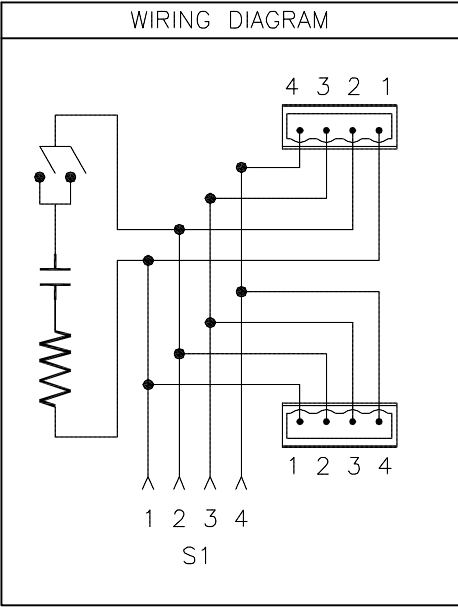



S1 CONNECTOR	TERMINAL BLOCK PLUGS	SPECIFICATIONS	
 <p>1 = - VOLTAGE 2 = + VOLTAGE 3 = SHIELD 4 = GROUND</p> <p>FOUNDATION™ fieldbus</p>	 <p>1 = - VOLTAGE 2 = + VOLTAGE 3 = SHIELD 4 = GROUND</p>	HOUSING MATERIAL/COLOR	NYLON 66 - 33% GLASS FILLED/BLACK
		RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
		CONTACT CARRIER MATERIAL	TPU/BLACK
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		OPERATING VOLTAGE	300 V
		OPERATING CURRENT	4.0 A PER CONDUCTOR
		OPTIONAL TERMINATOR RESISTOR	1 OF 2 SWITCHES IN "ON" POSITION
		PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
		OPERATING TEMPERATURE	-40°C to +70°C (-40°F to +158°F)

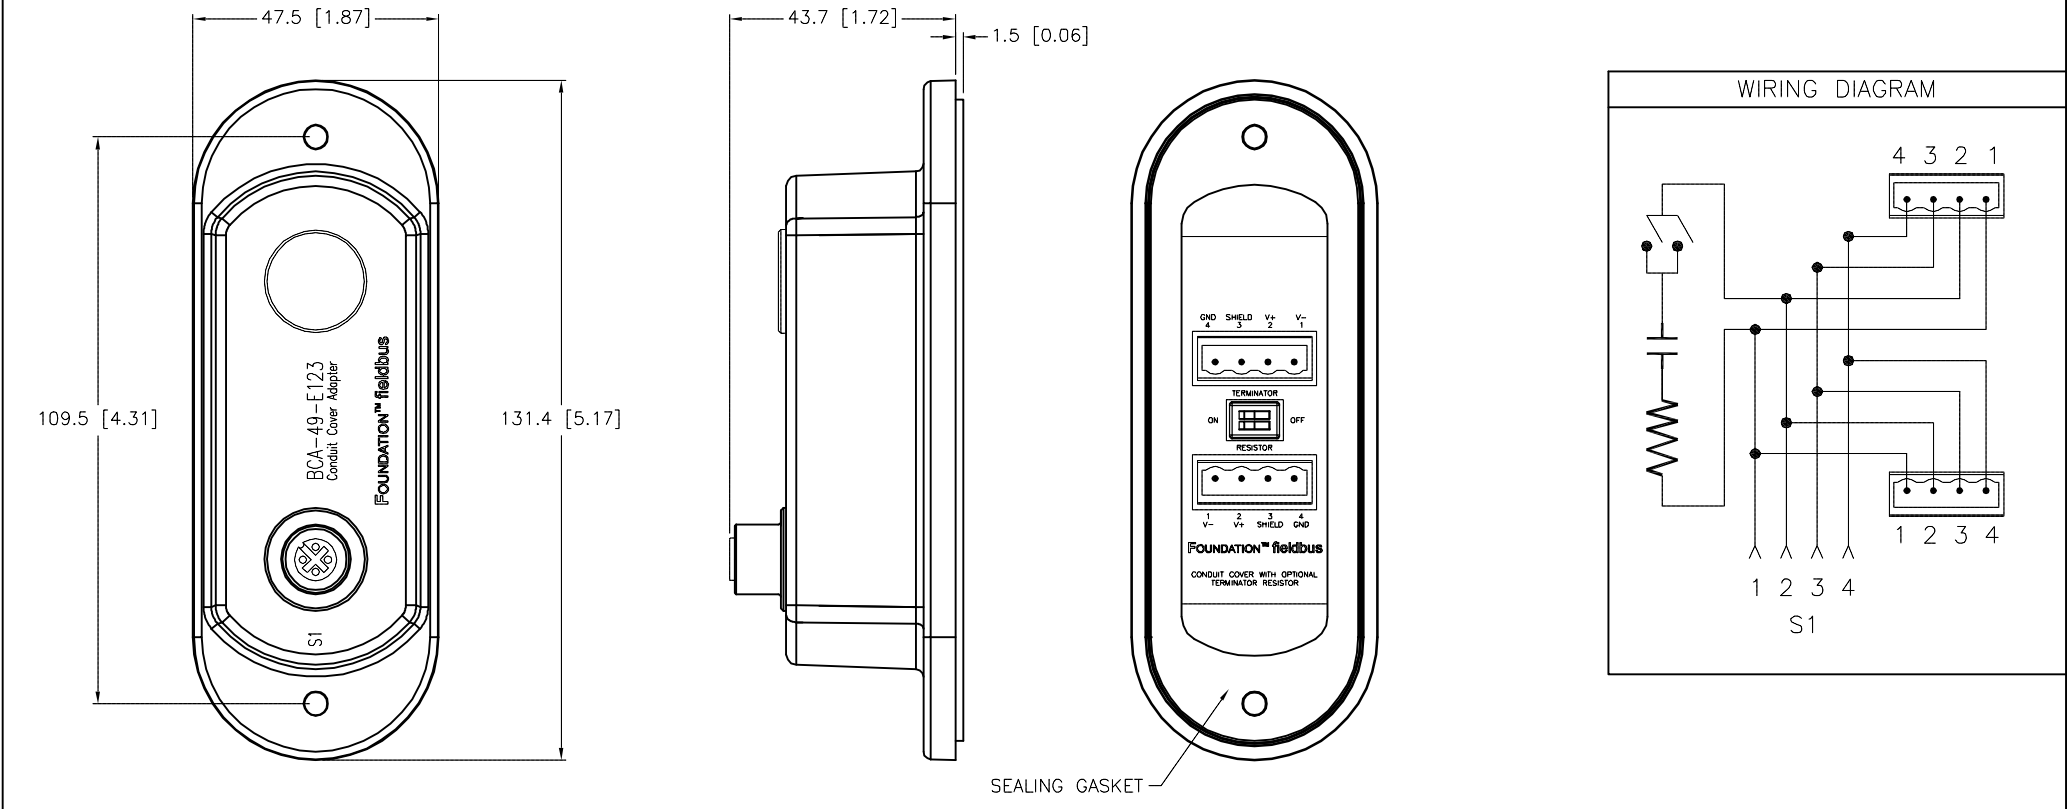


COVER SCREWS INCLUDED



FORM 8 CONDUIT BODIES:
10-24 SCREWS



MARK 9 CONDUIT BODIES:
8-32 SCREWS



F	ADDED THICKER GASKET	RDS	09/12/13	42993	RELATED DOCUMENTS 1. 2. 3. 4. MATERIAL FINISH		3RD ANGLE PROJECTION  ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. DRFT RDS APVD DF UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING		DATE 04/24/02 SCALE 1=1.5 DESCRIPTION BCA-49-E123 IDENTIFICATION NO. U8692-1 REV F	
REV	DESCRIPTION	BY	DATE	ECO NO.							FILE: U8692-1	SHEET 1 OF 1

SOURCE DRAWING - FOR REFERENCE ONLY

TURCK INC
High Technology Sensors and Automation Controls

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
turck.com