






SPECIFICATIONS			
HOUSING MATERIAL/COLOR	NYLON 66 - 33% GLASS FILLED/BLACK		
RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED		
CONTACT CARRIER MATERIAL	PA 12/BLACK		
CONTACT MATERIAL/PLATING	BRASS/GOLD		
OPERATING VOLTAGE	40 V		
OPERATING CURRENT	4 A EUROFAST, 8 A TERMINAL BLOCKS		
OPTIONAL TERMINATOR RESISTOR	1 OF 2 SWITCHES IN "ON" POSITION		
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE		
	COVERED WITH PLUGS OR CONNECTED		
OPERATING TEMPERATURE	-40°C to +70°C (-40°F to +158°F)		

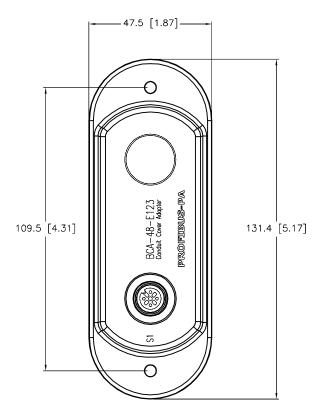

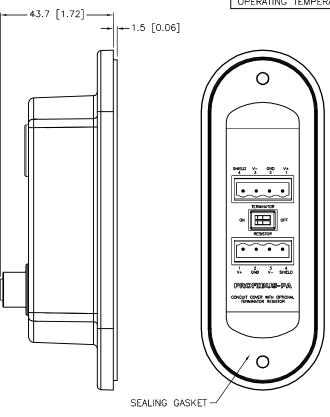

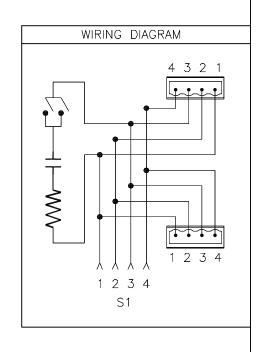





TERMINAL PLUGS INCLUDED

RELATED DOCUMENTS 3RD ANGLE PROJECTION 2. 3. MATERIAL ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY FINISH CONTACT TURCK FOR MORE INFORMATION

## turck inc

High Technology Sensors and Automation Controls

MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com

3000 CAMPUS DRIVE

DATE 04/24/02 RDS SCALE 1=1.5 DF

BCA-48-E123

SOURCE DRAWING - FOR REFERENCE ONLY

UNIT OF MEASUREMENT MILLIMETER [ INCH ]

DO NOT SCALE THIS DRAWING

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS

DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

IDENTIFICATION NO. REV U8698-1 FILE: U8698-1 SHEET 1 OF 1

ш	ADDED THICKER GASKET	RDS	09/12/13	42993
REV	DESCRIPTION	BY	DATE	ECO NO.