
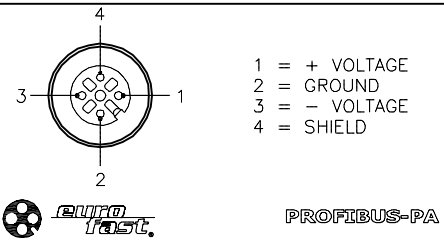
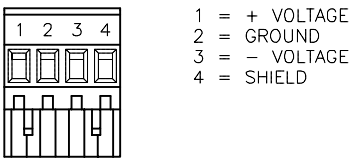
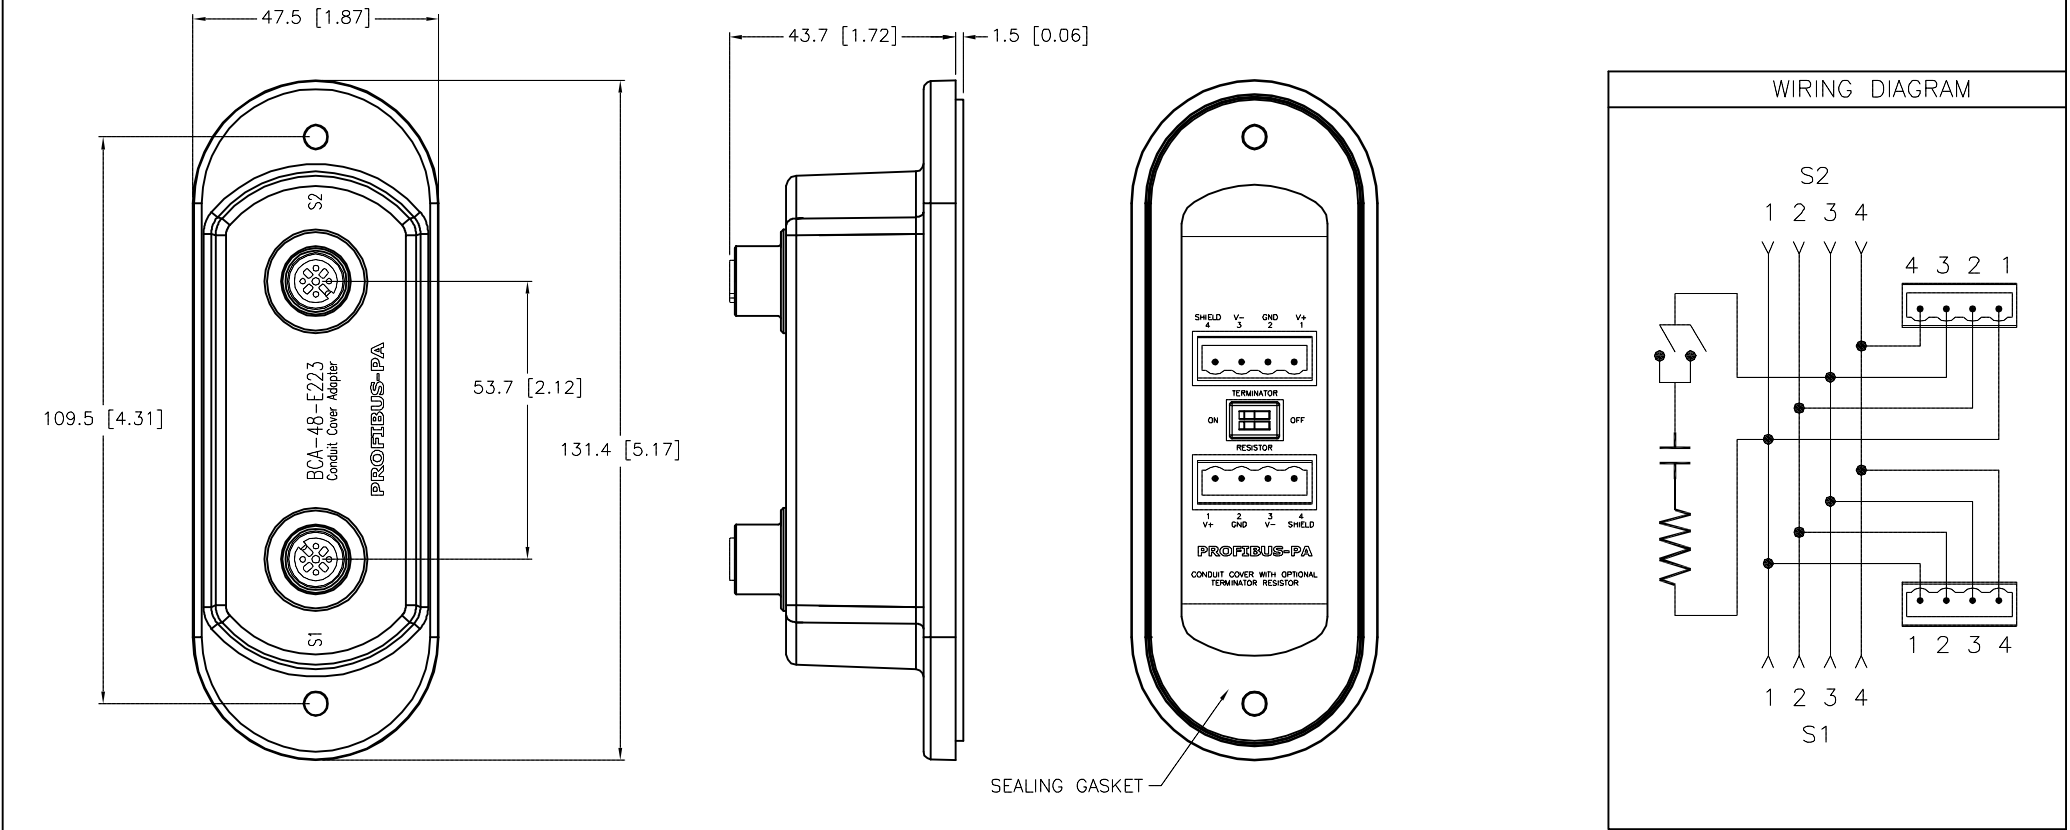

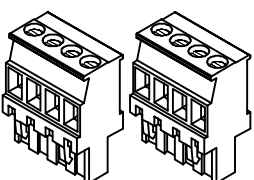


S1, S2 CONNECTORS		TERMINAL BLOCK PLUGS		SPECIFICATIONS	
				HOUSING MATERIAL/COLOR	NYLON 66 - 33% GLASS FILLED/BLACK
				RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
				CONTACT CARRIER MATERIAL	PA 12/BLACK
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				OPERATING VOLTAGE	40 V
				OPERATING CURRENT	4 A EUROFAST, 8 A TERMINAL BLOCK
				OPTIONAL TERMINATOR RESISTOR	1 OF 2 SWITCHES IN "ON" POSITION
				PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
				OPERATING TEMPERATURE	-40°C to +70°C (-40°F to +158°F)



COVER SCREWS INCLUDED				TERMINAL PLUGS INCLUDED				SOURCE DRAWING - FOR REFERENCE ONLY			
 <p>FORM 8 CONDUIT BODIES: 10-24 SCREWS</p>				 <p>TERMINAL PLUGS INCLUDED</p>				<p>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</p>			
 <p>MARK 9 CONDUIT BODIES: 8-32 SCREWS</p>								<p>TURCK INC High Technology Sensors and Automation Controls</p>			
								<p>DATE 04/24/02 SCALE 1=1.5</p>			
								<p>DESCRIPTION BCA-48-E223</p>			
								<p>UNIT OF MEASUREMENT MILLIMETER [INCH]</p>			
								<p>IDENTIFICATION NO. U8698-2</p>			
								<p>REV E</p>			
								<p>FILE: U8698-2</p>			
								<p>SHEET 1 OF 1</p>			