








J1 CONNECTOR	TERMINAL BLOCK PLUGS	SPECIFICATIONS	
 <p>1 = DRAIN 2 = + VOLTAGE 3 = - VOLTAGE 4 = CAN_H 5 = CAN_L</p>	 <p>1 = - VOLTAGE 2 = CAN_L 3 = DRAIN 4 = CAN_H 5 = + VOLTAGE</p>	HOUSING MATERIAL/COLOR	NYLON 66 - 33% GLASS FILLED/BLACK
 <p>DeviceNet™</p>	 <p>DeviceNet™</p>	RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
		CONTACT CARRIER/COLOR	PA 12/BLUE-GREY
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		OPERATING VOLTAGE	40 V
		OPERATING CURRENT	4 A
		OPTIONAL TERMINATOR RESISTOR	1 OF 2 SWITCHES IN "ON" POSITION
		PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
		OPERATING TEMPERATURE	-30°C to +80°C (-22°F to +176°F)




COVER SCREWS INCLUDED



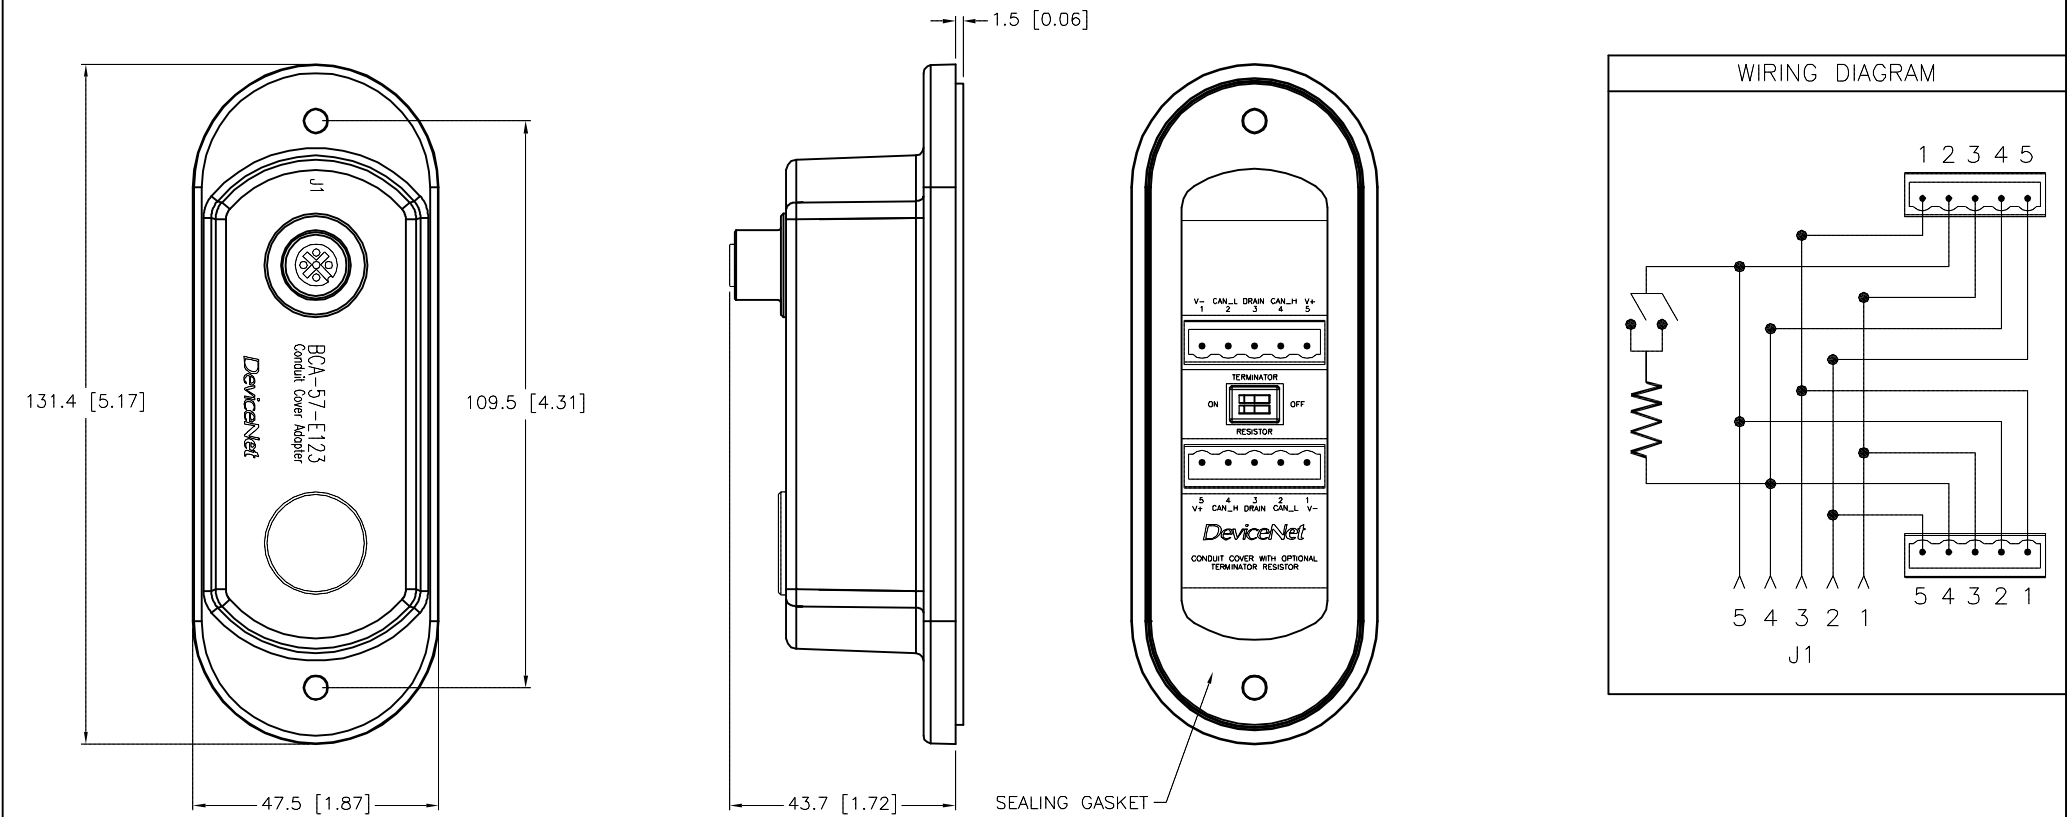FORM 8 CONDUIT BODIES:
10-24 SCREWS




MARK 9 CONDUIT BODIES:
8-32 SCREWS

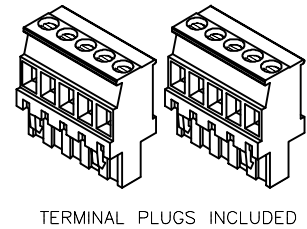

E	ADD THICKER GASKET	RDS	09/12/13	42993				
REV	DESCRIPTION	BY	DATE	ECO NO.				

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		<div><div>TURCK INC</div><div>High Technology Sensors and Automation Controls</div></div>		<div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</div>		
								
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE	04/26/02	DESCRIPTION BCA-57-E123		
APVD		DF	SCALE	1 = 1.5				
FINISH		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO.		REV
						U8699-1		E
		DO NOT SCALE THIS DRAWING			FILE: U8699-1		SHEET 1 OF 1	