
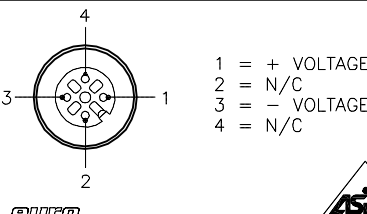
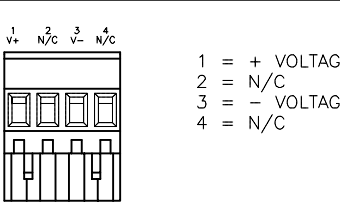


S1 CONNECTOR	TERMINAL BLOCK PLUGS	SPECIFICATIONS	
<div></div>	<div></div>	HOUSING MATERIAL/COLOR	NYLON 66 - 33% GLASS FILLED/BLACK
		RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
		CONTACT CARRIER MATERIAL	PA 12/BLACK
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		OPERATING VOLTAGE	300 V
		OPERATING CURRENT	4.0 A PER CONDUCTOR
		PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
		OPERATING TEMPERATURE	-30°C to +80°C (-22°F to +176°F)

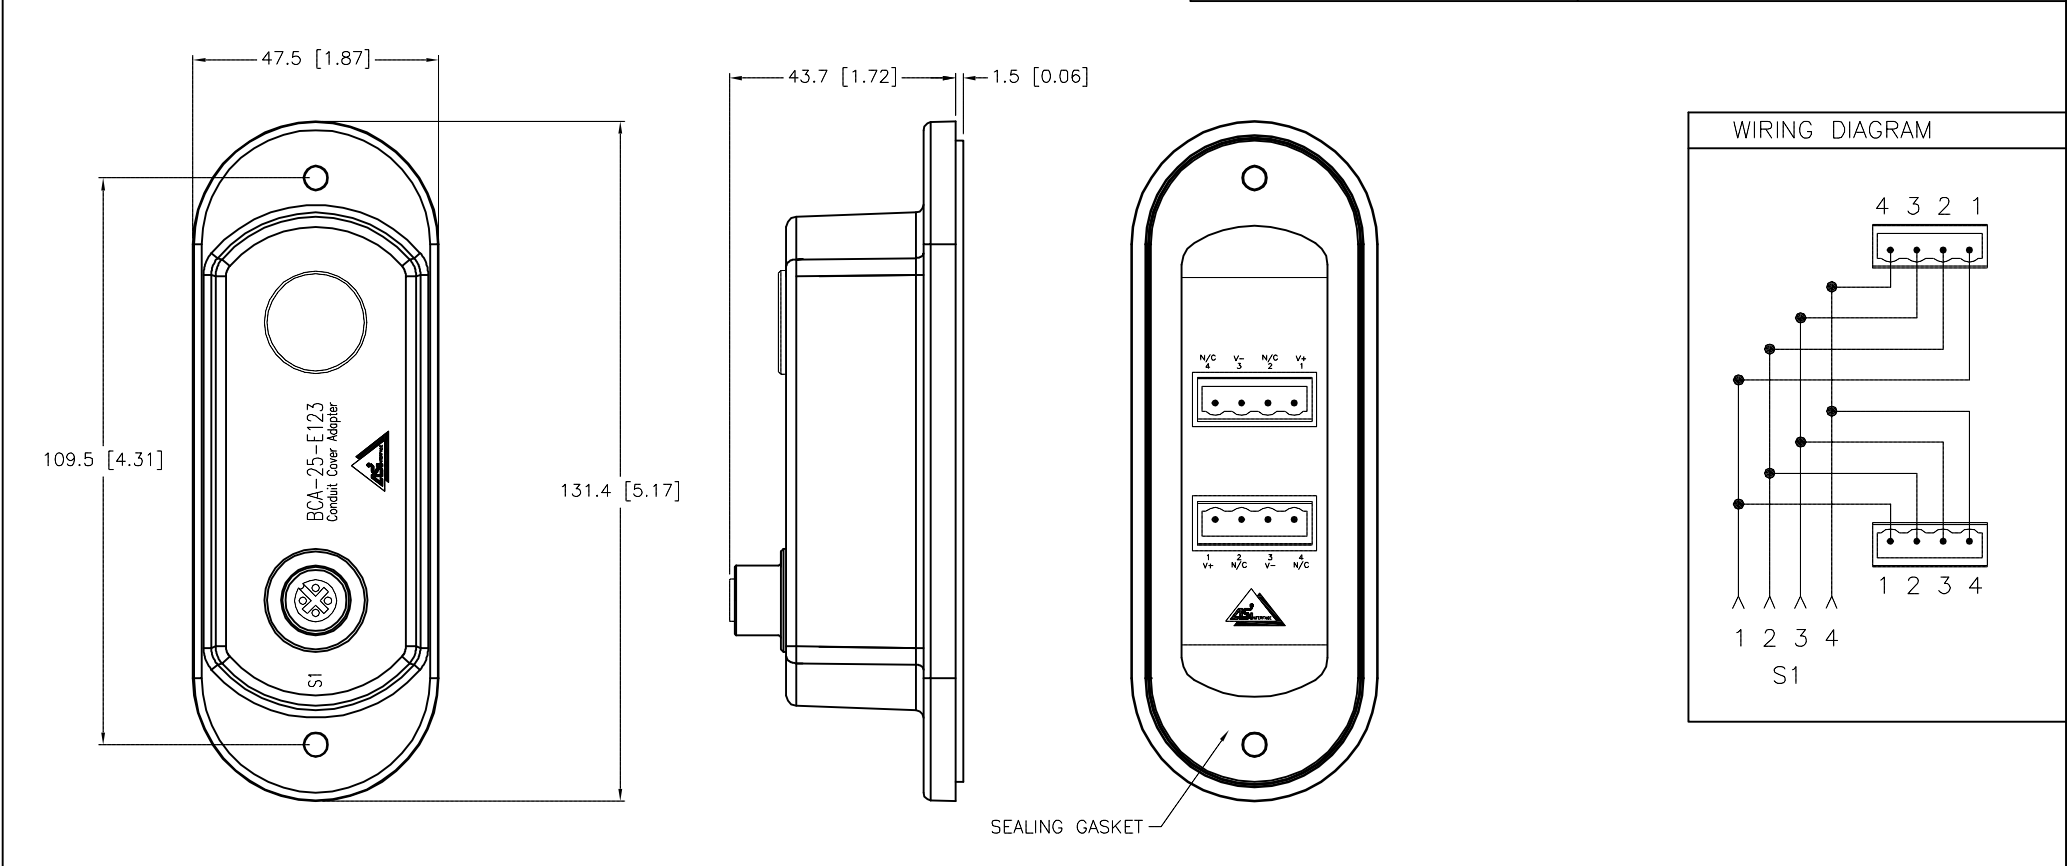

COVER SCREWS INCLUDED

FORM 8 CONDUIT BODIES:  
10-24 SCREWS

MARK 9 CONDUIT BODIES:  
8-32 SCREWS

TERMINAL BLOCKS INCLUDED

E	ADD THICKER GASKET	RDS	09/12/13	42993
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS

- 1.
- 2.
- 3.
- 4.

MATERIAL

FINISH

3RD ANGLE PROJECTION

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT

RDS

DATE 04/29/02

APVD

DF

SCALE 1=1.5

UNIT OF MEASUREMENT

MILLIMETER [ INCH ]

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE

MINNEAPOLIS, MN 55441

1-800-544-7769

(763) 553-7300

(763) 553-0708 fax

turck.com

TURCK INC

High Technology Sensors and Automation Controls

DESCRIPTION

BCA-25-E123

IDENTIFICATION NO.

U8700-1

REV

E