

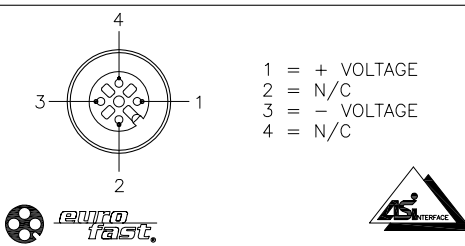
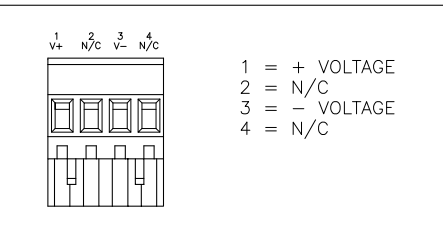
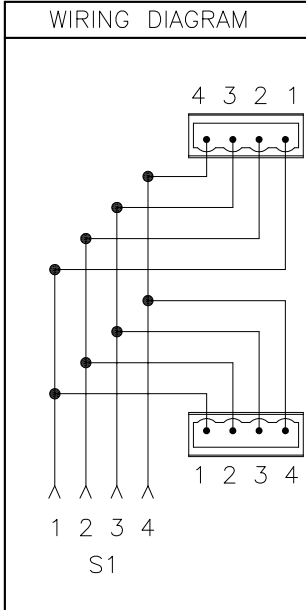


S1 CONNECTOR		TERMINAL BLOCK PLUGS		SPECIFICATIONS																	
<div></div>		<div></div>		<table><tr><td>HOUSING MATERIAL/COLOR</td><td>NYLON 66 – 33% GLASS FILLED/BLACK</td></tr><tr><td>RECEPTACLE HOUSING MATERIAL/FINISH</td><td>STAINLESS STEEL/PASSIVATED</td></tr><tr><td>CONTACT CARRIER MATERIAL</td><td>PA 12/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>OPERATING VOLTAGE</td><td>300 V</td></tr><tr><td>OPERATING CURRENT</td><td>4.0 A PER CONDUCTOR</td></tr><tr><td>PROTECTION CLASS to DIN 40050</td><td>IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED</td></tr><tr><td>OPERATING TEMPERATURE</td><td>–30°C to +80°C (–22°F to +176°F)</td></tr></table>		HOUSING MATERIAL/COLOR	NYLON 66 – 33% GLASS FILLED/BLACK	RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED	CONTACT CARRIER MATERIAL	PA 12/BLACK	CONTACT MATERIAL/PLATING	BRASS/GOLD	OPERATING VOLTAGE	300 V	OPERATING CURRENT	4.0 A PER CONDUCTOR	PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED	OPERATING TEMPERATURE	–30°C to +80°C (–22°F to +176°F)
HOUSING MATERIAL/COLOR	NYLON 66 – 33% GLASS FILLED/BLACK																				
RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED																				
CONTACT CARRIER MATERIAL	PA 12/BLACK																				
CONTACT MATERIAL/PLATING	BRASS/GOLD																				
OPERATING VOLTAGE	300 V																				
OPERATING CURRENT	4.0 A PER CONDUCTOR																				
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED																				
OPERATING TEMPERATURE	–30°C to +80°C (–22°F to +176°F)																				

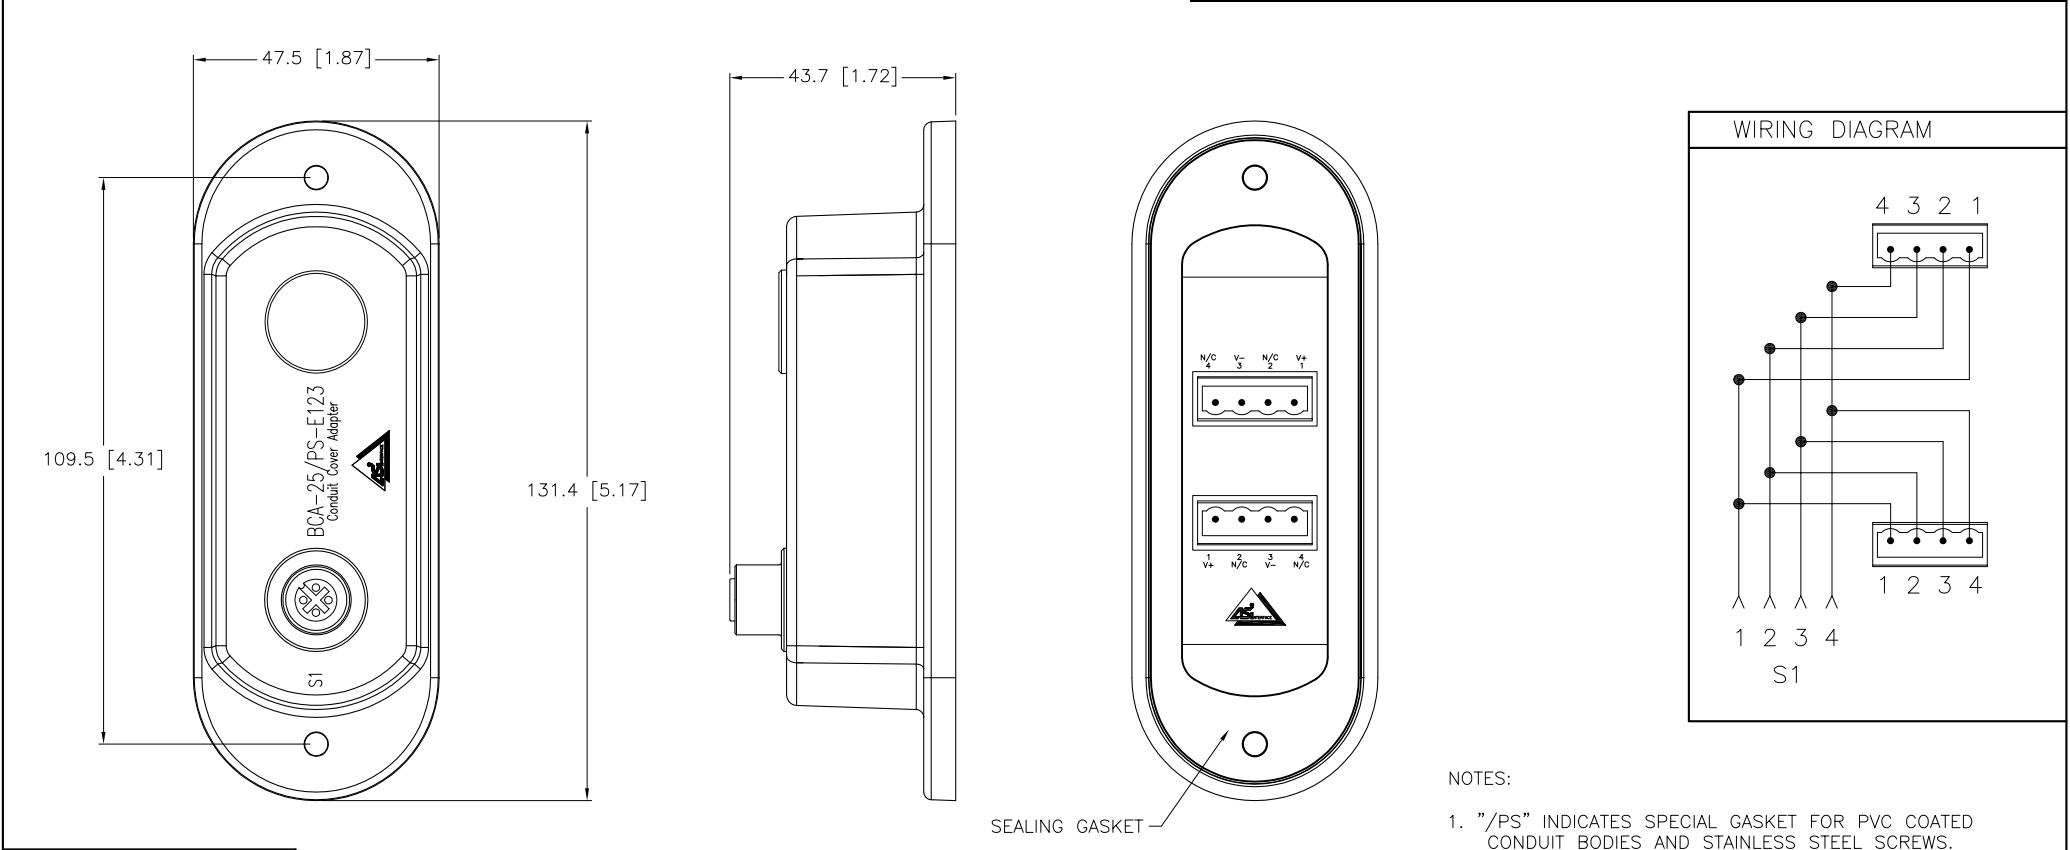


NOTES:


1. "/PS" INDICATES SPECIAL GASKET FOR PVC COATED CONDUIT BODIES AND STAINLESS STEEL SCREWS.




STAINLESS STEEL COVER SCREWS INCLUDED






FORM 8 CONDUIT BODIES:
10-24 SCREWS



MARK 9 CONDUIT BODIES:
8-32 SCREWS



C	UPDATE MOUNTING HOLE DIMENSION	CK	04/29/11	34946
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION		THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		<div><div></div><div>High Technology Sensors and Automation Controls</div></div>		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com		
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT	RDS	DATE	03/31/05			DESCRIPTION BCA-25/PS-E123
			DSGN	SCALE	1=1.5				
FINISH			CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO. U8700-113		
			DO NOT SCALE THIS DRAWING			FILE: U8700-113			SHEET 1 OF 1