



S1, S2 CONNECTORS



1 = + VOLTAGE
2 = N/C
3 = - VOLTAGE
4 = N/C





TERMINAL BLOCK PLUGS




1 = + VOLTAGE
2 = N/C
3 = - VOLTAGE
4 = N/C

SPECIFICATIONS


HOUSING MATERIAL/COLOR	NYLON 66 – 33% GLASS FILLED/BLACK
RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
CONTACT CARRIER MATERIAL	PA 12/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	300 V
OPERATING CURRENT	4.0 A PER CONDUCTOR
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to +80°C (-22°F to +176°F)

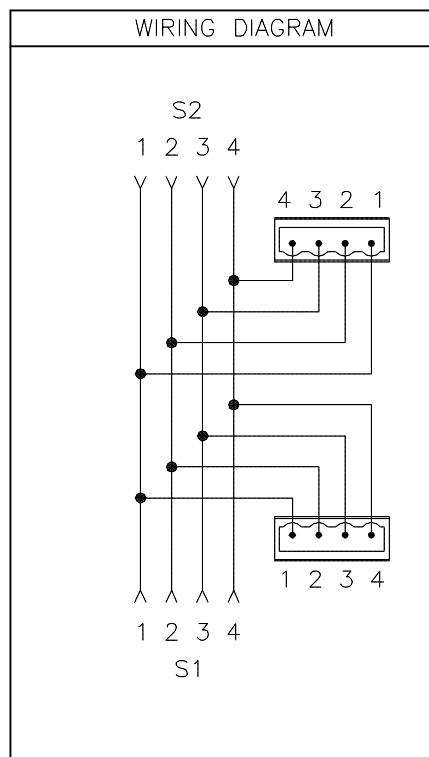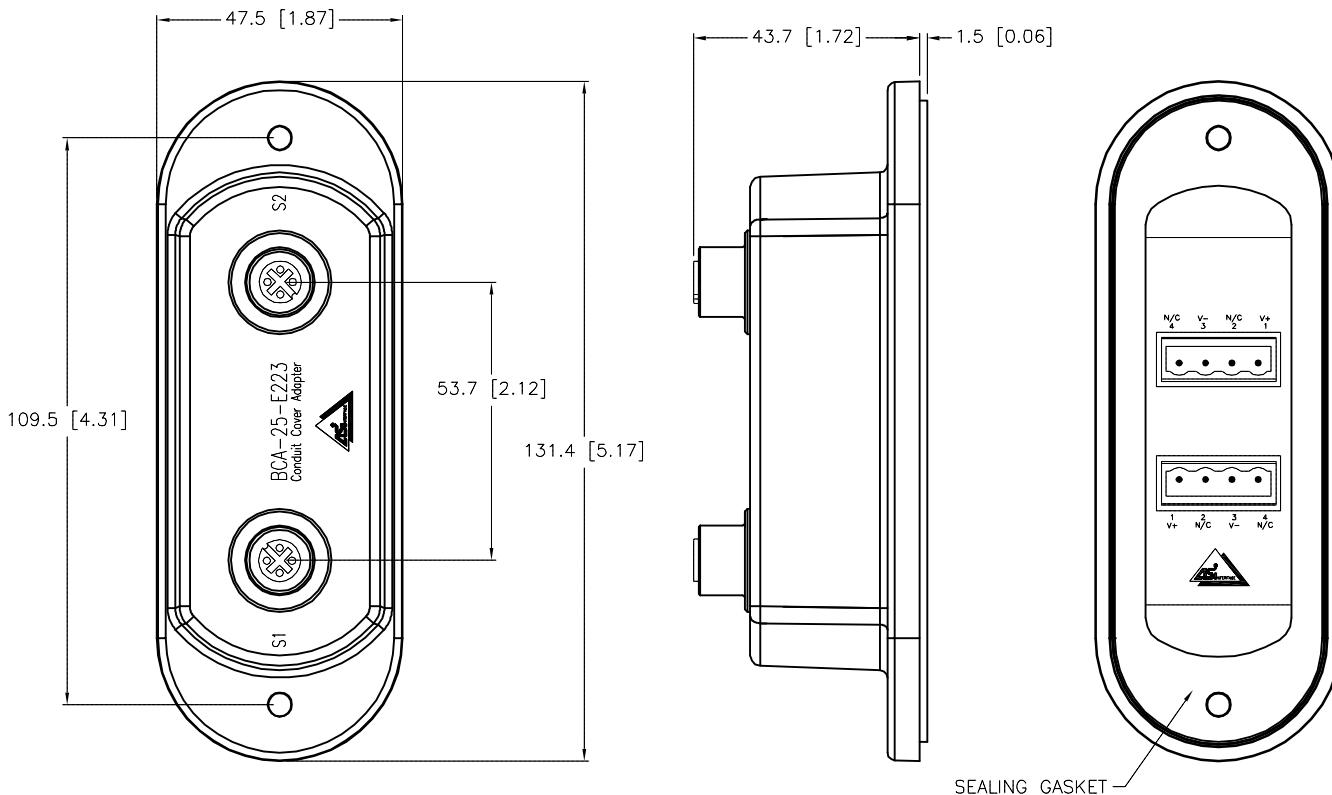


COVER SCREWS INCLUDED



FORM 8 CONDUIT BODIES:
10-24 SCREWS



MARK 9 CONDUIT BODIES:
8-32 SCREWS



TERMINAL BLOCKS INCLUDED

RELATED DOCUMENTS

- 1.
- 2.
- 3.
- 4.

3RD ANGLE PROJECTION



THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

MATERIAL

DRFT

RDS

APVD

DF

DATE 04/26/02

SCALE 1=1.5

TURCK INC
High Technology Sensors and Automation Controls

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0700 fax
turck.com

SOURCE DRAWING - FOR REFERENCE ONLY

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

DESCRIPTION
BCA-25-E223

IDENTIFICATION NO.
U8700-2

FILE: U8700-2

REV
E

SHEET 1 OF 1

E ADD THICKER GASKET RDS 09/12/13 43993

REV DESCRIPTION BY DATE ECO NO.