




S1, S2 CONNECTORS

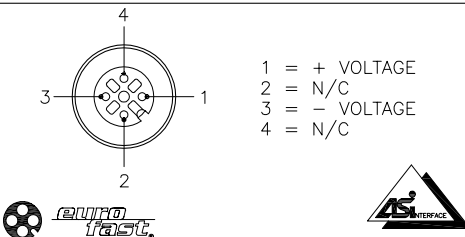



TERMINAL BLOCK PLUGS

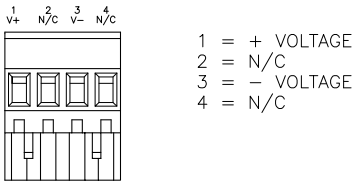


SPECIFICATIONS	
HOUSING MATERIAL/COLOR	NYLON 66 - 33% GLASS FILLED/BLACK
RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
CONTACT CARRIER MATERIAL	PA 12/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	300 V
OPERATING CURRENT	4.0 A PER CONDUCTOR
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to +80°C (-22°F to +176°F)

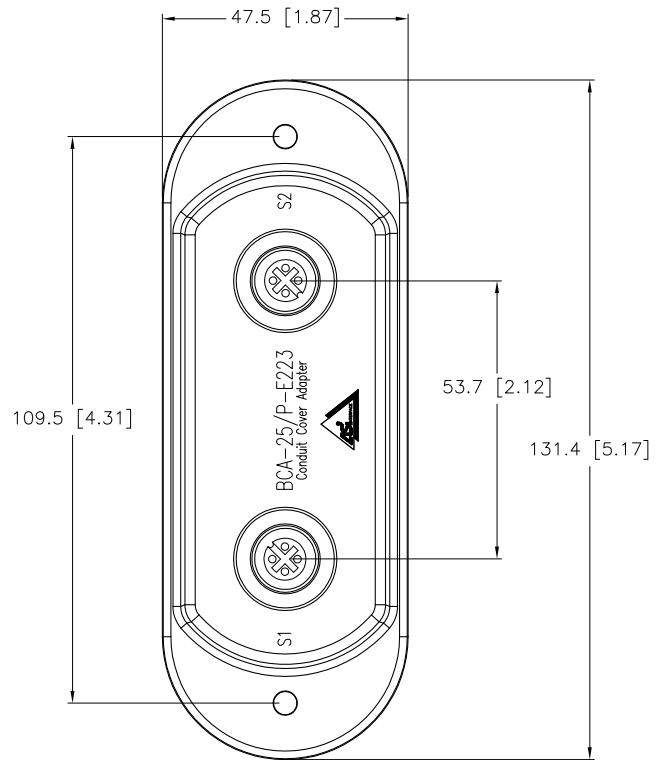

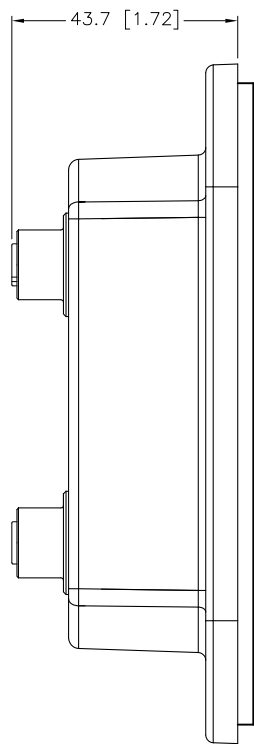


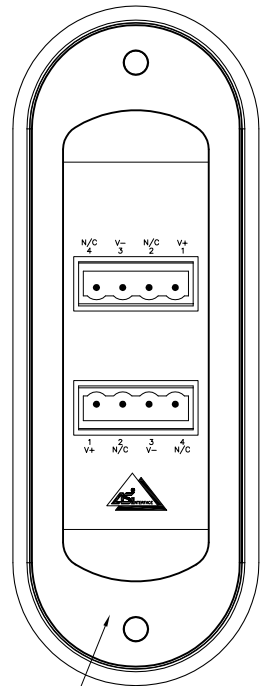

WIRING DIAGRAM

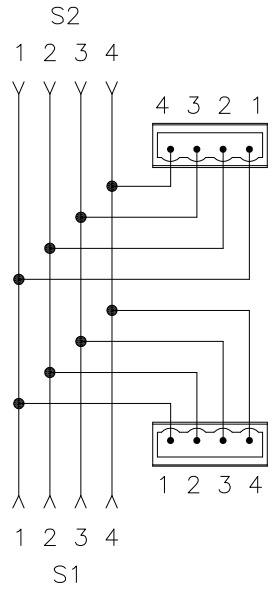


COVER SCREWS INCLUDED



FORM 8 CONDUIT BODIES:
10-24 SCREWS

MARK 9 CONDUIT BODIES:
8-32 SCREWS



TERMINAL BLOCKS INCLUDED


NOTES:

1. "/P" INDICATES SPECIAL GASKET FOR PVC COATED CONDUIT BODIES.

RELATED DOCUMENTS

1. 2. 3. 4.

3RD ANGLE PROJECTION



THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT RDS DATE 09/12/03 DSGN DF SCALE 1=1.5

UNIT OF MEASUREMENT
MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
turck.com

TURCK INC
High Technology Sensors and Automation Controls

DESCRIPTION
BCA-25/P-E223

IDENTIFICATION NO.
U8700-22

REV
D

D	UPDATE MOUNTING HOLE DIMENSION	CK	04/29/11	34946
REV	DESCRIPTION	BY	DATE	ECO NO.