



S1, S2 CONNECTORS



1 = + VOLTAGE
2 = N/C
3 = - VOLTAGE
4 = N/C





TERMINAL BLOCK PLUGS




1 = + VOLTAGE
2 = N/C
3 = - VOLTAGE
4 = N/C

SPECIFICATIONS


HOUSING MATERIAL/COLOR	NYLON 66 – 33% GLASS FILLED/BLACK
RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
CONTACT CARRIER MATERIAL	PA 12/BLACK
GASKET MATERIAL	PE
MOUNTING SCREWS	STAINLESS STEEL
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	300 V
OPERATING CURRENT	4.0 A PER CONDUCTOR
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to +80°C (-22°F to +176°F)

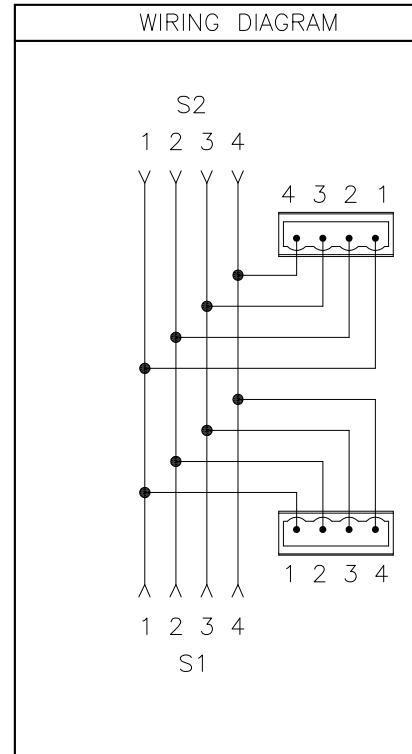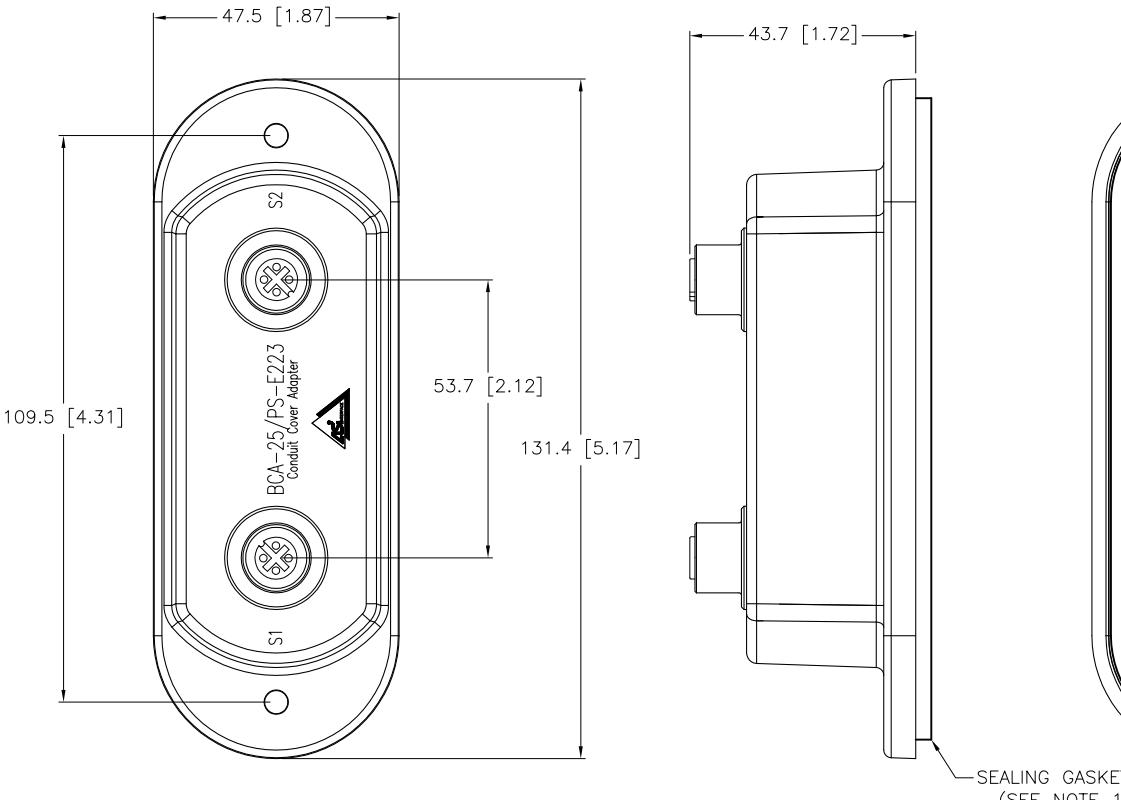


COVER SCREWS INCLUDED



FORM 8 CONDUIT BODIES:
10-24 SCREWS

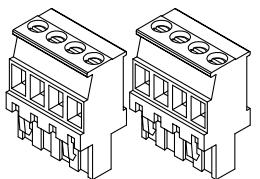

TERMINAL BLOCKS INCLUDED



MARK 9 CONDUIT BODIES:
8-32 SCREWS

NOTES:

1. "PS" INDICATES SPECIAL GASKET FOR PVC COATED CONDUIT BODIES AND STAINLESS STEEL SCREWS.


C UPDATE MOUNTING HOLE DIMENSION CK 04/29/11 34946

REV DESCRIPTION BY DATE ECO NO.

RELATED DOCUMENTS

- 1.
- 2.
- 3.
- 4.

3RD ANGLE PROJECTION



THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

MATERIAL

DRFT

DF

DSGN

SCALE

1=1.5

FINISH

UNIT OF MEASUREMENT

CONTACT TURCK FOR MORE INFORMATION

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

TURCK INC
High Technology Sensors and Automation Controls

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
turck.com

BCA-25/PS-E223

IDENTIFICATION NO. U8700-223

REV C

FILE: U8700-223

SHEET 1 OF 1

SOURCE DRAWING - FOR REFERENCE ONLY