




J1 CONNECTOR	TERMINAL BLOCK PLUGS	SPECIFICATIONS	
 1 = - VOLTAGE 2 = + VOLTAGE 3 = SHIELD 4 = GROUND 	 1 = - VOLTAGE 2 = + VOLTAGE 3 = SHIELD 4 = GROUND V- V+ SHLD GND	HOUSING MATERIAL/COLOR	NYLON 66 - 33% GLASS FILLED/BLACK
		RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
		CONTACT CARRIERS/COLOR	TPU/BLACK
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		OPERATING VOLTAGE	300 V
		OPERATING CURRENT	9.0 A MINIFAST, 8 A TERMINAL BLOCK
		PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
		OPERATING TEMPERATURE	-30°C to +80°C (-22°F to +176°F)




COVER SCREWS INCLUDED

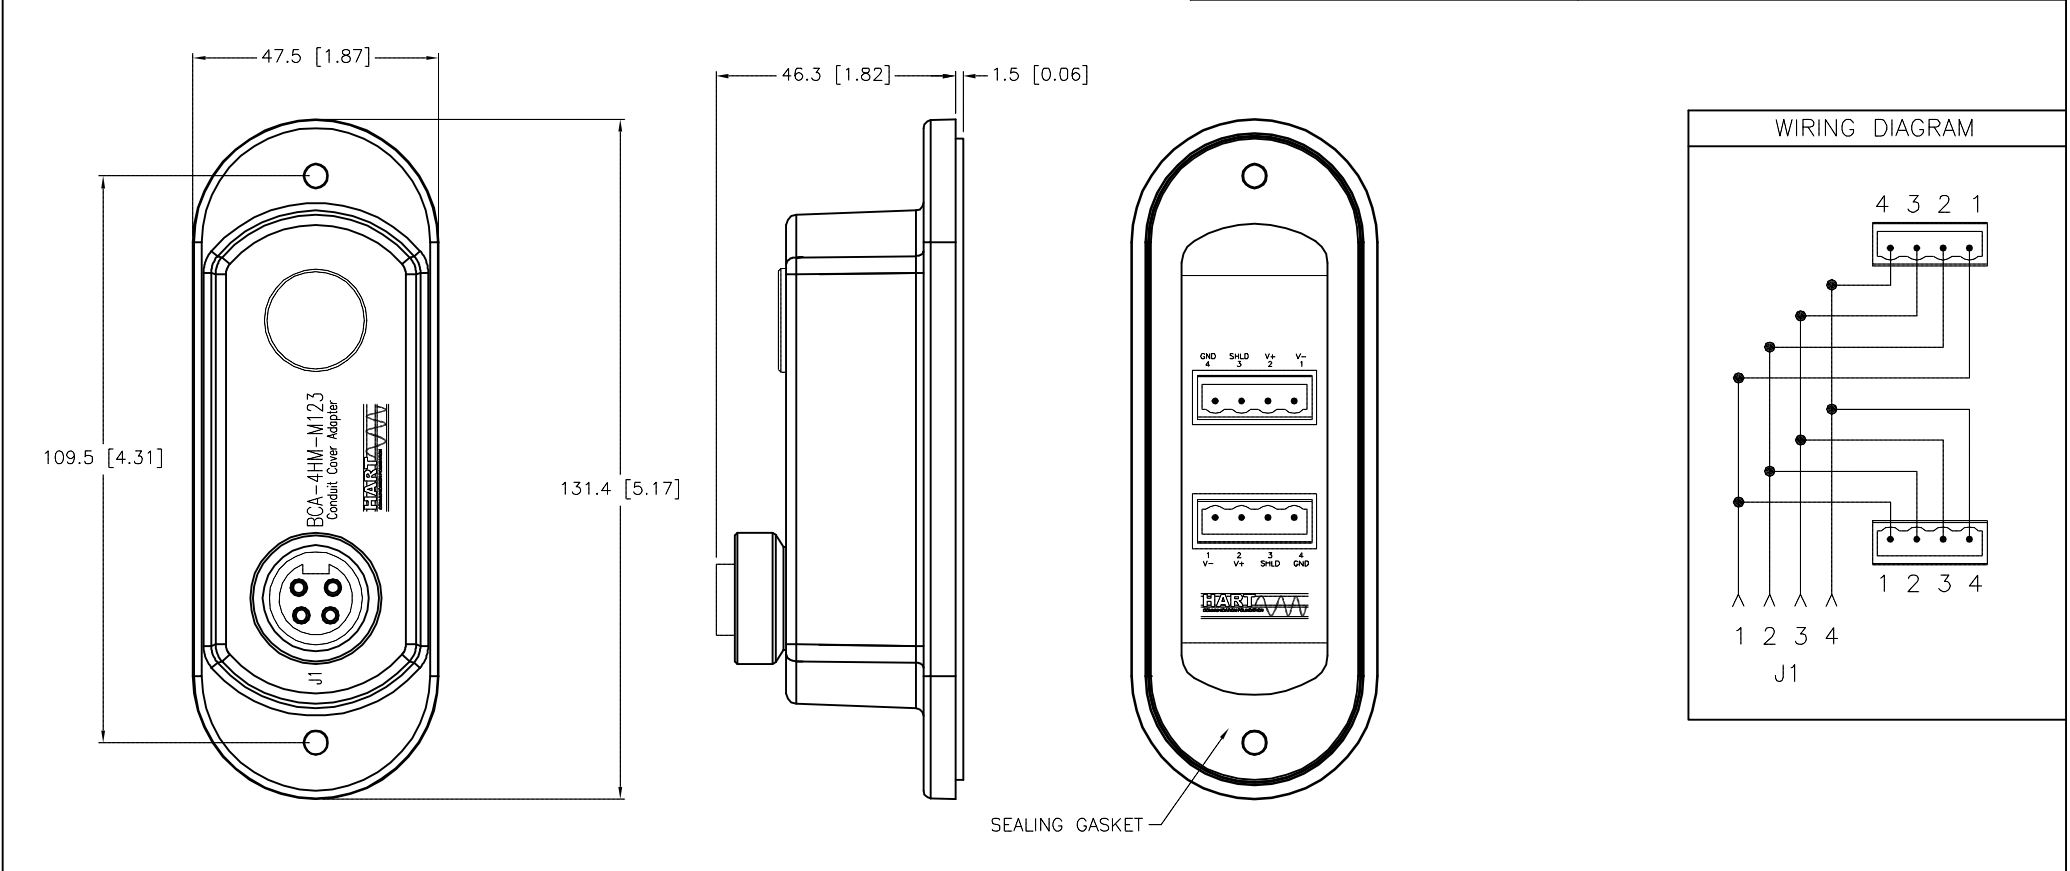

FORM 8 CONDUIT BODIES:
10-24 SCREWS

MARK 9 CONDUIT BODIES:
8-32 SCREWS



TERMINAL BLOCKS INCLUDED

E	ADD THICKER GASKET	RDS	09/12/13	42993	FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING			L
REV	DESCRIPTION	BY	DATE	ECO NO.			FILE: U8917-13		