




J1,J2 CONNECTORS		TERMINAL BLOCK PLUGS		SPECIFICATIONS	
				HOUSING MATERIAL/COLOR	NYLON 66 - 33% GLASS FILLED/BLACK
				RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
				CONTACT CARRIER MATERIAL	TPU/BLACK
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				OPERATING VOLTAGE	250 V
				OPERATING CURRENT	4.0 A EUROFAST, 8.0 A TERMINAL BLOCK
				PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
				OPERATING TEMPERATURE	-30°C to +80°C (-22°F to +176°F)




COVER SCREWS INCLUDED

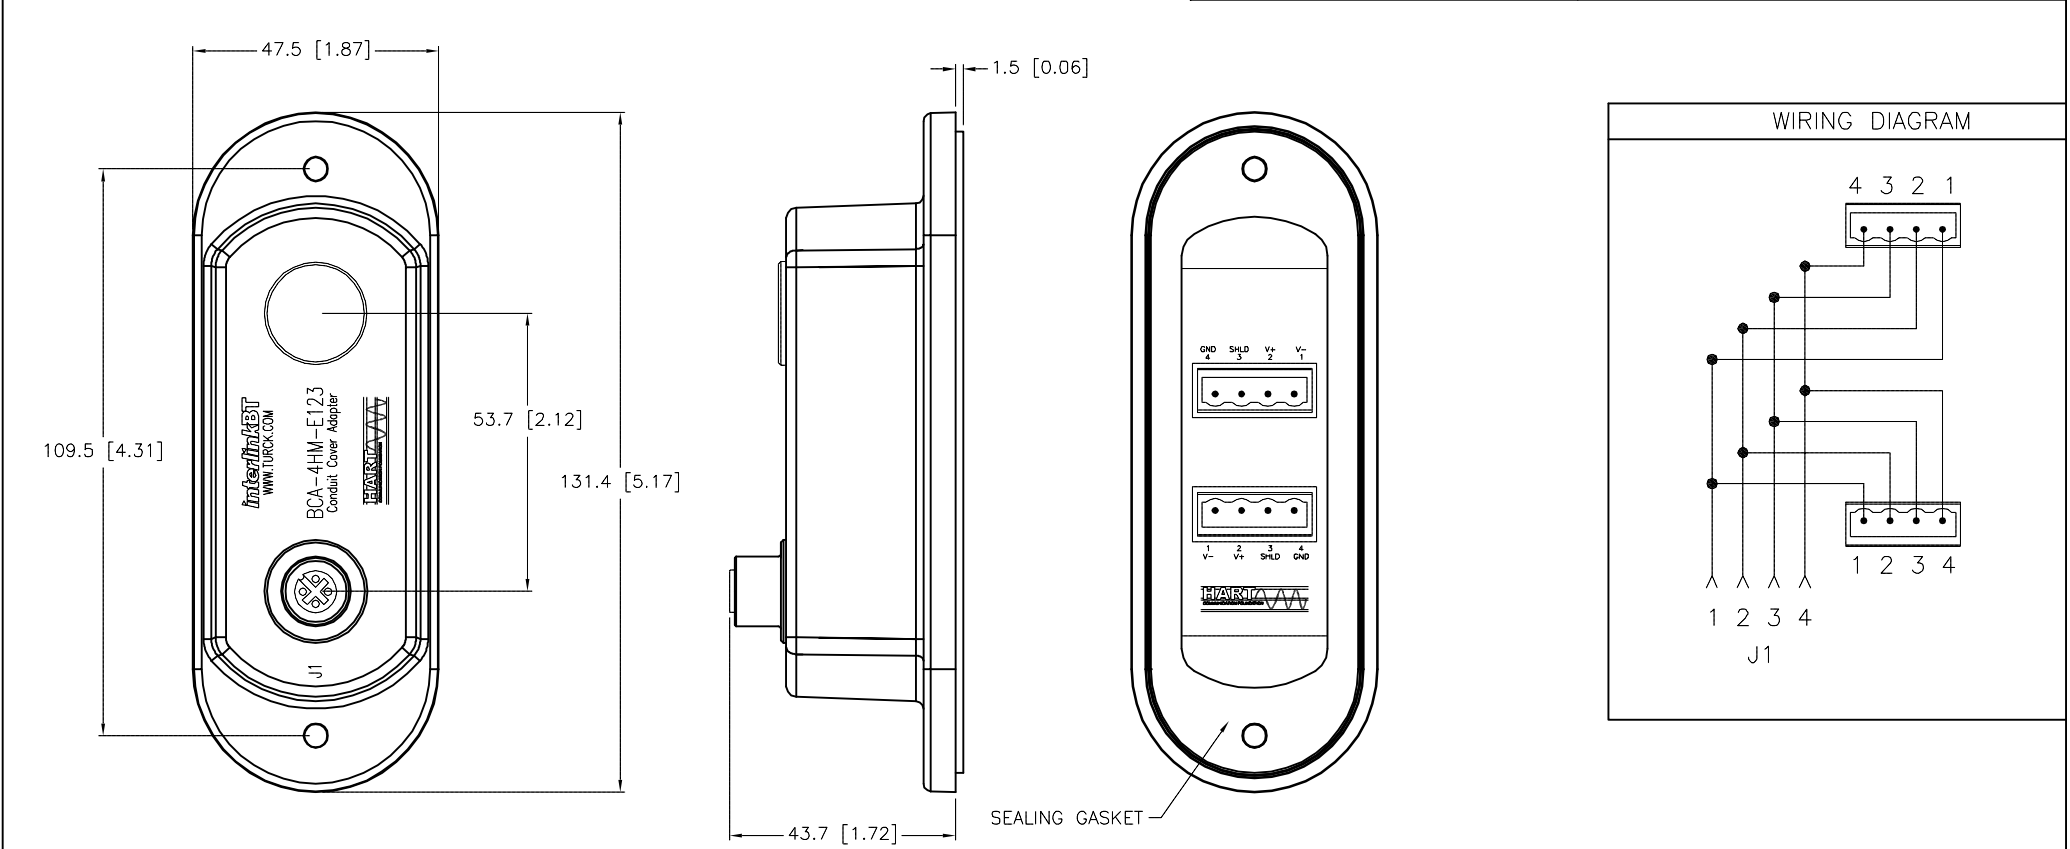

FORM 8 CONDUIT BODIES:
10-24 SCREWS


MARK 9 CONDUIT BODIES:
8-32 SCREWS



TERMINAL BLOCKS INCLUDED

NOTE
PRELIMINARY
SPECIFICATIONS

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1.						
2.			DRFT	RDS	DATE	03/03/04
3.			APVD	DF	SCALE	1=1.5
4.		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		DESCRIPTION BCA-4HM-E123	
MATERIAL			MILLIMETER [INCH]			
FINISH		CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING		IDENTIFICATION NO. U9496-1	
P7 ADD THICKER GASKET					REV P7	
REV	DESCRIPTION	BY	DATE	ECO NO.	FILE: U9496-1	
					SHEET 1 OF 1	