




FEMALE END VIEW	WIRING DIAGRAM	MALE END VIEW	SPECIFICATIONS	
 	J1 P1 1 > → 1 2 > → 2 3 > → 3 4 > → 4 5 > → 5	 	CONTACT CARRIER MATERIAL/COLOR	NYLON/BLACK
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			HOUSING MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	250 V
			TEMPERATURE RANGE	−40°C to +105°C (−40°F to +221°F)
			PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K
			GASKET MATERIAL	NITRILE
			ISOLATOR MATERIAL	NYLON

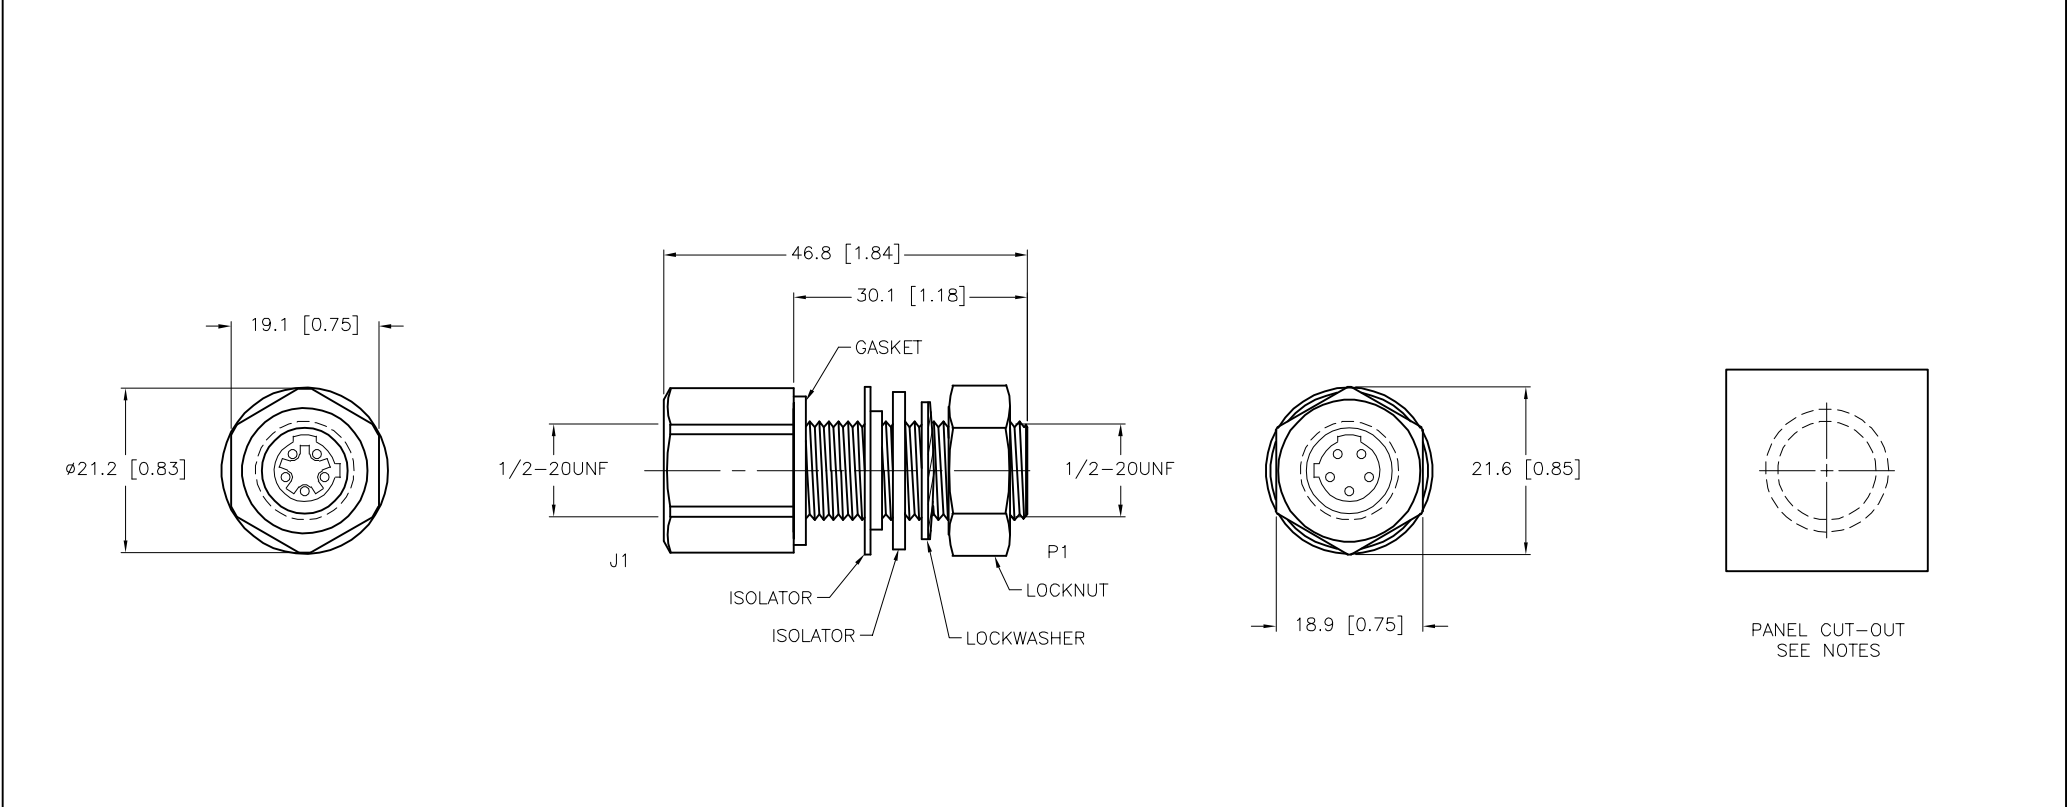


SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- 1. TYPICAL PANEL CUT-OUT USING ISOLATORS IS 0.625 DIA. HOLE.
- 2. TYPICAL PANEL CUT-OUT WITHOUT ISOLATORS IS 0.50 DIA. HOLE.

B	UPDATE PROTECTION CLASS	*CK	06/28/10	31556
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
		DRFT	JB	DATE	05/03/00
		APVD		SCALE	1=1.0
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION FKB FSB 5	
FINISH SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		IDENTIFICATION NO. U9506-51	REV B
				FILE: U9506-51	SHEET 1 OF 1