



MALE END VIEW

FEMALE END VIEW




1 = (+ VOLTAGE)
2 = N/C
3 = (- VOLTAGE)
4 = N/C



1 = (+ VOLTAGE)
2 = N/C
3 = (- VOLTAGE)
4 = N/C



WIRING SCHEMATIC


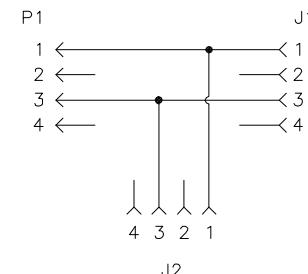


SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/FINISH	316 STAINLESS STEEL/PASSIVATED
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [VDC]	250 V
TEMPERATURE RATING	-40°C TO +55°C (-40°F TO 131°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

CLEARANCE FOR

#8 (M4) FASTENER

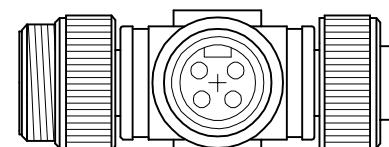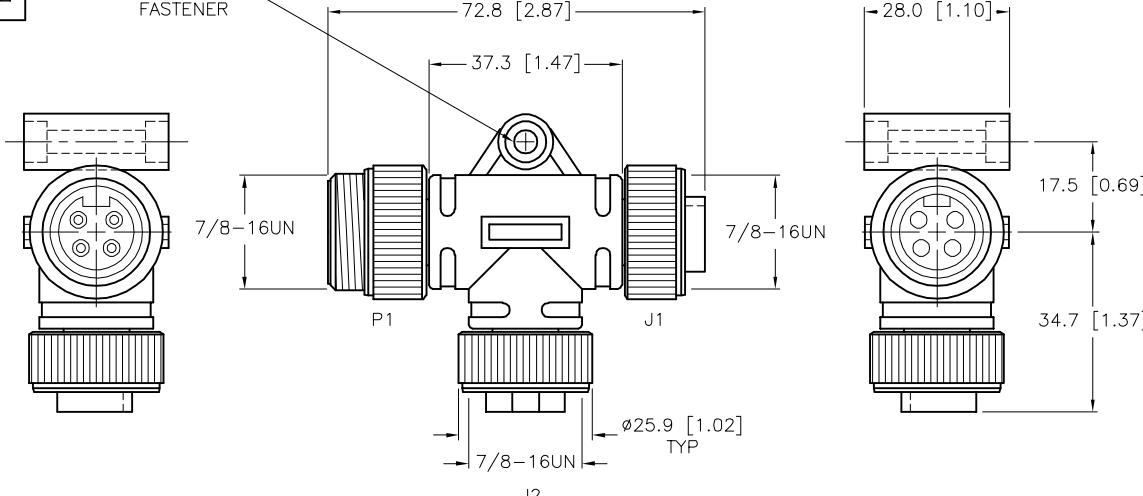

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS

- 1.
- 2.
- 3.
- 4.

3RD ANGLE PROJECTION



THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

MATERIAL

FINISH

ALL DIMENSIONS
DISPLAYED ON THIS
DRAWING ARE FOR
REFERENCE ONLY

DRFT

RDS

DATE 08/09/04

DESCRIPTION

TURCK

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

RSV 2RKV 25

APVD

DF

SCALE 1=1.5

DESCRIPTION

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

FILE: U9684

IDENTIFICATION NO.

U9684

REV

E

E DRAWING PROCESSED AS PART OF ECO 33971

CBM 04/07/11 33971

REV DESCRIPTION

BY DATE ECO NO.

SHEET 1 OF 1