



FEMALE END VIEW







PCB LAYOUT

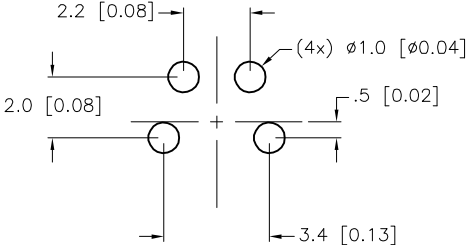

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON OR TPU
HOUSING MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	VITON
RATED CURRENT [A]	2.0 A
RATED VOLTAGE [V]	125 VAC/DC
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)

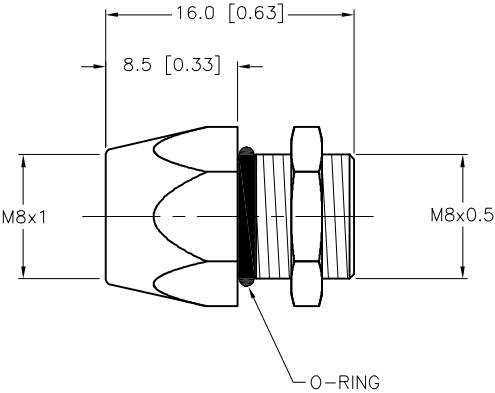

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:


1. "/S1524" DESIGNATES UNPOTTED RECEPTACLE WITH CONTACT CARRIER
PRESSED IN. NO PINS ARE USED.

C	PINS REMOVED FROM CONTACT HOLDER, SEE ECO	RDS	03/30/12	38550
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS

1.
2.
3.
4.

3RD ANGLE PROJECTION



MATERIAL

FINISH

ALL DIMENSIONS
DISPLAYED ON THIS
DRAWING ARE FOR
REFERENCE ONLY

CONTACT TURCK
FOR MORE
INFORMATION

THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

DRFT RWC
APVD

UNIT OF MEASUREMENT
MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

TURCK

DATE 12/23/09
SCALE 1=.5

DESCRIPTION
MFKS 4-PCB/S1524

IDENTIFICATION NO.
U1013

REV
C

FILE: U1013

SHEET 1 OF 1