


I/O Hub for connection of digital signals to IO-Link master

16 Universal Digital Channels, PNP

TBIL-L5-16DXP-AUX

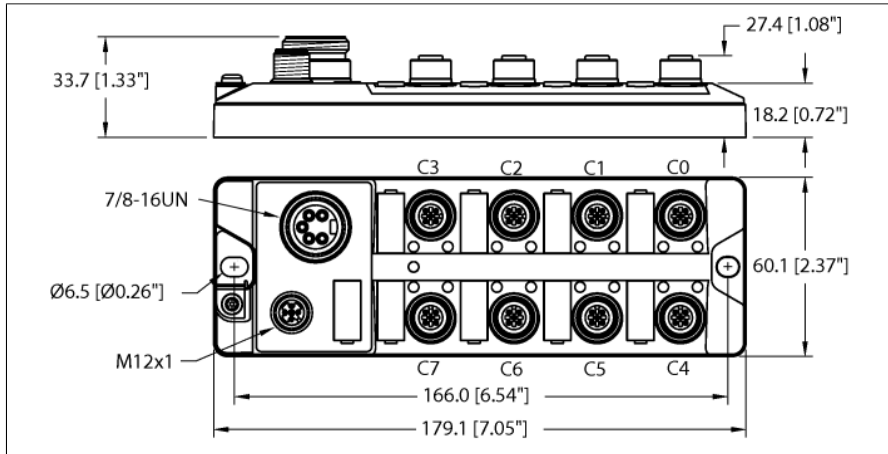


- Glass fiber reinforced housing
- Shock and vibration tested
- Fully potted module electronics
- Protection classes IP65, IP67, IP69K

Type	TBIL-L5-16DXP-AUX
ID	100000882
Supply	
Supply voltage	24
Admissible range	18...30 VDC V1 max 9 A V2 max 9 A V1+V2 max 11 A
Voltage supply connection	7/8", 5-pin
Operating current	120 mA
Sensor/actuator supply	Supply from V1, C0...C3, short-circuit protected, 2.0 A max. per pin.
Sensor/actuator supply	Supply from V2, C4...C7, short-circuit protected, 2.0 A max. per pin.
Electrical isolation	Possible isolation of voltage groups V1, V2 and Viol Voltage proof up 500 VDC
Fault exclusion	Yes, acc. to EN ISO 13849-2, appendix D.2
Digital inputs	
Number of channels	16
Connectivity inputs	M12
Type of input diagnostics	Channel diagnostics
Low-level signal voltage	-3...5 VDC (EN 61131-2, type 1 and 3)
High level signal voltage	11...30 VDC (EN 61131-2, type 1 and 3)
Input delay	0.010 ms
Max. input current	15 mA
Digital outputs	
Number of channels	16
Connectivity outputs	M12
Output type	PNP
Type of output diagnostics	Channel diagnostics
Output current per channel	2.0 A max. per pin. 2.5 A max. per connector.
Output delay	0.35 ms
Load type	resistive, inductive, lamp load
Short-circuit protection	yes
Electrical isolation	500 VDC


IO-Link	
Connectivity IO-Link	1 × M12
IO-Link specification	V 1.1
IO-Link port type	Class A
Frame type	2.6
Transmission rate	COM 2 / 38.4 kbps
Programming	FDT/DTM

Approvals and certificates	
	CE
	UKCA
	UV resistant acc. to DIN EN ISO 4892-2A (2013)
UL Certificate	cULus LISTED 21 W2, Encl.type 1 IND.CONT.EQ.


General Information	
Dimensions (W x L x H)	60.1 x 179.1 x 33.7 mm
Ambient temperature	-40...+60 °C
Storage temperature	-40...+85 °C
Altitude	Max. 5000 m
Protection class	IP65 IP67 IP69K
MTTF	164 years acc. to SN 29500 (Ed. 99) 20 °C
Housing material	PA6-GF30
Housing color	Black
Mounting	2 mounting holes Ø 6.5 mm

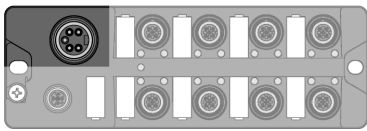

7/8" Aux Power




- 1 = GND (V2)
- 2 = GND (V1)
- 3 = FE
- 4 = 24 VDC (V1)
- 5 = 24 VDC (V2)

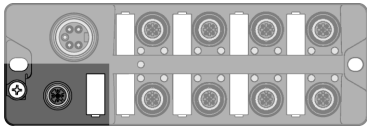


Accessories

Screw next to mounting hole: FE functional ground


M12 IO-Link




- 1 = 24 VDC (V_{IOL})
- 2 = n.c.
- 3 = GND (V_{IOL})
- 4 = C/Q (IO-LINK)
- 5 = n.c.

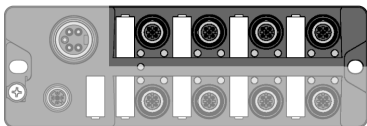


M12 x 1 I/O Port



- 1 = VAUX1 (V1)
- 2 = In/Out (odd)
- 3 = GND (V1)
- 4 = In/Out (even)
- 5 = FE

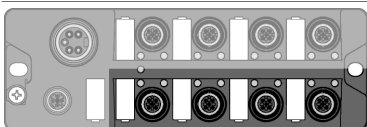

M12 x 1 I/O Port



- 1 = VAUX2 (V2)
- 2 = In/Out (odd)
- 3 = GND (V2)
- 4 = In/Out (even)
- 5 = FE

Module LED status

LED	Color	Status	Description
IO-Link	Green	OFF	Power off
		Flashing	IO-Link communication OK, valid process data is sent or received
	Red	ON	IO-Link communication or module error
		Flashing	IO-Link communication OK, invalid process data or diagnosis enabled, V1 or V2 undervoltage

I/O LED Status


LED	Color	Status	Description
C0 ... C7	Green	ON	Input or output active
0 ... 15	Red	ON	Output active with overload / short circuit
		Flashing	Power overload at the corresponding port. Both port LEDs are flashing.
		OFF	Input or output inactive

C... = slot number, 0...15 = Signal LED (Even = signal pin 4, Odd = signal pin 2)

Process Data

INPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Inputs	0	DI7 C3P2 (B)	DI6 C3P4 (A)	DI5 C2P2 (B)	DI4 C2P4 (A)	DI3 C1P2 (B)	DI2 C1P4 (A)	DI1 C0P2 (B)	DI0 C0P4 (A)
	1	DI15 C7P2 (B)	DI14 C7P4 (A)	DI13 C6P2 (B)	DI12 C6P4 (A)	DI11 C5P2 (B)	DI10 C5P4 (A)	DI9 C4P2 (B)	DI8 C4P4 (A)
Diagnostics	2		Hardware Error						
	3	V2 Aux high	V1 Aux high	V2 high	V1 high	V2 Aux low	V1 Aux low	V2 low	V1 low
	4	Vsens OC C7P1	Vsens OC C6P1	Vsens OC C5P1	Vsens OC C4P1	Vsens OC C3P1	Vsens OC C2P1	Vsens OC C1P1	Vsens OC C0P1
	5	DO7 SC	DO6 SC	DO5 SC	DO4 SC	DO3 SC	DO2 SC	DO1 SC	DO0 SC
	6	DO15 SC	DO14 SC	DO13 SC	DO12 SC	DO11 SC	DO10 SC	DO9 SC	DO8 SC
OUTPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Outputs	0	DO7 C3P2 (B)	DO6 C3P4 (A)	DO5 C2P2 (B)	DO4 C2P4 (A)	DO3 C1P2 (B)	DO2 C1P4 (A)	DO1 C0P2 (B)	DO0 C0P4 (A)
	1	DO15 C7P2 (B)	DO14 C7P4 (A)	DO13 C6P2 (B)	DO12 C6P4 (A)	DO11 C5P2 (B)	DO10 C5P4 (A)	DO9 C4P2 (B)	DO8 C4P4 (A)

Function accessories

Type code	Ident-No.		Dimension drawing
TBEN-S2-4IOL	6814024	Compact multiprotocol I/O module, 4 IO-Link Master 1.1 Class A, 4 universal PNP digital channels 0.5 A	 <p>The drawing shows a top view of the module with dimensions: 12.5 mm width, 12.5 mm height, and 10 mm depth. Pin configurations are labeled: P1-P4 (1-4), P5-P8 (5-8), P9-P12 (9-12), and P13-P16 (13-16). A note '446' is present near the bottom right of the drawing.</p>