



RU10L-M08-UN8X-V1141

Ultrasonic Sensor – Retroreflective Sensor

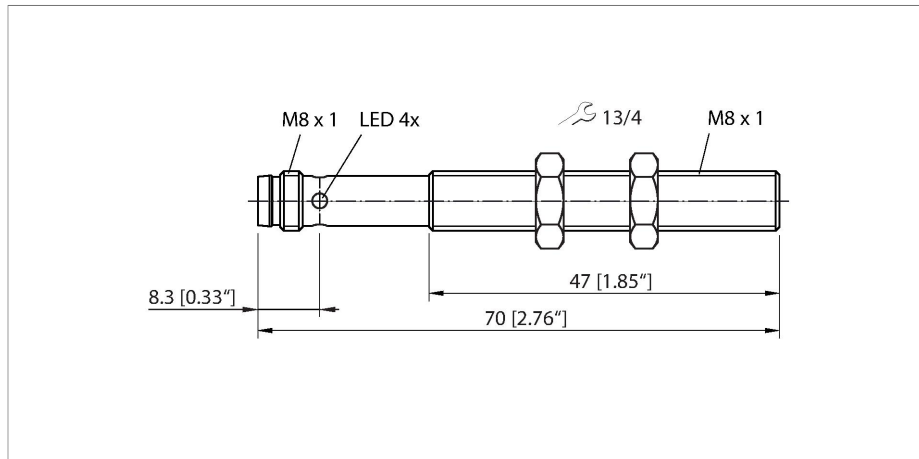


Technical data

Type	RU10L-M08-UN8X-V1141
ID	100003160
Ultrasonic data	
Function	Retroreflective
Range	20...100 mm
Resolution	0.2 mm
Minimum switching range	5 mm
Ultrasound frequency	484 kHz
Temperature drift	≤ 0.2 % of full scale/K
Approach speed	≤ 1 m/s
Pass speed	≤ 1 m/s
Electrical data	
Operating voltage U_B	18...30 VDC
No-load current	≤ 50 mA
Load resistance	≤ 1000 Ω
Residual current	≤ 0.1 mA
Readiness delay	≤ 300 ms
Communication protocol	IO-Link
Output function	NO/NC, NPN
Output 1	Switching output or IO-Link mode
Switching frequency	≤ 20 Hz
Hysteresis	≤ 5 mm
Voltage drop at I_L	≤ 2.5 V

Features

- Smooth sonic transducer face
- Cylindrical housing M08, potted
- Connection via M8 × 1 male connector
- Teach range adjustable via connection cable
- Blind zone: 2 cm
- Range: 10 cm
- Resolution: 0.2 mm
- Aperture angle of sonic cone: ±9 °
- 1 × switching output, NPN
- Teachable settings
- NO/NC programmable
- IO-Link

Wiring diagram

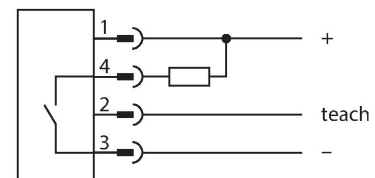

Functional principle


Ultrasonic sensors capture a multitude of objects contactlessly and wear-free with ultrasonic waves. It does not matter whether

Technical data

Short-circuit protection	yes
Reverse polarity protection	yes
Setting option	Remote Teach IO-Link
IO-Link	
IO-Link specification	V 1.1
IO-Link port type	Class A
Communication mode	COM 2 (38.4 kBaud)
Process data width	16 bit
Measured value information	15 bit
Switchpoint information	1 bit
Frame type	2.2
Minimum cycle time	2 ms
Function pin 4	IO-Link
Maximum cable length	20 m
Profile support	Smart Sensor Profile
Included in the SIDI GSDML	Yes
Mechanical data	
Design	Threaded barrel, M08
Dimensions	Ø 8 x 70 mm
Housing material	Metal, CuZn, Nickel Plated
Transducer material	Plastic, Epoxyd resin and PU foam
Electrical connection	Connector, M8 x 1, 4-wire
Ambient temperature	0...+50 °C
Storage temperature	0...+50 °C
Pressure resistance	0.5...5 bar
Protection class	IP67
Switching state	LED, Yellow
Tests/approvals	
MTTF	acc. to SN 29500 (Ed. 99) 40 °C
Declaration of conformity EN ISO/IEC	EN 60947-5-2
Shock test	30 g, 11 ms/10...55 Hz, 1.0 mm shock/ vibration according to EN 60947-5-2
Approvals	CE cULus


the object is transparent or opaque, metallic or non-metallic, firm, liquid or powdery. Even environmental conditions such as spray, dust or rain hardly affect their function. The sonic cone diagram indicates the detection range of the sensor. In accordance with standard EN 60947-5-2, quadratic targets in a range of sizes (20 x 20 mm, 100 x 100 mm) and a round rod with a diameter of 27 mm are used. Important: The detection ranges for other targets may differ from those for standard targets due to the different reflection properties and geometries.

Sonic Cone

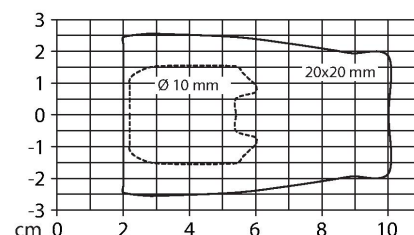

Mounting instructions

Mounting instructions/Description

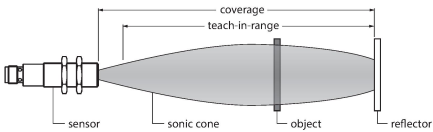

Setting the reflector position
The ultrasonic sensor features a switching output with a teachable switching range. The green and yellow LEDs indicate whether the sensor has detected the object.

A switching range is taught in. This must be within the detection range. In this operating mode, the taught reflector is detected permanently without an object.

Easy-Teach
Connect teach adapter TX1-Q20L60 between the sensor and the connection cable
Position the stationary reflector within the detection range
Press and hold button against Gnd for at least 2 s
• Return to normal operating mode after 17 s or more.


After a successful teach-in, the green LED flashes at 3 Hz and the sensor operates automatically in normal mode.

#LED response
In normal operating mode, the two LEDs indicate the switching state of the sensor.
• Green: Reflector within the detection range
• Yellow: Object between the sensor and the reflector

Accessories


MW08	6945008
------	---------

Mounting bracket for threaded barrel sensors; material: Stainless steel A2 1.4301 (AISI 304)



BSS-08	6901322
--------	---------

Mounting clamp for smooth and threaded barrel sensors; material: Polypropylene



Wiring accessories


Dimension drawing	Type	ID	
-------------------	------	----	--

PKG4M-2/TEL



6625061

Connection cable, M8 female connector, straight, 4-pin, cable length: 2 m, jacket material: PVC, black; cULus approval

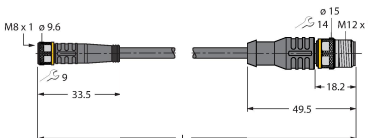

Dimension drawing	Type	ID	
	PKW4M-2/TEL	6625067	Connection cable, M8 female connector, angled, 4-pin, cable length: 2 m, jacket material: PVC, black; cULus approval
	PKG4M-2-RSC4.4T/TXL	6627063	Extension cable, M8 female connector, straight, 4-pin to M12 male connector, straight, 4-pin, cable length: 2 m, jacket material: PUR, black; cULus approval

Accessories

Dimension drawing	Type	ID	
	TBEN-S2-4IOL	6814024	Compact multiprotocol I/O module, 4 IO-Link Master 1.1 Class A, 4 universal PNP digital channels 0.5 A
	USB-2-IOL-0002	6825482	IO-Link Master with integrated USB port