
# PS310-2.5A-04-LI2UPN8-H1141
# Pressure Sensor – Absolute Pressure: 0…2.5 Bar



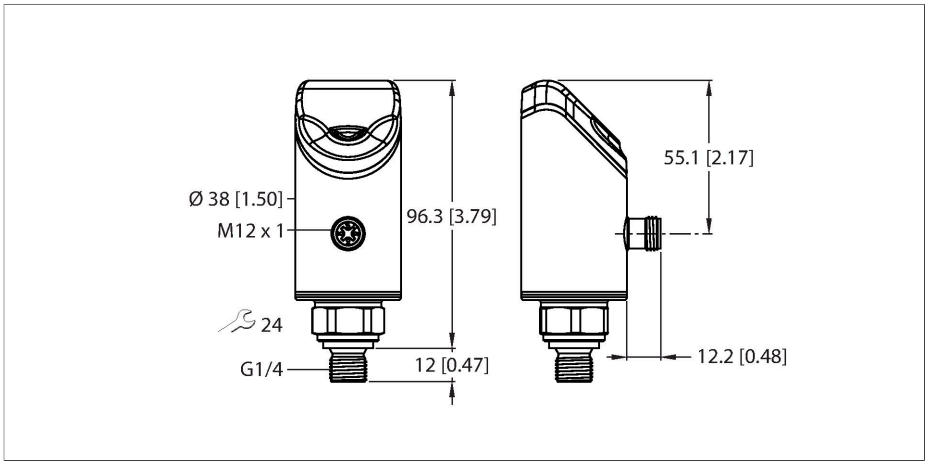



## Technical data


| | |
|---|---|
| Type | PS310-2.5A-04-LI2UPN8-H1141 |
| ID | 100003723 |
| Medium temperature | -40…+90 °C |
| **Pressure range** | |
| Pressure type | Absolute pressure |
| Pressure range | 0…2.5 bar |
| | 0…36.26 psi |
| | 0…0.25 MPa |
| Admissible overpressure | ≤ 12 bar |
| Burst pressure | ≥ 12 bar |
| Response time | ≤ 3 ms |
| Operating voltage $U_B$ | 18…33 VDC |
| Short-circuit/reverse polarity protection | yes, cyclic / yes (voltage supply) |
| Insulation class | III |
| **Outputs** | |
| Output 1 | Switching output or IO-Link mode |
| Output 2 | Analog or switching output |
| **Switching output** | |
| Communication protocol | IO-Link |
| Output function | NO/NC, PNP/NPN |
| Accuracy | ± 0.5 % FS BSL |
| Rated operational current | 0.25 A |
| Switching frequency | ≤ 300 Hz |
| Switching point distance | ≥ 0.5 % |

## Features

- 4-digit, 2-color (red/green), 12-segment display, rotatable by 180°
- Housing is rotatable after mounting the process connection
- Ceramic measuring cell
- 18…33 VDC
- NO/NC contact, PNP/NPN output, analog output (current/voltage), IO-Link
- Process connection G1/4" male thread
- Plug-in device, M12 × 1

## Wiring diagram

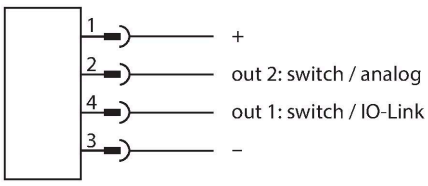


## Functional principle

The pressure transmitters from the PS310 product series operate with ceramic measuring cells. As a result of the pressure acting on the ceramic substrate, a signal that is proportional to the pressure is generated and processed electronically. The processed

PS310-2.5A-04-LI2UPN8-H1141| 03/25/2026 21-33 | technical changes reserved

## Technical data

| | |
|---|---|
| Switch point: | (Min. + 0.005 × range)…100 % of full scale |
| Release point(s) | min. up to (SP - 0.005 × range) |
| Switching cycles | ≥ 100 mil. |
| **Analog output** | |
| Current output | 4…20 mA |
| Voltage output | 0…10 V |
| Accuracy LHR | ± 0.5 % FS BSL |
| **IO-Link** | |
| IO-Link specification | V 1.1 |
| Transmission physics | corresponds to 3-wire physics (PHY2) |
| Transmission rate | COM 2/38.4 kbps |
| Process data width | 16 bit |
| Measured value information | 14 bit |
| Switching point information | 2 bit |
| Frame type | 2.2 |
| Programming | FDT/DTM |
| Accuracy | ± 0.5 % FS BSL |
| Included in the SIDI GSDML | Yes |
| **Programming** | |
| Programming options | start/end value analog output; switch/ release points; PNP/NPN; NO/NC contact; hysteresis/window function; damping; pressure unit; peak pressure memory |
| **Mechanical data** | |
| Housing material | Stainless-steel/Plastic, 1.4404 (AISI 316L)/Grilamid TR90 UV/Elastollan C 65 A 15 HPM 000/Ultramid A3X2G5 |
| Process connection | G 1/4" male thread |
| Wrench size pressure connection / coupling nut | 24 |
| Max. tightening torque of housing nut | 35 Nm |
| Electrical connection | Connector, M12 × 1 |
| Protection class | IP66<br>IP67<br>IP69K |
| **Environmental conditions** | |
| Ambient temperature | -40…+80 °C |
| Storage temperature | -40…+80 °C |
| Shock resistance | 50 |
| EMV | EN 61000-4-2 ESD:4 kV CD / 8 kV AD |

signal is available either as a switching or an analog output with an accuracy of 0.5 % of full scale. The rotatable sensor body and a variety of process connections guarantee flexible process integration.

PS310-2.5A-04-LI2UPN8-H1141| 03/25/2026 21-33 | technical changes reserved

## Technical data

| | |
|---|---|
| | EN 61000-4-3 HF radiated: 15 V/m<br>EN 61000-4-4 Burst: 2 kV<br>EN 61000-4-6 HF cable bound: 10 V<br>EN 61000-6-2 0.5 kV, 42 Ω<br>EN 61326-2-3 |
| **Tests/approvals** | |
| UL registration number | E183243 |
| **Reference conditions acc. to IEC 61298-1** | |
| Temperature | 15…+25 °C |
| Atmospheric pressure | 860…1030 hPa abs. |
| Humidity | 45…75 % rel. |
| Auxiliary power | 24 VDC |
| **Displays/Operating elements** | |
| Display | 4-digit 12-segment display, rotatable by 180°, red or green |
| Switching state | 2 × LEDs, Yellow |
| Unit display | 5 x LEDs green (bar, psi, kPa, MPa, misc) |
| **Temperature behaviour** | |
| Temperature coefficient range $TK_s$ | ± 0.15 % of full scale/10 K |
| Temperature coefficient zero point $TK_0$ | ± 0.15 % of full scale/10 K |
| MTTF | 98 years acc. to SN 29500 (Ed. 99) 40 °C |
| Included in delivery | NBR70 flat seal (USIT ring, nitrile rubber), 1 pc. |

## Technical data

| | |
|---|---|
| Type | PS310-2.5A-04-LI2UPN8-H1141 |
| ID | 100003723 |
| **Pressure range** | |
| Pressure type | Absolute pressure |
| Pressure range | 0…2.5 bar |
| | 0…36.26 psi |
| | 0…0.25 MPa |
| Admissible overpressure | ≤ 12 bar |
| Burst pressure | ≥ 12 bar |
| Response time | ≤ 3 ms |
| Operating voltage $U_B$ | 18…33 VDC |
| Voltage drop at $I_e$ | ≤ 2 V |
| Short-circuit/reverse polarity protection | yes, cyclic / yes (voltage supply) |
| Protection class | IP66 |

PS310-2.5A-04-LI2UPN8-H1141| 03/25/2026 21-33 | technical changes reserved

## Technical data

| | IP67<br>IP69K |
|---|---|
| Insulation class | III |
| **Outputs** | |
| Output 1 | Switching output or IO-Link mode |
| Output 2 | Analog or switching output |
| **Switching output** | |
| Communication protocol | IO-Link |
| Output function | NO/NC, PNP/NPN |
| Accuracy | ± 0.5 % FS BSL |
| Rated operational current | 0.25 A |
| Switching frequency | ≤ 300 Hz |
| Switching point distance | ≥ 0.5 % |
| Switch point: | (Min. + 0.005 × range)…100 % of full scale |
| Release point(s) | min. up to (SP - 0.005 × range) |
| Switching cycles | ≥ 100 mil. |
| **Analog output** | |
| Current output | 4…20 mA |
| Voltage output | 0…10 V |
| Accuracy LHR | ± 0.5 % FS BSL |
| **IO-Link** | |
| IO-Link specification | V 1.1 |
| Programming | FDT/DTM |
| Transmission physics | corresponds to 3-wire physics (PHY2) |
| Transmission rate | COM 2/38.4 kbps |
| Process data width | 16 bit |
| Measured value information | 14 bit |
| Switchpoint information | 2 bit |
| Frame type | 2.2 |
| Accuracy | ± 0.5 % FS BSL |
| Included in the SIDI GSDML | Yes |
| **Temperature behaviour** | |
| Medium temperature | -40…+90 °C |
| Temperature coefficient zero point $TK_0$ | ± 0.15 % of full scale/10 K |
| Temperature coefficient range $TK_s$ | ± 0.15 % of full scale/10 K |
| **Environmental conditions** | |
| Ambient temperature | -40…+80 °C |
| Storage temperature | -40…+80 °C |

PS310-2.5A-04-LI2UPN8-H1141| 03/25/2026 21-33 | technical changes reserved

## Technical data

| | |
|---|---|
| Shock resistance | 50 |
| EMV | EN 61000-4-2 ESD:4 kV CD / 8 kV AD<br>EN 61000-4-3 HF radiated: 15 V/m<br>EN 61000-4-4 Burst: 2 kV<br>EN 61000-4-6 HF cable bound: 10 V<br>EN 61000-6-2 0.5 kV, 42 Ω<br>EN 61326-2-3 |
| **Mechanical data** | |
| Housing material | Stainless-steel/Plastic, 1.4404 (AISI 316L)/Grilamid TR90 UV/Elastollan C 65 A 15 HPM 000/Ultramid A3X2G5 |
| Process connection | G 1/4" male thread |
| Wrench size pressure connection / coupling nut | 24 |
| Electrical connection | Connector, M12 × 1 |
| Max. tightening torque of housing nut | 35 Nm |
| **Reference conditions acc. to IEC 61298-1** | |
| Temperature | 15…+25 °C |
| Atmospheric pressure | 860…1030 hPa abs. |
| Humidity | 45…75 % rel. |
| Auxiliary power | 24 VDC |
| **Displays/Operating elements** | |
| Display | 4-digit 12-segment display, rotatable by 180°, red or green |
| Switching state | 2 × LEDs, Yellow |
| Unit display | 5 x LEDs green (bar, psi, kPa, MPa, misc) |
| **Programming** | |
| Programming options | start/end value analog output; switch/release points; PNP/NPN; NO/NC contact; hysteresis/window function; damping; pressure unit; peak pressure memory |
| **Tests/approvals** | |
| Approvals | cULus |
| UL registration number | E183243 |
| MTTF | 98 years acc. to SN 29500 (Ed. 99) 40 °C |
| Included in delivery | NBR70 flat seal (USIT ring, nitrile rubber), 1 pc. |

PS310-2.5A-04-LI2UPN8-H1141| 03/25/2026 21-33 | technical changes reserved