


Accessories Welding Sleeve with Collar For NCLS Capacitive Limit Level Sensors NCLS-WA7

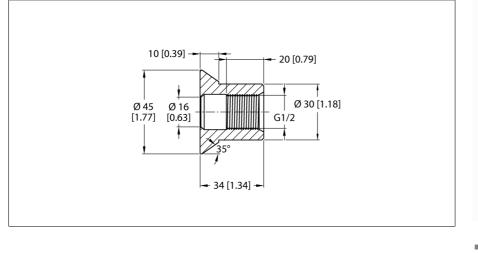

	Welding	sleeve	for	thick-walled	containers
--	---------	--------	-----	--------------	------------

- ensors

Туре	NCLS-WA7	HPC sleeve no. 4	
ID	100004433	Suitable for NCLS limit level sensors	
Mounting location	any		
Installation information	-		
······································		Functional principle	
Process Pressure	10 bar		
Medium temperature	0+140 °C	The welding concept for limit level sensors from the NCLS product series allows pro-	
CIP/SIP-capable	yes		
		cess adapters to be freely positioned without threads in a flow channel or tank.	
Tests/approvals		threads in a now channel of tank.	
Warning	Protect against mechanical damage	The welding adapter is welded on to the cor-	
		responding exterior wall of the stainless steel	
Mechanical data		tank or pipe. The sensor is then fixed directly	
Design	Accessories for threaded barrels	into the adapter (or the welding sleeve).	
Dimensions	34 x 45 x 45 mm	The screw-in adapters are available in all	
Housing material	Stainless steel, 1.4404 (AISI 316L)	standard industrial shapes and sizes. The system consisting of the sensor and welding adapter can therefore be adjusted easily to a	
Materials (contact with media)	Stainless steel 1.4404 (AISI 316L)		
Process connection	Welded installation		
Protection class	IP67	wide range of application requirements.	
	When installed		