


# RES-193B10E-IOL14B-H1141

## Absolute Rotary Encoder - Singleturn – IO-Link


### Industrial Line

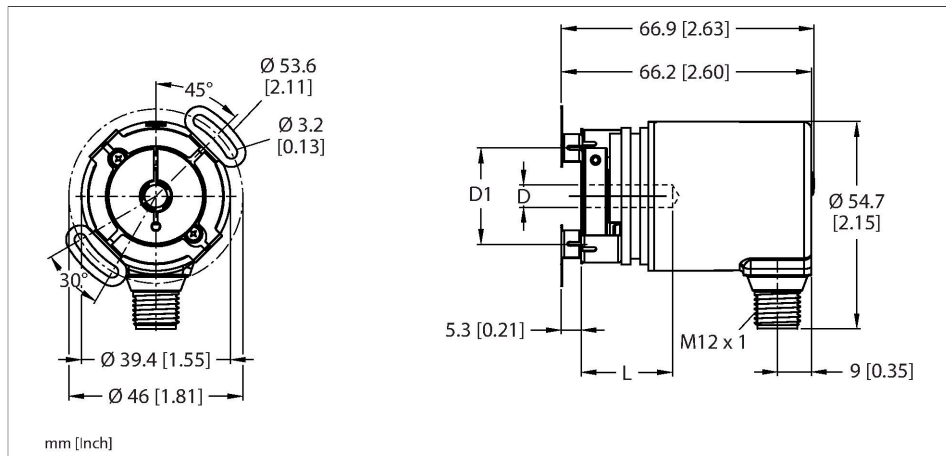

### Features

- Flange with slotted flex mount, Ø 46 mm
- Hollow shaft, Ø 10mm
- Optical measuring principle
- Shaft material, stainless steel
- IP67 rated on the shaft side
- -40...+85 °C
- Max. 4000 rev/min
- 10-30 VDC
- SSI (Binary Code)
- M12 connection, 8-pin
- 360° resolved in 14 bit (16384 positions)

### Wiring diagram

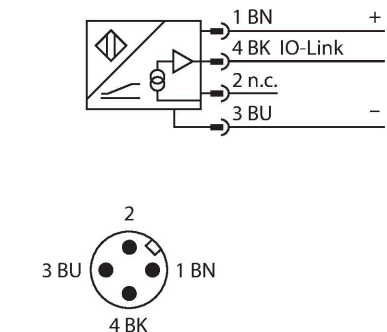

### Technical data

Type	RES-193B10E-IOL14B-H1141
ID	100020152
Measuring principle	Magnetic
<b>General data</b>	
Max. rotational speed	4000 rpm
Starting torque	< 0.01 Nm
Measuring range	0...360 °
Repetition accuracy	± 0.2 ° At 25 °C
Absolute accuracy	± 1 ° At 25 °C
Output type	Absolute singleturn
Resolution singleturn	14 Bit
<b>Electrical data</b>	
Operating voltage $U_B$	18...30 VDC
No-load current	≤ 30 mA
Short-circuit protection	yes
Wire break/reverse polarity protection	yes
Communication protocol	IO-Link
IO-Link specification	V 1.1
Programming	FDT/DTM
<b>Mechanical data</b>	
Flange type	Flange with stator coupling
Flange diameter	Ø 46 mm
Shaft Type	Blind hole shaft

## Technical data

Shaft diameter D (mm)	10
Shaft Length L [mm]	18.5
Outer diameter of compression fitting D1	25.5 mm
Shaft material	Stainless steel
Housing material	Die-cast zinc
Electrical connection	Connector, M12 × 1
Axial shaft load	20 N
Radial shaft load	40 N
<b>Environmental conditions</b>	
Ambient temperature	-40...+85 °C
Vibration resistance (EN 60068-2-6)	300 m/s <sup>2</sup> , 10...2000 Hz
Shock resistance (EN 60068-2-27)	30 g (300 m/s <sup>2</sup> ), 10...2000 Hz
Protection class	IP67
Protection class shaft	IP67