
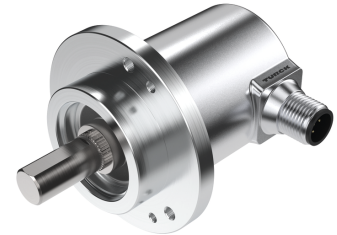


REM-E-195T10C-IOL32B-H1141

Absolute Rotary Encoder - Multiturn – IO-Link Efficiency Line

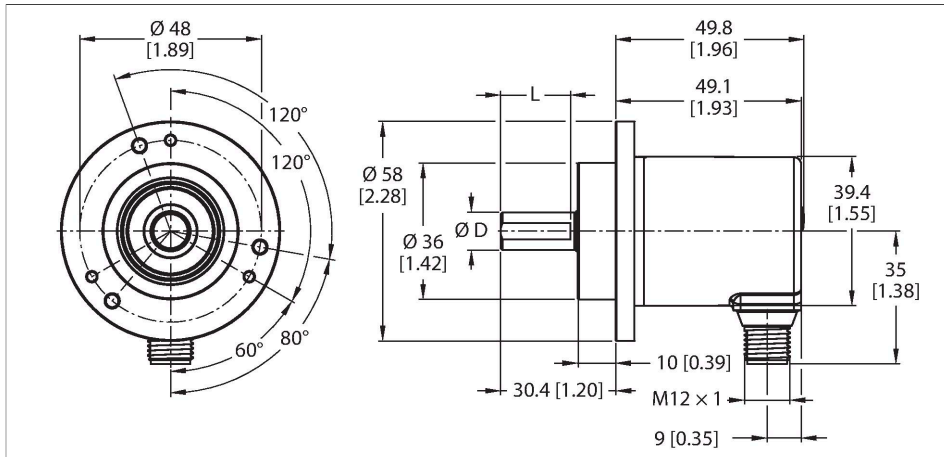


Technical data

Type	REM-E-195T10C-IOL32B-H1141
ID	100021186
Measuring principle	Magnetic
General data	
Max. rotational speed	4000 rpm
Repetition accuracy	$\pm 0.2^\circ$
Absolute accuracy	$\pm 0.5^\circ$
Output type	Absolute multiturn
Electrical data	
Operating voltage U_B	18...30 VDC
No-load current	≤ 40 mA
Short-circuit protection	yes
Wire break/reverse polarity protection	yes
Communication protocol	IO-Link
IO-Link	
IO-Link specification	V 1.1
Programming	FDT/DTM
Mechanical data	
Flange type	Clamping flange
Flange diameter	$\varnothing 58$ mm
Shaft Type	Solid shaft
Shaft diameter D (mm)	10
Shaft Length L [mm]	20

Features

- $\varnothing 58$ mm clamping flange
- Solid shaft, $\varnothing 10$ mm x 20mm
- Optical measuring principle
- Shaft material, stainless steel
- Protection class IP64 on housing and shaft side
- -20...+70 °C
- Max. 4000 rpm (continuous operation 2000 rpm)
- Energy harvesting technology
- 18...30 VDC
- M12 x 1 male connection, 4-pin
- Singleturn resolution 14 bit scalable, default 14 bit
- Multiturn resolution scalable only to 18 bits over total resolution, default 18 bits
- Total resolution 32 bit scalable, default 32 bit

Wiring diagram

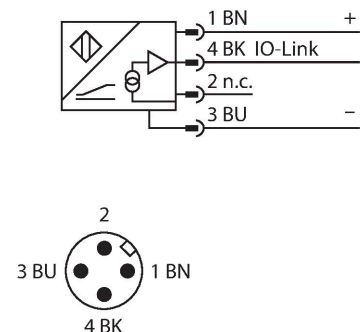

Technical data

Shaft material	Stainless steel
Housing material	Die-cast zinc
Electrical connection	Connector, M12 × 1
	5-pin
Axial shaft load	40 N
Radial shaft load	80 N
Environmental conditions	
Ambient temperature	-20...+70 °C
Vibration resistance (EN 60068-2-6)	30 g (300 m/s ²), 10...2000 Hz
Shock resistance (EN 60068-2-27)	500 g (2500 m/s ²), 4 ms
Protection class	IP64
Protection class shaft	IP64
MTTF	25 years

Accessories

<p>RA-BC-20-06-10 100048779</p> <p>Bellows coupling with aluminum hub Ø 20 mm; d1 = 6 mm, d2 = 10 mm</p> <p>2 mm 1.5 Nm</p>	<p>RA-BC-20-08-10 100048781</p> <p>Bellows coupling with aluminum hub Ø 20 mm; d1 = 8 mm, d2 = 10 mm</p> <p>2 mm 1.5 Nm</p>
<p>RA-BC-20-10-10 100048782</p> <p>Bellows coupling with aluminum hub Ø 20 mm; d1 = 10 mm, d2 = 10 mm</p> <p>2 mm 1.5 Nm</p>	<p>RA-BC-20-10-12 100048783</p> <p>Bellows coupling with aluminum hub Ø 20 mm; d1 = 10 mm, d2 = 12 mm</p> <p>2 mm 1.5 Nm</p>
<p>RA-BC-E-20-06-10 100048786</p> <p>Stainless steel bellows coupling Ø 20 mm; d1 = 6 mm, d2 = 10 mm</p> <p>2 mm 0.7 Nm</p>	<p>RA-BC-E-20-10-10 100048787</p> <p>Stainless steel bellows coupling Ø 20 mm; d1 = 10 mm, d2 = 10 mm</p> <p>2 mm 0.7 Nm</p>
<p>RA-BC-E-20-10-12 100048788</p> <p>Stainless steel bellows coupling Ø 20 mm; d1 = 10 mm, d2 = 12 mm</p> <p>2 mm 0.7 Nm</p>	<p>RA-SDC-30-10-10 100048792</p> <p>Spring disc coupling Ø 30 mm; d1 = 10 mm, d2 = 10 mm</p> <p>2.5 mm 1.2 Nm</p>
<p>RA-SDC-30-10-12 100048793</p> <p>Spring disc coupling Ø 30 mm; d1 = 10 mm, d2 = 12 mm</p> <p>2.5 mm 1.2 Nm</p>	<p>RA-HC-25-10-10 100048796</p> <p>Aluminum helix coupling Ø 25 mm; d1 = 10 mm, d2 = 10 mm</p> <p>2 mm 1.2 Nm</p>

RA-HC-25-10-12

100048797

Aluminum helix coupling \varnothing 25 mm; d1 = 10 mm, d2 = 12 mm

