



# RJ45 RJ45 440-36M/C1246

## Industrial Ethernet Cable – Extension Cable

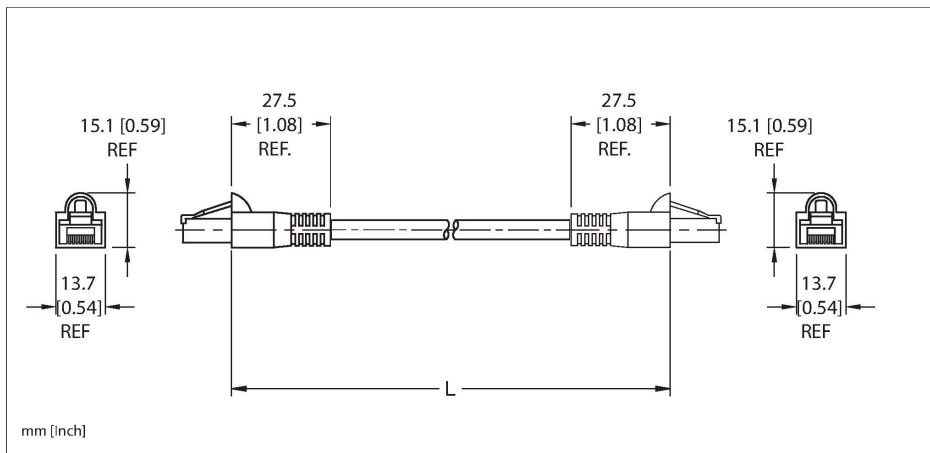

### Technische Daten


|                                 |                           |
|---------------------------------|---------------------------|
| Type                            | RJ45 RJ45 440-36M/C1246   |
| ID                              | 100021788                 |
| Connector A                     | Male, RJ45, Straight      |
| Number of contacts              | 8                         |
| Contacts                        | Bronze, CuSn, Gold-plated |
| Contact carriers                | Plastic, PC, Transparent  |
| Connector body                  | Plastic, TPU, Black       |
| Protection class (When coupled) | IP20                      |
|                                 | NEMA: 1                   |
| Connector B                     | Male, RJ45, Straight      |
| Number of contacts              | 8                         |
| Contacts                        | Bronze, CuSn, Gold-plated |
| Contact carriers                | Plastic, PC, Transparent  |
| Connector body                  | Plastic, TPU, Black       |
| Pollution degree                | 2                         |
| Protection class (When coupled) | IP20                      |
|                                 | NEMA: 1                   |
| Cable data                      |                           |
| Cable ID                        | RF51210                   |
| Fieldbus                        | Ethernet, 440             |
| Total number of conductors      | 4                         |
| Cable diameter                  | Ø 6.1 mm                  |
| Length (L)                      | 36 m                      |
| Cable jacket                    | TPE, Teal                 |

### Features



- RJ45, Male, Straight, 8-pin
- RJ45, Male, Straight, 8-pin
- Unshielded Twisted Pair
- Industrial Ethernet Cable
- fieldbus type: Ethernet CAT5E, TPE jacket, Teal, 2UTPX24 AWG
- -40 Cold Bend Rating
- Flame Ratings: UL 1685, UL1061
- Flexlife® and C-Track Approved

### Cable cross section

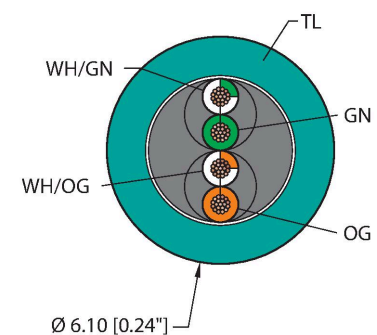

### Contact assignment

## Technische Daten

|                                                                                                                                                                                                                                                                               |                                                                                      |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Conductor material                                                                                                                                                                                                                                                            | TC (tinned copper)                                                                   |
| Conductor colors                                                                                                                                                                                                                                                              | WH/GN, GN, WH/OG, OG                                                                 |
| Description of assembly                                                                                                                                                                                                                                                       | UTP (Unshielded Twisted Pair)                                                        |
| Number of pairs                                                                                                                                                                                                                                                               | 2                                                                                    |
| Conductor diameter                                                                                                                                                                                                                                                            | 0.042 "                                                                              |
| Conductor insulation material                                                                                                                                                                                                                                                 | HDPE                                                                                 |
| Cable conductor cross-section                                                                                                                                                                                                                                                 | 2x24 AWG [Similar to 0.25 mm²]                                                       |
| Number of strands x O.D.                                                                                                                                                                                                                                                      | 7x32 AWG                                                                             |
| <b>Electrical properties at +20 °C</b>                                                                                                                                                                                                                                        |                                                                                      |
| Rated voltage                                                                                                                                                                                                                                                                 | 42 V                                                                                 |
| Current                                                                                                                                                                                                                                                                       | 1.5 A                                                                                |
| <b>Mechanical and chemical properties</b>                                                                                                                                                                                                                                     |                                                                                      |
| Bending radius (static)                                                                                                                                                                                                                                                       | ≥ 4 x Ø                                                                              |
| Bending radius (dynamic)                                                                                                                                                                                                                                                      | ≥ 10 x Ø                                                                             |
| Bending radius (C-track)                                                                                                                                                                                                                                                      | ≥ 4 In.                                                                              |
| Bending cycles (C-track)                                                                                                                                                                                                                                                      | 35 Million *                                                                         |
| Torsional stress                                                                                                                                                                                                                                                              | ± 270 °/m                                                                            |
| Torsion rating                                                                                                                                                                                                                                                                | Max. 3 million                                                                       |
| Torsional stress                                                                                                                                                                                                                                                              | 52 Cycles/min                                                                        |
| UL cold bend rating                                                                                                                                                                                                                                                           | -40 °C                                                                               |
|                                                                                                                                                                                                                                                                               | *When properly installed @ 20°C, 50%RH, and a cycle speed of ≤0.5 cycles per second. |
| C-Track                                                                                                                                                                                                                                                                       | Yes                                                                                  |
| Ambient temperature range (static)                                                                                                                                                                                                                                            | -40...+80 °C                                                                         |
| Ambient temperature range (dynamic)                                                                                                                                                                                                                                           | 5...+80 °C                                                                           |
| Temperature range (installation)                                                                                                                                                                                                                                              | -10...+80 °C                                                                         |
| <b>Approval</b>                                                                                                                                                                                                                                                               |                                                                                      |
| Approvals                                                                                                                                                                                                                                                                     | CE<br>UKCA<br>RoHS                                                                   |
| <b>Note</b>                                                                                                                                                                                                                                                                   |                                                                                      |
| <p>- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.</p> <p>- We reserve the right to make technical alterations without prior notice.</p> |                                                                                      |

Connector A



Connector B



## Circuit Diagram

