



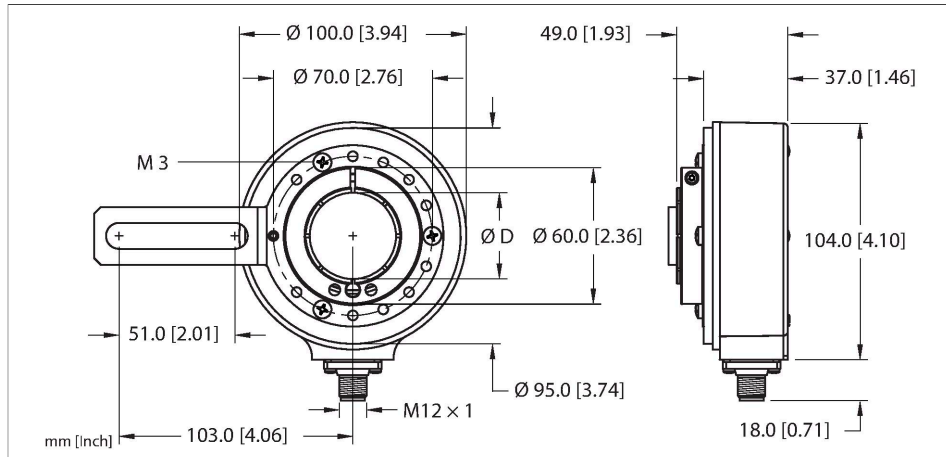

1	GND
2	U_B +
3	A
4	A inv.
5	B
6	B inv.
7	0
8	0 inv.
PH	shield



Technical data


Shaft Type	Blind hole shaft
Shaft diameter D (mm)	31.75
Shaft diameter D	1.25 in
Shaft material	Stainless steel
Housing material	Die-cast zinc
Electrical connection	Connector, M12 × 1
	8-pin
Axial shaft load	100 N
Radial shaft load	200 N
Environmental conditions	
Ambient temperature	-40...+80 °C
Vibration resistance (EN 60068-2-6)	10 g (100 m/s ²), 10...2000 Hz
Shock resistance (EN 60068-2-27)	200 g (1000 m/s ²), 6 ms
Protection class	IP65
Protection class shaft	IP65
Included in delivery	Mounting arm, long

Accessories

RA-43-S4

1545911


Stainless steel long anti-rotation spring 110 mm reference diameter



RA-43-E2

1545912


Stainless steel 4 1/2" C-face tether 149 mm reference diameter



RA-43-S5

1545910

Stainless steel short anti-rotation spring 76 mm reference diameter



RA-43-S8

1545909

Stainless steel long tether arm 104 - 206 mm reference diameter

