


REM-E-121T10S-9F32B-H1151

Absolute Rotary Encoder - Multiturn

Efficiency Line

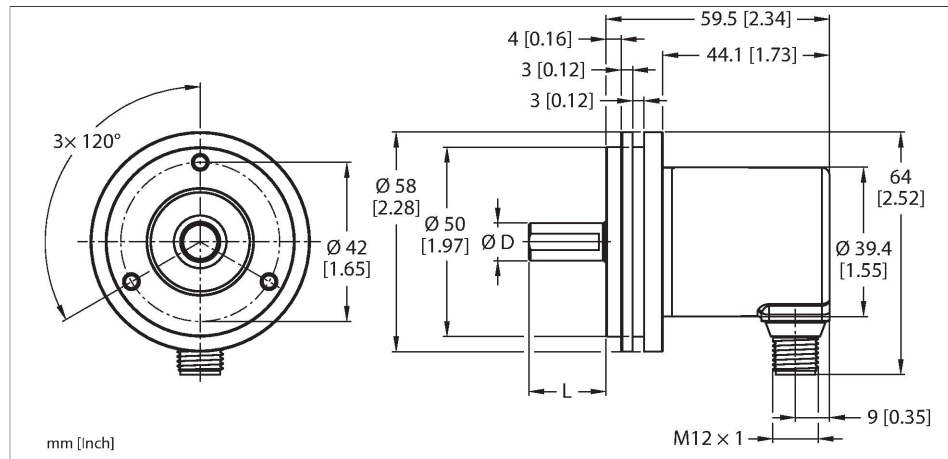



Features

- Ø 58 mm servo flange
- Solid shaft, Ø 10mm x 20mm
- Optical measuring principle
- Shaft material, stainless steel
- Protection class IP64 on housing and shaft side
- -20...+70 °C
- Max. 4000 rpm (continuous operation 2000 rpm)
- Energy harvesting technology
- 10-30 VDC
- SAE J1939
- M12 connection, 5-pin
- Singleturn resolution 14 bit scalable, default 14 bit
- Multiturn resolution scalable up to 29 bit over total resolution, default 18 bit
- Total resolution 32 bit scalable, default: 32 bit

Technical data

Type	REM-E-121T10S-9F32B-H1151
ID	100023366
Measuring principle	Magnetic
General data	
Max. rotational speed	4000 rpm
Repetition accuracy	± 0.2 ° At 25 °C
Absolute accuracy	± 1 ° At 25 °C
Output type	Absolute multiturn
Electrical data	
Operating voltage U _B	10...30 VDC
No-load current	≤ 80 mA
Short-circuit protection	yes
Wire break/reverse polarity protection	yes
Communication protocol	SAE J1939
Interface	SAE J1939
Mechanical data	
Flange type	Synchro flange
Flange diameter	Ø 58 mm
Shaft Type	Solid shaft
Shaft diameter D (mm)	10
Shaft Length L [mm]	20
Shaft material	Stainless Steel
Housing material	Die-cast zinc

Wiring diagram



Technical data

Electrical connection	Connector, M12 × 1
	M12, 5-pole
Axial shaft load	40 N
Radial shaft load	80 N
Environmental conditions	
Ambient temperature	-20...+70 °C
Vibration resistance (EN 60068-2-6)	30 g (300 m/s²), 10...2000 Hz
Shock resistance (EN 60068-2-27)	500 g (2500 m/s²), 4 ms
Protection class	IP64
Protection class shaft	IP64


Accessories

RA-BC-20-06-10	100048779	Bellows coupling with aluminum hub Ø 20 mm; d1 = 6 mm, d2 = 10 mm
RA-BC-20-08-10	100048781	Bellows coupling with aluminum hub Ø 20 mm; d1 = 8 mm, d2 = 10 mm
RA-BC-20-10-10	100048782	Bellows coupling with aluminum hub Ø 20 mm; d1 = 10 mm, d2 = 10 mm
RA-BC-20-10-12	100048783	Bellows coupling with aluminum hub Ø 20 mm; d1 = 10 mm, d2 = 12 mm
RA-BC-E-20-06-10	100048786	Stainless steel bellows coupling Ø 20 mm; d1 = 6 mm, d2 = 10 mm
RA-BC-E-20-10-10	100048787	Stainless steel bellows coupling Ø 20 mm; d1 = 10 mm, d2 = 10 mm
RA-BC-E-20-10-12	100048788	Stainless steel bellows coupling Ø 20 mm; d1 = 10 mm, d2 = 12 mm
RA-SDC-30-10-10	100048792	Spring disc coupling Ø 30 mm; d1 = 10 mm, d2 = 10 mm
RA-SDC-30-10-12	100048793	Spring disc coupling Ø 30 mm; d1 = 10 mm, d2 = 12 mm
RA-HC-25-10-10	100048796	Aluminum helix coupling Ø 25 mm; d1 = 10 mm, d2 = 10 mm

RA-HC-25-10-12

100048797

Aluminum helix coupling Ø 25 mm; d1 = 10 mm, d2 = 12 mm



Wiring accessories

Dimension drawing	Type	ID	
	RKC5701-5M	6931034	Bus cable for CAN (DeviceNet, - CANopen), M12 female connector, straight, cable length: 5 m, jacket material: PUR, anthracite; cULus approval