


TTM-100-LIUPN-H1140/P0002

Temperature Detection – With Current Output and PNP/NPN Transistor Switching Output





Technical data

Type	TTM-100-LIUPN-H1140/P0002
ID	100027261
Special version	P0002 Corresponds to: Product 9910632 with customer-specific default settings: Temperature range 0...500 °C. Caution: Default settings will be lost if device is reset to factory settings!
Temperature range	
Measuring range	-50...350 °C -58...662 °F
Factory setting	0...150 °C 32...302 °F
Measuring element	For connection to probes of the TP product series
Response time	depending on connected temperature probe
Power supply	
Operating voltage U_B	8...32 VDC
Current consumption	≤ 20 mA
Short-circuit/reverse polarity protection	yes / yes
Insulation class	III
Outputs	
Output 1	Switching output or IO-Link mode
Output 2	Analog output

Features

- Miniature design
- Customer-specific setting: 0...500 °C
- Parameterizable via IO-Link
- Analog output 4...20 mA (2-wire)
- Switching output
- For connection to external temperature probes

Wiring diagram

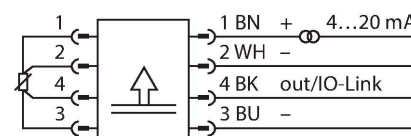

Functional principle

TP temperature probes (PT100 4-wire) can be plugged directly or via cable to the M12 connection at the TTM-100 temperature transmitter.

The measured temperature is transformed into an analog output signal (2-wire 4...20mA) and a switching signal. IO-Link is available for communication and programming.

Technical data

Switching output	
Communication protocol	IO-Link
Output function	NO/NC programmable, PNP/NPN
Switching point accuracy	± 0.3 K
Rated operational current	0.15 A
Release position	-210...+640 °C
Switching point	-200...+650 °C
Switching cycles	≥ 100 mil.
Analog output	
Current output	4...20 mA
Load	≤ [(V _{supply} - 10 V)/21 mA] kΩ
Accuracy (Lin. + Hys. + Rep.)	± 0.3 K
Remark	0.1 % of full scale applies to temperatures > +300 °C
Repeatability	0.1 K
IO-Link	
IO-Link specification	V 1.1
Transmission physics	corresponds to 3-wire physics (PHY2)
Transmission rate	COM 2 / 38.4 kbps
Process data width	16 bit
Measured value information	15 bit
Switching point information	1 bit
Frame type	2.2
Programming	FDT / DTM
Genauigkeit	± 0.2 K
Included in the SIDI GSDML	Yes
Mechanical data	
Housing material	Stainless-steel/Plastic, 1.4404 (AISI 316L)
Process connection	M12 × 1
Electrical connection	Connector, M12 × 1
Protection class	IP67
Environmental conditions	
Ambient temperature	-40...+80 °C
Storage temperature	-40...+80 °C
Tests/approvals	
Reference conditions acc. to IEC 61298-1	
Temperature	15...+25 °C

Technical data

Atmospheric pressure	860...1060 hPa abs.
Humidity	45...75 % rel.
Auxiliary power	24 VDC
Temperature behaviour	
Temperature coefficient range TK_s	± 0.1 % of full scale/10 K
Temperature coefficient zero point TK_0	± 0.1 % of full scale/10 K
MTTF	541 years acc. to SN 29500 (Ed. 99) 40 °C

Technical data

Type	TTM-100-LIUPN-H1140/P0002
ID	100027261
Special version	P0002 Corresponds to:Product 9910632 with customer-specific default settings: Temperature range 0...500 °C. Caution: Default settings will be lost if device is reset to factory settings!
Temperature range	
Measuring range	-50...350 °C
	-58...662 °F
Factory setting	0...150 °C
	32...302 °F
Note	Max. temperature of electronics: 80 °C/176 °F
Measuring element	For connection to probes of the TP product series
Response time	depending on connected temperature probe
Power supply	
Operating voltage U_s	8...32 VDC
	18...32 VDC
Current consumption	≤ 20 mA
Voltage drop at I_s	≤ 2 V
Short-circuit/reverse polarity protection	yes / yes
Protection class	IP67
Insulation class	III
Outputs	
Output 1	Switching output or IO-Link mode
Output 2	Analog output
Switching output	
Communication protocol	IO-Link

Technical data

Output function	NO/NC programmable, PNP/NPN
Note	Connection to PIN 1+3+4. Please use a 3-wire cable for operation on a Turck TBEN IO-Link master.
Switching point accuracy	$\pm 0.3 \text{ K}$
Rated operational current	0.15 A
Switching cycles	$\geq 100 \text{ mil.}$
Release position	-210...+640 °C
Switching point	-200...+650 °C
Analog output	
Current output	4...20 mA
Note	Connection to PIN 1+2
Load	$\leq [(V_{\text{supply}} - 10 \text{ V})/21 \text{ mA}] \text{ k}\Omega$
Accuracy (Lin. + Hys. + Rep.)	$\pm 0.3 \text{ K}$
Remark	0.1 % of full scale applies to temperatures $> +300 \text{ °C}$
Repeatability	0.1 K
IO-Link	
IO-Link specification	V 1.1
Programming	FDT / DTM
Transmission physics	corresponds to 3-wire physics (PHY2)
Transmission rate	COM 2 / 38.4 kbps
Process data width	16 bit
Measured value information	15 bit
Switchpoint information	1 bit
Frame type	2.2
Genauigkeit	$\pm 0.2 \text{ K}$
Included in the SIDI GSDML	Yes
Temperature behaviour	
Temperature coefficient zero point TK_0	$\pm 0.1 \text{ % of full scale/10 K}$
Temperature coefficient range TK_s	$\pm 0.1 \text{ % of full scale/10 K}$
Environmental conditions	
Ambient temperature	-40...+80 °C
Storage temperature	-40...+80 °C
Mechanical data	
Housing material	Stainless-steel/Plastic, 1.4404 (AISI 316L)
Process connection	M12 × 1
Electrical connection	Connector, M12 × 1

Technical data

Reference conditions acc. to IEC 61298-1	
Temperature	15...+25 °C
Atmospheric pressure	860...1060 hPa abs.
Humidity	45...75 % rel.
Auxiliary power	24 VDC
Tests/approvals	
MTTF	541 years acc. to SN 29500 (Ed. 99) 40 °C