


NCT3-M08-IOL-V1131

Capacitive Sensor

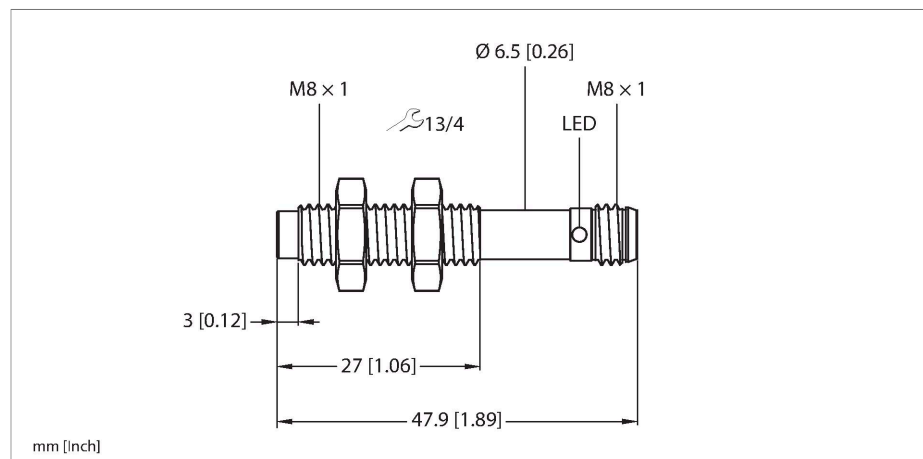


Technical data

Type	NCT3-M08-IOL-V1131
ID	100027491
Hysteresis	10...20 %
Ambient temperature	-25...+70 °C
Medium temperature	-25...+70 °C
Electrical data	
Operating voltage U_s	18...30 VDC
	In IO-Link mode
DC rated operating current I_s	≤ 100 mA
Switching frequency	0.2 kHz
Isolation test voltage	0.5 kV
Communication protocol	IO-Link
SIO mode-compatible	Yes
Number of digital outputs	1
Output function	3-pin, NO/NC programmable, PNP/NPN
Voltage drop at I_s	≤ 2 V
Insulation class	III
Tests/approvals	
IO-Link	
IO-Link specification	V 1.1
Programming	FDT/DTM
Transmission physics	corresponds to 3-wire physics (PHY2)
Transmission rate	COM 2/38.4 kbps

Features

- Detection of metallic and non-metallic objects
- Detection of liquids, powders and solid materials
- All functions can be parameterized via IO-Link
- Three different types of object teaching (one value, two value, dynamic) possible
- Available counting function whose content can be called up via IO-Link
- Switching status indicated by four LEDs arranged all around the device
- Male connector, M8 × 1, 3-pin
- Robust, compact housing made of nickel-plated brass
- M8 threaded design, non-flush, switching distance = 3 mm

Wiring diagram


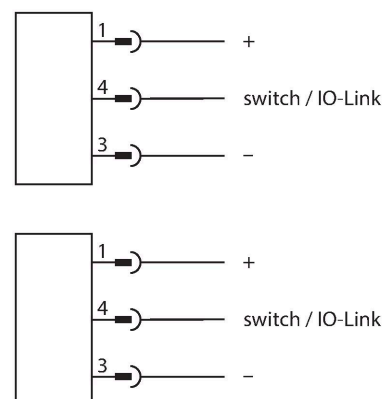


Technical data

Process data width	16 bit
Measured value information	12 bit
Frame type	2.2
Included in the SIDI GSDML	Yes
Mechanical data	
Design	Threaded barrel, M8 x 1
Dimensions	47.9 mm
Housing material	Metal, Nickel-Plated Brass
Active area material	yellow
Electrical connection	Connector, M8 x 1
	At 10...55 Hz/0.5 mm
Protection class	IP67
MTTF	1080 years acc. to SN 29500 (Ed. 99) 40 °C
Switching state	LED, 4 x yellow

Mounting instructions

Product features

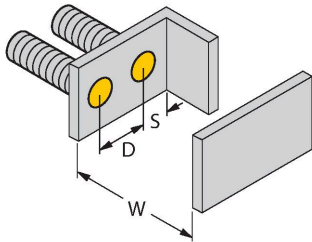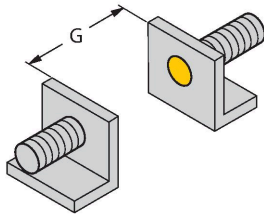

Distance D	16 mm
Distance W	8 mm
Distance S	12 mm
Distance G	16 mm
Diameter active area B	Ø 8 mm

The given minimum distances have been checked against the standard switching distance.
Should the sensitivity of the sensors be changed, these data sheet specifications no longer apply.