



Technische Daten

Conductor material	TC (tinned copper)
Conductor insulation material	PVC
Conductor size	22 AWG [Similar to 0.34 mm²]
Conductor colors	BN, BU, BK
Electrical properties at +20 °C	
Rated voltage	250 V _{AC} /300 V _{DC}
Current	4 A
Mechanical and chemical properties	
Ambient temperature range (static)	-40...+105 °C
Approvals	UL 2238 CSA C22.2 No. 182.3 CE UKCA RoHS
Note	
- We reserve the right to make technical alterations without prior notice.	


Mounting hole - Through

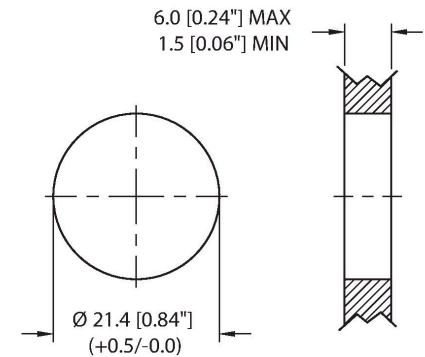

Mounting hole - Threaded

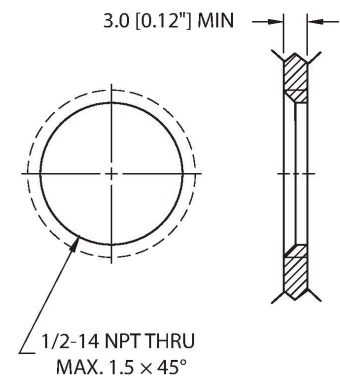

Front panel mounting

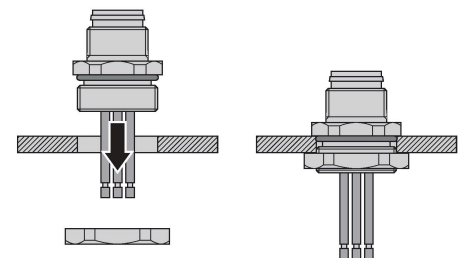


Montagezubehör

DECAL,9-CLRS,RECEPT+BOXES,EURO(QTY1)

100008955




1 decal sticker containing 9 different color sets of 11 decals to color code a sensor, junction block port, cable end, or receptacle. 5ct 4x9mm rectangles, 4ct 8x19mm rectangles, 1ct 27mm ID ring, 1ct 20mm ID ring.



Montagezubehör

LOCKNUT-1/2NPT-BRASS-(10/BAG)

100024931



Locknut, 1/2NPT, Brass, Nickel-plated, 10 per bag