



FKFD54PL-0.4/M16

M12 Power Receptacle – Rear Mount

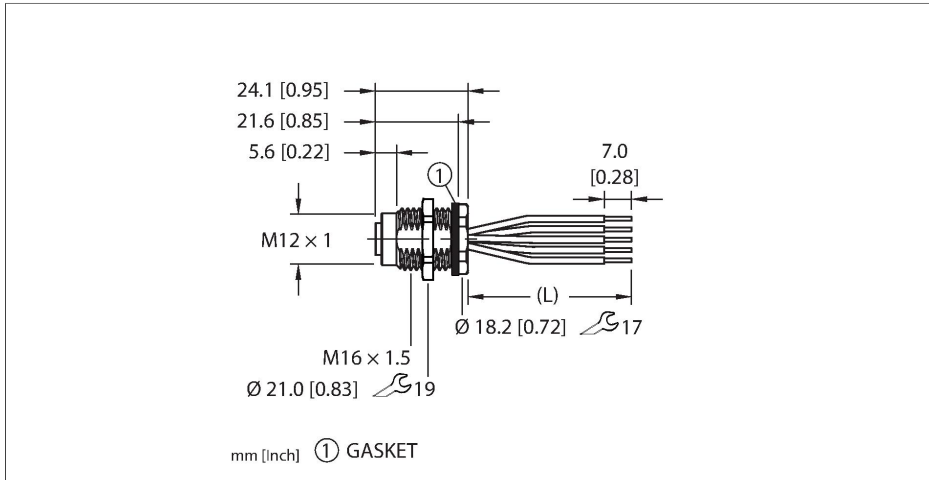

Technische Daten

Type	FKFD54PL-0.4/M16
ID	100034604
Connector A	Female, M12 × 1, L-code
Design specification	Acc. to IEC 61076-2-111
Number of contacts	4+FE
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, PA, Gray
Connector seal	O-ring, Rubber, NBR
Housing material/finish	Brass, CuZn, Nickel-plated
Tightening torque (range)	0.4 ... 1 Nm (note max. torque of mating connector!)
Mounting orientation	Rear mount
Panel seal	Gasket, Rubber, NBR
Mounting thread	M16 × 1.5
Locknut	Brass, CuZn, Nickel-plated
Receptacle mounting torque	2.5...7.3 Nm
Mechanical life	> 100 Mating cycles
Pollution degree	3
Protection class (When coupled)	IP67, IP68 NEMA: 1, 3, 4, 6P
Conductor data	
Length (L)	0.4 m, 0.4 m, (+50mm or 4% of length/-0.0, Whichever is greater)
Conductor material	TC (tinned copper)


Features




- M12 female connector, L-coded, 4-pin + FE
- Mounting thread: M16 x 1.5

Contact assignment

Connector A




Circuit Diagram




Technische Daten

Conductor insulation material	PVC
Conductor size	5 x 14 AWG [Similar to 2.50 mm ²]
Conductor colors	BN, WH, BU, BK, GY
Electrical properties at +20 °C	
Rated voltage	63 V
Current	16 A
Mechanical and chemical properties	
Ambient temperature range (static)	-40...+85 °C
Note	
- CAUTION: RISK OF ELECTRICAL SHOCK. DO NOT DISCONNECT UNDER LOAD.	
- We reserve the right to make technical alterations without prior notice.	

Mounting hole - Through

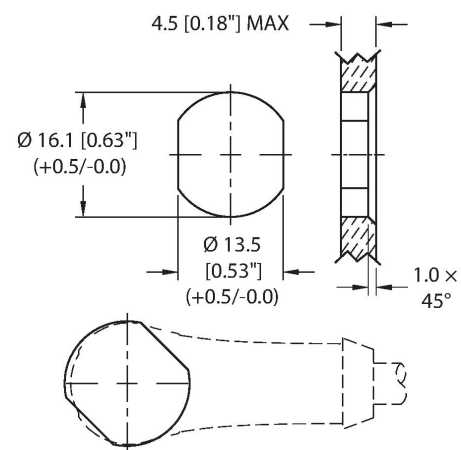

Mounting hole - Threaded

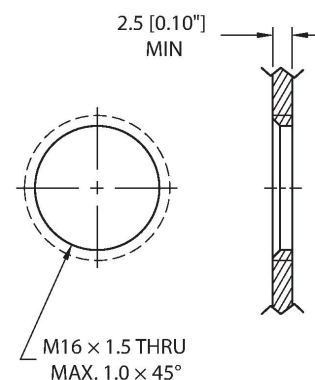


Rear-mounted




Montagezubehör

LOCKNUT-M16-BRASS-(10/BAG) A9579



Locknut, M16, Brass, Nickel-plated, 10 per bag

DECAL,9-CLRS,RECEPT+BOXES,EURO(QTY1) 100008955



1 decal sticker containing 9 different color sets of 11 decals to color code a sensor, junction block port, cable end, or receptacle. 5ct 4x9mm rectangles, 4ct 8x19mm rectangles, 1ct 27mm ID ring, 1ct 20mm ID ring.