


RU600D-M30M-LIU8X2-H1141

Ultrasonic Sensor – Diffuse Mode Sensor

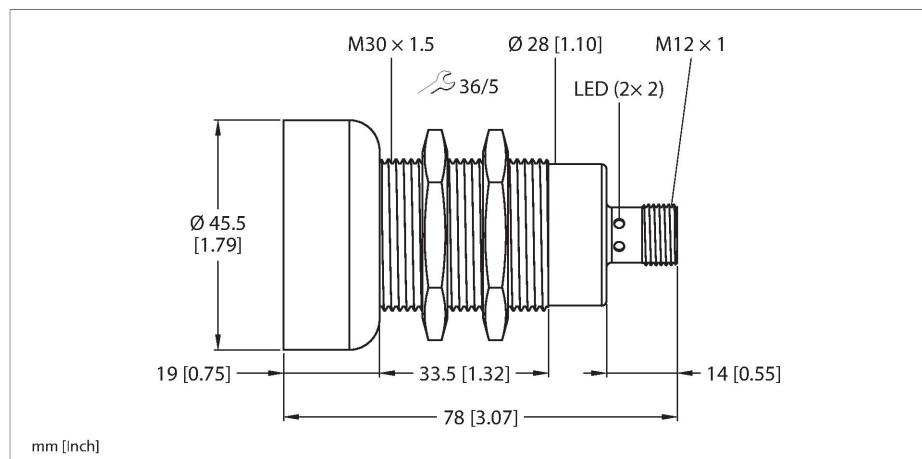


Technical data

Type	RU600D-M30M-LIU8X2-H1141
ID	100039015
Ultrasonic data	
Function	Proximity
Range	600...6000 mm
Resolution	1 mm
Minimum measuring range	500 mm
Minimum switching range	50 mm
Ultrasound frequency	80 kHz
Repeat accuracy	≤ 0.15 % of full scale
Temperature drift	± 1.5 % of full scale
Linearity error	≤ ± 0.5 %
Edge lengths of the nominal actuator	200 mm
Electrical data	
Operating voltage U_s	18...30 VDC
Residual ripple	10 % U_{ss}
DC rated operating current I_o	≤ 150 mA
No-load current	≤ 45 mA
Load resistance	≤ 1000 Ω
Residual current	≤ 0.1 mA
Readiness delay	≤ 300 ms
Communication protocol	IO-Link
Output function	NO/NC, PNP/NPN, analog output

Features

- Smooth sonic transducer face
- M30 cylindrical design, potted
- Connection via M12 × 1 male connector
- Measuring range adjustable via teach-in
- Temperature compensation
- Blind zone: 60 cm
- Range: 600 cm
- Resolution: 1 mm
- Adjustable switching hysteresis
- Aperture angle of sonic cone: ± 5 °
- 1 × switching output, PNP/NPN, IO-Link, teach-in, synchronization
- 1 × analog output, 4...20 mA/0...10 V/ switching output, PNP/NPN
- NO/NC programmable
- Transmission of process value and parametrization via IO-link
- Adjustable operation as a retroreflective sensor

Wiring diagram

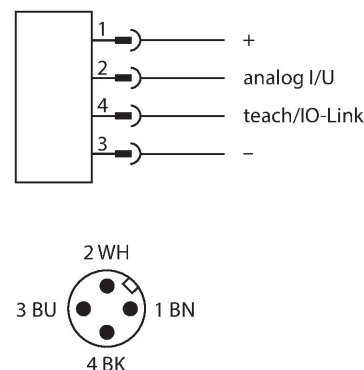

Technical data

Output 1	Switching output or IO-Link mode
Output 2	Analog output
Current output	4...20 mA
Load resistance current output	$\leq 0.4 \text{ k}\Omega$
Voltage output	0...10 V
Load resistance voltage output	$\geq 10 \text{ k}\Omega$
Switching frequency	$\leq 2 \text{ Hz}$
Hysteresis	$\leq 5 \text{ mm}$
Voltage drop at I_o	$\leq 2.5 \text{ V}$
Short-circuit protection	yes/Cyclic
Reverse polarity protection	yes
Wire breakage protection	yes
Setting option	Remote Teach IO-Link

IO-Link

IO-Link specification	V 1.1
IO-Link port type	Class A
Communication mode	COM 2 (38.4 kBaud)
Process data width	16 bit
Measured value information	15 bit
Switchpoint information	1 bit
Frame type	2.2
Minimum cycle time	2 ms
Function pin 4	IO-Link
Function Pin 2	Analog
Maximum cable length	20 m
Profile support	Smart Sensor Profile


Mechanical data

Design	Threaded barrel, M30
Radiation direction	straight
Dimensions	$\varnothing 45.5 \times 78 \text{ mm}$
Housing material	Metal, CuZn, Nickel Plated
Max. tightening torque of housing nut	75 Nm
Transducer material	Plastic, Epoxyd resin and PU foam
Electrical connection	Connector, M12 $\times$ 1, 4-wire
Ambient temperature	-25...+70 °C
Storage temperature	-40...+80 °C
Pressure resistance	0.5...5 bar

Functional principle

Ultrasonic sensors detect a multitude of objects contactlessly and wear free with ultrasonic waves. It does not matter whether the object is transparent or opaque, metallic or non-metallic, firm, liquid or powdery. Even environmental conditions such as spray, dust or rain hardly affect their function.

Sonic Cone

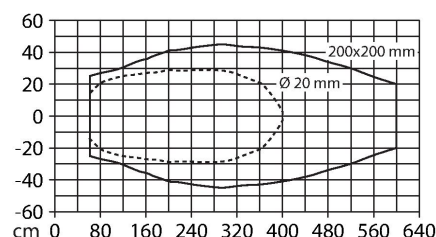


Technical data

Protection class	IP67
Power-on indication	LED, Green
Switching state	LED, Yellow
Object detected	LED, Yellow
Tests/approvals	
MTTF	574 years acc. to SN 29500 (Ed. 99) 40 °C
Declaration of conformity EN ISO/IEC	EN 60947-5-7
Approvals	CE cULus


Mounting instructions

Mounting instructions/Description

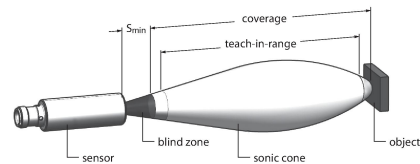

Accessories



MW30	6945005
------	---------



Mounting bracket for threaded barrel sensors; material: Stainless steel A2 1.4301 (AISI 304)

Accessories


Dimension drawing	Type	ID	
	USB-2-IOL-0002	6825482	IO-Link Master with integrated USB port

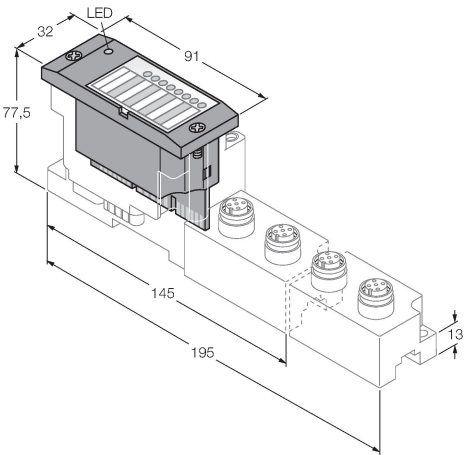

BL67-4IOL

6827386

4-channel IO-Link Master module for the modular BL67 I/O-system

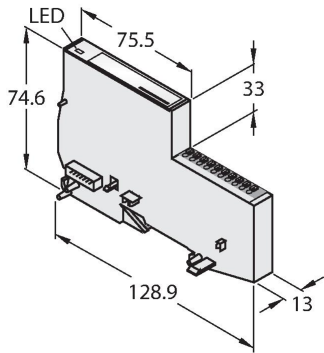

BL20-E-4IOL

6827385

IO-Link master module for the modular BL20 I/O system, 4-channel

Dimension drawing	Type	ID	
	TBEN-S2-4IOL	6814024	Compact multiprotocol I/O module, 4 IO-Link Master 1.1 Class A, 4 universal PNP digital channels 0.5 A

