


Unmanaged Ethernet Switch

8 × 1000 Mbit ports

TNIC-UX-8GE

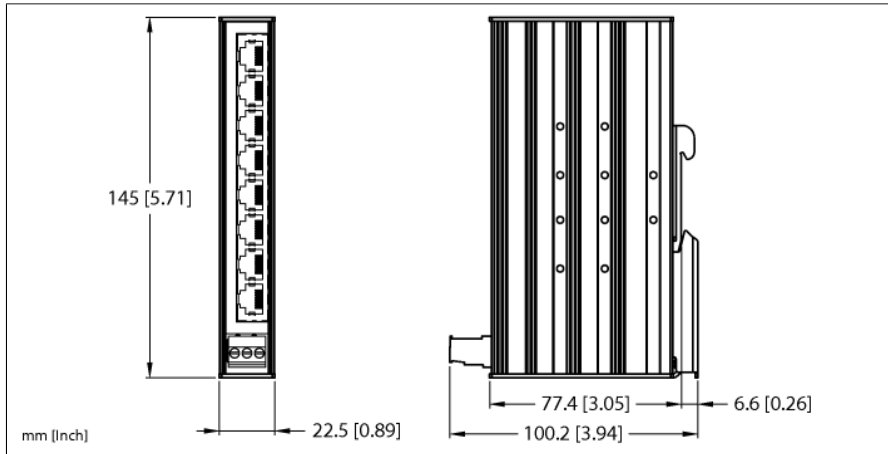

- 8 × RJ45, 1-Gbps Ethernet
- Aluminum housing
- Protection class IP30
- 3-pin, pluggable screw connection
- Power supply, Ethernet, housing galvanically isolated


Type	TNIC-UX-8GE
ID	100049179
Supply	
Supply voltage	24 VDC
Admissible range	9...36 VDC 12...28 VAC
Voltage supply connection	Pluggable screw terminal strip
Operating current	At 24 VDC: min. 60 mA; max. 145 At 24 VAC: min. 120 mA; max. 290 mA
Electrical isolation	Galvanic isolation of power supply, Ethernet, housing Voltage resistant up 2.25 kVDC

System data	
Transmission rate Ethernet	10/100/1000 Mbps
Connection technology Ethernet	8 × RJ45
Frame forwarding	store and forward

Switch interface	
10/100/1000-Mbit ports	8
802.3ab compliance	Yes
802.3q compliance	Yes
802.3u compliance	Yes
802.3x compliance	Yes
Auto-crossing (802.3)	Yes
Auto-negotiation (802.3)	Yes
Auto-polarity (802.3)	Yes
Flow control (802.3X)	Yes
Jumbo frames	Yes, up to 9216 bytes
Multicasts	Yes
Multiple queues per port	Yes, max. 8

Standard/Directive conformity	
Approvals and certificates	CE and UKCA UV resistant acc. to DIN EN ISO 4892-2A (2013)
UL Certificate	cULus LISTED 21 W2, encl. Type 1 IND.CONT.EQ.

General Information	
Dimensions (W x L x H)	22.5 x 77.4 x 145 mm
Ambient temperature	-40...+70 °C
Storage temperature	-40...+85 °C
Relative humidity	0...95 %, no condensation
Altitude	Max. 2000 m
Protection class	IP30
MTTF	153 years acc. to SN 29500 (Ed. 99) 20 °C
Housing material	Anodized aluminum, stainless steel
Halogen-free	yes
Mounting	35-mm DIN rail



Accessories

- 1 PWR (P): LED Power PWR (P): LED Power
- 2 L/A (F): LED 10/100 Mbps L/A: LED 10/100 Mbps
- 3 L/A (G): LED 1000 Mbps
- 4 XF1–XF8: Ethernet interface
- 5 XD: power supply
- 6 Bracket for DIN rail mounting

Power supply

—		
1	2	3
1 = 24 VDC	2 = 0 V	3 = FE