


Compact multiprotocol I/O module for IOT

8 IO-Link Master Channels

4 Universal Digital PNP Channels, 2 A, Channel Diagnostics

TBEN-L4-8IOL-IOT1

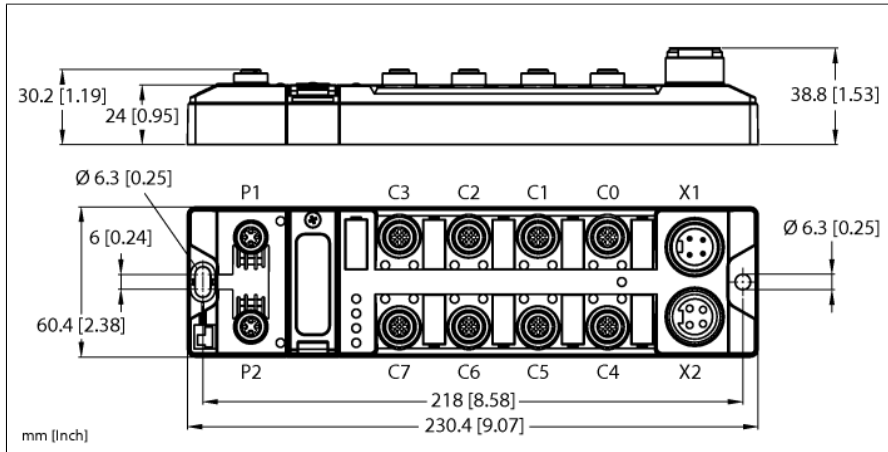

ID	100052909
Supply	
Supply voltage	24 VDC
Admissible range	18...30 VDC Total current max. 9 A per voltage group Total current V1 + V2 max. 11 A
Voltage supply connection	7/8", 4-pin
Operating current	V1: max. 180 mA, min. 120 mA V2: min. 40 mA, max. 90 mA
Sensor/actuator supply	Supply from V1 Short-circuit proof, max. 4 A per slot C0 and C4, max. 2 A per slot C1–C3, C5–C7
Sensor/actuator supply	Class B supply from V2 Short-circuit proof, max. 4 A per slot C4 and C5, max. 2 A per slot C6 and C7
Electrical isolation	galvanic isolation of the voltage groups V1 and V2, voltages up to 500 VAC
Fault exclusion	Yes, acc. to EN ISO 13849-2, appendix D.2
System data	
Fieldbus transmission rate	10/100 Mbps
Fieldbus connection technology	2 x M12, 4-pin, D-coded
Protocol detection	automatic
Web server	Default: 192.168.1.254
Service interface	Ethernet via P1 or P2
Ethernet/IP	
Addressing	acc. to EtherNet/IP specification
Quick Connect (QC)	< 150 ms
min. RPI	2 ms
Device Level Ring (DLR)	supported
Class 3 connections (TCP)	3
Class 1 connections (CIP)	10
Input Assembly Instance	101
Configuration Assembly Instance	106

- PROFINET device, EtherNet/IP device
- Send IO-Link data via MQTT and TAS Edge
- Integrated Ethernet switch
- Supports 10 Mbps/100 Mbps
- 2 x M12, 4-pin, D-coded, Ethernet fieldbus connection
- PROFINET S2 system redundancy
- Glass fiber reinforced housing
- Shock and vibration tested
- Fully potted module electronics
- Protection classes IP65, IP67, IP69K
- 7/8" male connector for power supply, 4-pin
- Galvanically isolated voltage groups
- M12 ports for IO-Link master, 5-pin
- IO-Link master port class A and port class B
- IO-Link Protocol 1.1

PROFINET	
Version	2.35
Addressing	DCP
Conformance class	B (RT)
MinCycleTime	1 ms
Fast Start-Up (FSU)	< 150 ms
Diagnostics	acc. to PROFINET alarm handling
Topology detection	supported
Automatic addressing	supported
Media Redundancy Protocol (MRP)	supported
System redundancy	S2
Netload class	3

MQTT	
MQTT-Version	V3.1.1
Protocol version	MQTT via WSS (WebSockets)
QoS	0 and 1
Security	Unsecure TLS 1.2 TLS 1.2
Payload	54199
Synchronization	SNTP
Name resolving	DNS for cloud connections
TLS-Version	TLS 1.2
Supported Cipher Suites	TLS_ECDHE_RSA_WITH_AES128_CBC_SHA256 TLS_ECDHE_RSA_WITH_AES128_GCM_SHA256 TLS_ECDHE_RSA_WITH_CHACHA20_POLY1305_SHA256 TLS_ECDHE_ECDSA_WITH_AES128_CBC_SHA256 TLS_ECDHE_ECDSA_WITH_AES128_GCM_SHA256 TLS_ECDHE_ECDSA_WITH_CHACHA20_POLY1305_SHA256
Device certificate	Programmable for HTTPS/MQTTS with MTLS
Root-of-Trust-Certificate	Programable for MQTTS


Digital inputs	
Number of channels	4 DXP + 8 SIO
Connectivity inputs	M12, 5-pin
Input type	PNP
Type of input diagnostics	Channel diagnostics
Switching threshold	EN 61131-2 Typ 3, PNP
Low-level signal voltage	< 5 V
High level signal voltage	> 11 V
Low level signal current	< 1.5 mA
High level signal current	> 2 mA
Input delay	0.05 ms
Electrical isolation	galvanically isolated to the bus, voltages up to 500 VAC

Digital outputs	
Number of channels	4 DXP
Connectivity outputs	M12, 5-pin
Output type	PNP
Type of output diagnostics	Channel diagnostics
Output voltage	24 VDC from potential group
Output current per channel	2 A, short-circuit proof
Electrical isolation	galvanic isolation to P1/P2 voltages up to 500 VDC

IO-Link	
Number of channels	8
IO-Link	Pin 4 in IOL mode
IO-Link specification	V 1.1
IO-Link port type	Class A and Class B
Frame type	supports all specified frame types
Supported devices	Max. 32 bytes in/32 bytes out per port
Transmission rate	4.8 kbps (COM 1) / 38.4 kbps (COM 2) / 230 kbps (COM 3)




Standard/Directive conformity	
Vibration test	Acc. to EN 60068-2-6 Acceleration up to 20 g
Shock test	acc. to EN 60068-2-27
Drop and topple	acc. to EN 60068-2-31/IEC 60068-2-32
Electromagnetic compatibility	Acc. to EN 61131-2
Approvals and certificates	CE and UKCA FCC statement, UV resistant acc. to DIN EN ISO 4892-2A (2013)
UL Certificate	cULus LISTED 21 W2, Encl.type 1 IND.CONT.EQ.

General Information	
Dimensions (W x L x H)	60.4 x 230.4 x 39 mm
Ambient temperature	-40...+70 °C
Storage temperature	-40...+85 °C
Altitude	Max. 5000 m
Protection class	IP65 IP67 IP69K
MTTF	161 years acc. to SN 29500 (Ed. 99) 20 °C
Housing material	PA6-GF30
Housing color	Black
Connector material	Nickel-plated brass
Window material	Lexan
Material screw	303 stainless steel
Material label	Polycarbonate
Halogen-free	yes
Mounting	2 mounting holes □ 6.3 mm





Accessories
Ethernet cable (example):
RSSD RSSD 441-2M
Ident no. U-02482

M12 x 1 Ethernet





Accessories
Pin 1: V_{AUX1} can be switched off via process data
Pin 4: IO-Link data or digital input (SIO mode)
C0...C3: IO-Link master class A
Pin 2: digital input or output (DXP)

M12 x 1 I/O slot




Accessories
Accessories:
Connection cable , 2-channel (example):
RK 4.4T-2-RS 4.4T
Ident no. U2445
Splitter, 1-channel (example):
YB2-FSM 4.5-2FKM 4.5
Ident no. U0875-78
Connection cable , 2-channel (example):
EKRT-ESRT-A4.400-GC2K-2
Ident no. UX19102

M12 x 1 I/O Port



Accessories
Power supply cable (example):
RSM RKM 40-2M
Ident no. U2280-0

7/8" Power Supply



Module Status LED

LED	Color	Status	Description
ETH1 / ETH2	Green	On	Ethernet Link (100 Mbps)
		Flashing	Ethernet communication (100 Mbps)
	yellow	On	Ethernet link (10 Mbps)
		Flashing	Ethernet communication (10 Mbps)
		Off	No Ethernet link
BUS	Green	On	Active connection to a master
		Flashing	Steady flashing: Ready Sequence of 3 flashes in 2 seconds: FLC/ARGE active
	Red	On	IP-address conflict or Restore Mode or Modbus timeout
		Flashing	Blink/Wink command active
	Green/Red	Alternating	Autonegotiation and/or waiting for DHCP/Boot-P addressing
		Off	Power off
ERR	Green	On	No diagnostics available
	Red	On	Diagnostics available
			Undervoltage diagnosis response is parameter dependent
PWR	LED response parameter (PWR) at V_2 undervoltage = "red"		
	Green	On	V_1 and V_2 power supply OK
	Red	On	V_2 power supply off or V_2 undervoltage
		Off	V_1 power supply off or V_1 undervoltage
	LED response parameter (PWR) at V_2 undervoltage = "green"		
	Green	On	V_1 and V_2 power supply OK
		Flashing	V_2 power supply off or V_2 undervoltage
		Off	V_1 power supply off or V_1 undervoltage

LED Status I/O

LED	Color	Status	Description
LED 0, 2, 4, 6, 8, 10, 12, 14 IO-Link Port 1-8 IO-Link Mode	Green	Flashing	IO-Link communication, process data valid
	Red	Flashing	IO-Link communication, process data invalid
		ON	IO-Link supply OK, no IO-Link Communication
LED 0, 2, 4, 6, 8, 10, 12, 14 IO-Link Port 1-8 SIO Mode	Green	ON	Digital Input signal is present
		OFF	No input signal
	Red	ON	Digital input or output active
		OFF	Output active with overload/short circuit
LED 1, 3, 5, 7 DXP	Green	ON	Digital input or output active
		Flashing	Overload supply V_{AUX1}
	Red	ON	Output active with overload/short circuit
		OFF	Input or output inactive
LED 9, 11, 13, 15 IO-Link Class B VAUX2	Green	ON	V_{AUX2} Active on Pin 2
		Flashing	Overload supply V_{AUX1}
	Red	ON	V_{AUX2} Active on Pin 2 with overload/short circuit
		OFF	V_{AUX2} Inactive on Pin 2

Process Data Mapping of the Single Protocols

For more details on the corresponding protocols see manual.

Accessories

Type code	Ident-No.		Dimension drawing
TB-SG-L	100014865	Protective housing for TBEN-L and TBIL-M block I/O modules for use in ATEX Zone 2/22	