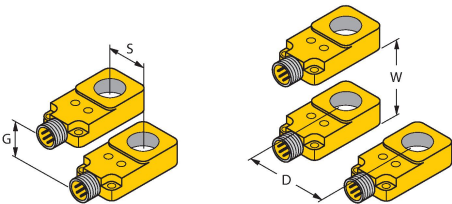



Technical data

Coil body	plastic, ABS
Environmental conditions	
Ambient temperature	-25...+70 °C
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP65
MTTF	2283 years acc. to SN 29500 (Ed. 99) 40 °C
Switching state	LED, Yellow

Mounting instructions

Mounting instructions/Description	
	Distance D
	150 mm
	Distance W
	150 mm
	Distance S
	150 mm
	Distance G
	150 mm

Accessories

ADAPTER CABLE RING 1.6M	14306
	Adapter cable enables separate mounting of ring probe and switching amplifier; coax cable: RG58 C/U 50 Ohm