


NI4-DSU35TC-2AP4X2/3GD

Inductive Sensor – For Rotary Actuators

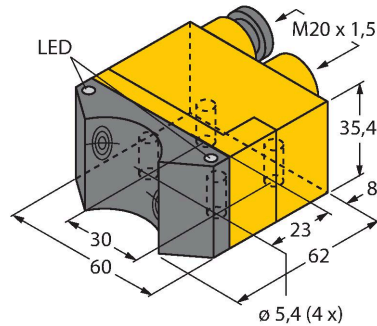


Technical data

Type	NI4-DSU35TC-2AP4X2/3GD
ID	1569911
General data	
Rated switching distance	4 mm
Mounting conditions	Non-flush
Correction factors	St37 = 1; Al = 0.3; stainless steel = 0.7; Ms = 0.4
Repeat accuracy	≤ 2 % of full scale
Temperature drift	≤ ±10 %
Hysteresis	3...15 %
Electrical data	
Operating voltage U_B	10...65 VDC
Ripple U_{ss}	≤ 10 % U_{Bmax}
DC rated operating current I_o	≤ 200 mA
No-load current	≤ 15 mA
Residual current	≤ 0.1 mA
Isolation test voltage	0.5 kV
Short-circuit protection	yes/Cyclic
Voltage drop at I_o	≤ 1.8 V
Wire break/reverse polarity protection	yes/Complete
Output function	4-wire, NO contact, PNP
Valve control	≤ 60 V / ≤ 20W
Switching frequency	0.05 kHz
Approval acc. to	ATEX test certificate TURCK Ex-03020H X

Features

- Rectangular, housing DSU35
- Plastic, PP-GF30-VO
- Two outputs for monitoring the position of rotary actuators
- Mounting on all standard actuators
- 2 × NO contact, PNP output
- DC 4-wire, 10...65 VDC
- Terminal chamber
- ATEX category II 3 G, Ex zone 2
- ATEX category II 3 D, Ex zone 22

Wiring diagram




Functional principle

Inductive sensors detect metal objects contactless and wear-free. Dual sensors are especially designed for position detection in rotary actuators. They combine the reliability of non-contact inductive sensors with the flexibility of a modular housing system.

Technical data


Device marking	EX II 3 G Ex ec IIC T5 Gc/II 3 D Ex tc IIIC T100 °C Dc
Warning	Use ATEX approved cable glands only.
Mechanical data	
Design	Dual sensor for valve monitoring, DSU35
Dimensions	62 x 60 x 35.4 mm
Housing material	Plastic, PP-GF30, Yellow
Active area material	Plastic, PP-GF30, black
Max. tightening torque of housing nut	3 Nm
Electrical connection	Terminal chamber
Clamping ability	≤ 2.5 mm ²
Environmental conditions	
Ambient temperature	-25...+70 °C
	For explosion hazardous areas see instruction leaflet
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP67
MTTF	2283 years acc. to SN 29500 (Ed. 99) 40 °C
Switching state	2 × LEDs, Yellow/red
Included in delivery	2 ATEX cable glands (black), 2 blanking plugs for cable glands, 1 M20x1 blanking plug

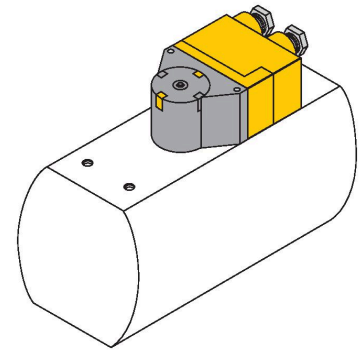

Accessories

BTS-DSU35-EB1


6900225



Actuation kit (puck) for dual sensors;
end position damped; hole pattern on
receptacle surface: 80 x 30 mm and
130 x 30 mm; connection shaft (shaft
extension) height: 20 mm (30 mm)/Ø:
max. 30 mm

BTS-DSU35-Z01


6900229



Mounting kit for dual sensors for
larger rotary actuators; Ø spacer plate
and snap ring: max. 65 mm; hole
pattern on receptacle surface: 30 x
80 mm (30 x 130 mm); connection
shaft (shaft extension) height: 20 mm/
Ø: max. 30 mm

BTS-DSU35-Z02


6900230



Mounting kit for dual sensors for
larger rotary actuators; Ø spacer plate
and snap ring: max. 65 mm; hole
pattern on receptacle surface: 30 x
80 mm (30 x 130 mm); connection
shaft (shaft extension) height: 20 mm
(30 mm)/Ø: max. 40 mm

BTS-DSU35-Z03


6900231



Mounting kit for dual sensors for
larger rotary actuators; Ø spacer plate
and snap ring: max. 110 mm; hole
pattern on receptacle surface: 30
x 130 mm; connection shaft (shaft
extension) height: 30 mm/Ø: max.
70 mm

BTS-DSU35-Z07


6900403



Mounting kit for dual sensors for larger rotary actuators; Ø spacer plate and snap ring: max. 110 mm; hole pattern on receptacle surface: 30 x 130 mm; connection shaft (shaft extension) height: 50 mm/Ø: max. 75 mm

BTS-DSU35-EU2


6900455



Actuation kit (puck) for dual sensors; end position undamped for clockwise and counter-clockwise drives; hole pattern on flange surface 80 x 30 mm and 130 x 30 mm; connection shaft (shaft stud) height 20 (30) mm / Ø max. 30 mm

BTS-DSU35-Z04


6900286



Mounting kit for dual sensors for larger rotary actuators; Ø spacer plate and snap ring: max. 65 mm; hole pattern on receptacle surface: 30 x 80 mm (30 x 130 mm); connection shaft (shaft extension) height: 30 mm/ Ø: max. 30 mm

BTS-DSU35-EBE3


6901070



Actuation kit (puck) for dual sensors; end position damped; "open" and "closed" switchpoint adjustable; hole pattern on receptacle surface: 80 x 30 mm and 130 x 30 mm; connection shaft (shaft extension) height: 20 mm/ Ø: max. 30 mm

BTS-DSU35-Z06


6900402



Mounting kit for dual sensors for larger rotary actuators; Ø spacer plate and snap ring: max. 65 mm; hole pattern on receptacle surface: 30 x 80 mm (30 x 130 mm); connection shaft (shaft extension) height: 30 mm/ Ø: max. 40 mm

BTS-DSU35-Z05

6900287



Mounting kit for dual sensors for larger rotary actuators; Ø spacer plate and snap ring: max. 65 mm; hole pattern on receptacle surface: 30 x 80 mm (30 x 130 mm); connection shaft (shaft extension) height: 30 mm/ Ø: max. 30 mm

Instructions for use

Intended use

This device fulfills the directive 2014/34/EU and is suited for use in explosion-hazardous areas acc. to EN60079-0:2018, EN60079-7:2015/A1:2018, EN60079-31:2014. In order to ensure correct operation to the intended purpose it is required to observe the national regulations and directives.

For use in explosion hazardous areas conform to classification

II 3 G and II 3 D (Group II, Category 3 G, electrical equipment for gaseous atmospheres and category 3 D, electrical equipment for dust atmospheres).

Marking (see device or technical data sheet)

Ⓔ II 3 G Ex ec IIC T5 Gc acc. to EN 60079-0:2018 and EN 60079-7:2015/A1:2018 and Ⓔ II 3 D Ex tc IIIC T100 °C Dc acc. to EN 60079-0:2018 and EN 60079-31:2014

Local admissible ambient temperature

-20...+70 °C

Installation/Commissioning

These devices may only be installed, connected and operated by trained and qualified staff. Qualified staff must have knowledge of protection classes, directives and regulations concerning electrical equipment designed for use in explosion hazardous areas. Please verify that the classification and the marking on the device comply with the actual application conditions.

Installation and mounting instructions

Avoid static charging of cables and plastic devices. Please only clean the device with a damp cloth. Do not install the device in a dust flow and avoid build-up of dust deposits on the device. If the devices and the cable could be subject to mechanical damage, they must be protected accordingly. They must also be shielded against strong electro-magnetic fields. The pin configuration and the electrical specifications can be taken from the device marking or the technical data sheet. In order to avoid contamination of the device, please remove possible blanking plugs of the cable glands or connectors only shortly before inserting the cable or opening the cable socket. Um die Schutzart aufrecht zu erhalten, müssen Gehäuseabdeckungen während des Betriebs stets vollständig verschlossen bleiben.

Special conditions for safe operation

Devices with terminal chamber (cable glands) have a weaker strain relief. Sufficient strain relief must be ensured or the cable must be stationary-mounted. Cable glands with the relevant ATEX approvals must be used for devices with a terminal compartment. Do not disconnect the plug-in connection or cable under voltage. Cables and cable intakes that are not used must be sealed with the delivered blank plug. The device must be protected against any kind of mechanical damage and degrading UV-radiation. When installed in a TURCK protective housing type SG-DSU35TC or SG-DSU35V this requirement is fulfilled. Load voltage and operating voltage of this equipment must be supplied from power supplies with safe isolation (IEC 30 364/UL508), to ensure that the rated voltage of the equipment (24 VDC +10% = 26.4 VDC) is never exceeded by more than 40%.

Service/Maintenance

Repairs are not possible. The approval expires if the device is repaired or modified by a person other than the manufacturer. The most important data from the approval are listed.