
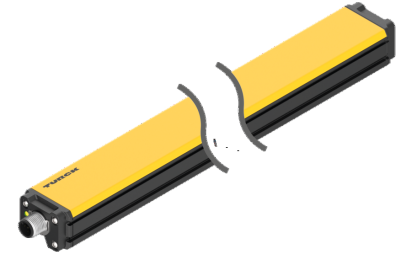


# LI300P2-Q25LM2-LIU5X3-H1151

## Inductive Linear Position Sensor

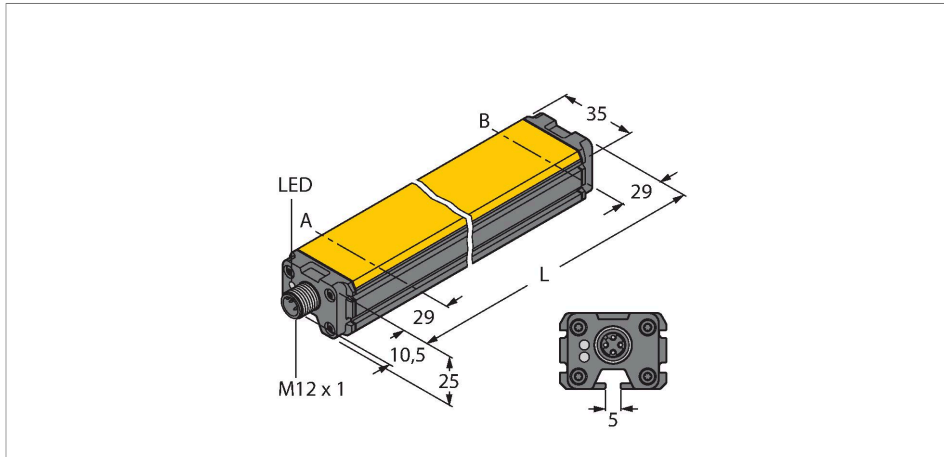



### Technical data

|                                        |                              |
|----------------------------------------|------------------------------|
| Type                                   | LI300P2-Q25LM2-LIU5X3-H1151  |
| ID                                     | 1590142                      |
| Measuring principle                    | Inductive                    |
| <b>General data</b>                    |                              |
| Measuring range                        | 300 mm                       |
| Resolution                             | 12 bit                       |
| Nominal distance                       | 1.5 mm                       |
| Blind zone a                           | 29 mm                        |
| Blind zone b                           | 29 mm                        |
| Repeat accuracy                        | $\leq 0.026\%$ of full scale |
| Linearity deviation                    | $\leq 0.07\%$ f.s.           |
| Temperature drift                      | $\leq \pm 0.003\%$ /K        |
| Hysteresis                             | not applied                  |
| <b>Electrical data</b>                 |                              |
| Operating voltage $U_B$                | 15...30 VDC                  |
| Ripple $U_{ss}$                        | $\leq 10\%$ $U_{Bmax}$       |
| Isolation test voltage                 | 0.5 kV                       |
| Short-circuit protection               | yes                          |
| Wire break/reverse polarity protection | yes/yes (voltage supply)     |
| Output function                        | 5-pin, Analog output         |
| Voltage output                         | 0...10 V                     |
| Current output                         | 4...20 mA                    |
| Load resistance voltage output         | $\geq 4.7\text{ k}\Omega$    |
| Load resistance current output         | $\leq 0.4\text{ k}\Omega$    |

### Features

- Rectangular, aluminium / plastic
- Versatile mounting possibilities
- Positioning element P2-Li-Q25L, mounting aid M2-Q25L included in delivery
- LED indicates measuring range
- Immune to electromagnetic interference
- Extremely short blind zones
- Resolution, 12-bit
- 4-wire, 15...30 VDC
- Analog output
- Programmable measuring range
- 0...10 V and 4...20 mA
- M12 × 1 male, 5-pin

### Wiring diagram

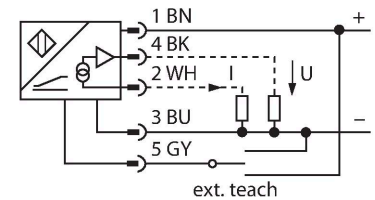


### Functional principle

The measuring principle of linear position sensors is based on RLC coupling between the positioning element and the sensor, whereby

## Technical data



|                                 |                                                   |
|---------------------------------|---------------------------------------------------|
| Sample rate                     | 500 Hz                                            |
| Current consumption             | < 50 mA                                           |
| <b>Mechanical data</b>          |                                                   |
| Design                          | Profile, Q25L                                     |
| Dimensions                      | 358 x 35 x 25 mm                                  |
| Housing material                | Aluminum/plastic, PA6-GF30, Anodized              |
| Active area material            | Plastic, PA6-GF30                                 |
| Electrical connection           | Connector, M12 × 1                                |
| <b>Environmental conditions</b> |                                                   |
| Ambient temperature             | -25...+70 °C                                      |
| Vibration resistance            | 55 Hz (1 mm)                                      |
| Shock resistance                | 30 g (11 ms)                                      |
| Protection class                | IP67                                              |
| MTTF                            | 138 years acc. to SN 29500 (Ed. 99) 40 °C         |
| Power-on indication             | LED, Green                                        |
| Measuring range display         | multifunction LED, green, yellow, yellow flashing |
| Included in delivery            | P2-Li-Q25L, M2-Q25L                               |
| UL certificate                  | E210608                                           |

an output signal is provided proportional to the position of the positioning element. The rugged sensors are wear and tear-free, thanks to the contactless operating principle. They convince through their excellent repeatability, resolution and linearity within a broad temperature range. The innovative technology ensures a high immunity to electromagnetic DC and AC fields.

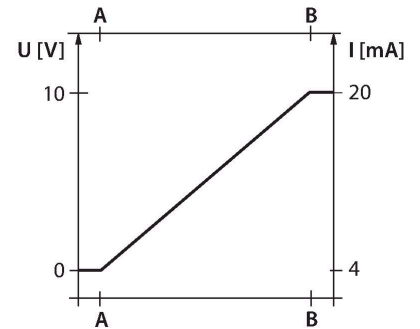

## Mounting instructions

### Mounting instructions/Description

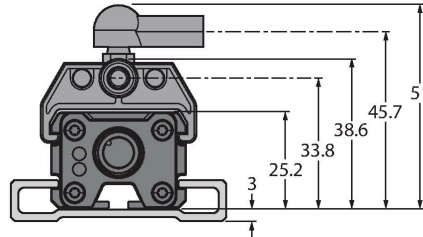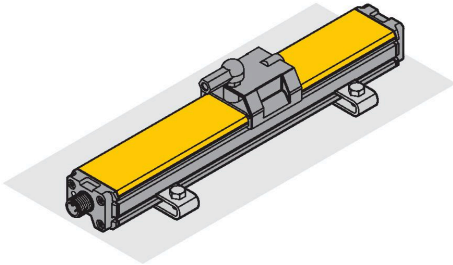

Extensive mounting accessories provide various options for installation. Due to the measuring principle, which is based on the functional principle of an RLC coupling, the linear position sensor is immune to magnetized metal splinters and other interferences.

Status display via LED

Green:

Sensor is supplied properly

LED indicates measuring range

Green:

Positioning element is within the measuring range

Yellow:

Positioning element is within the measuring range, low signal intensity (e.g. distance too large)

Yellow flashing:

Positioning element is outside the detection range

Off:

Positioning element is outside the programmed range (only with teachable versions)

Teaching


The start and end point of the measuring range are set by pressing the button on the teach adapter. Moreover there is the possibility of inverting the course of the output curve.

Bridge pin 5 and pin 1 for 10 s = factory setting

Bridge pin 5 and pin 3 for 10 s = factory setting inverted

Bridge pin 5 and pin 3 for 2 s = sets start value of measuring range

Bridge pin 5 and pin 1 for 2 s = sets end value of measuring range

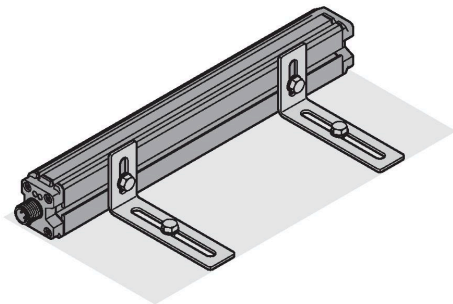


## Accessories

### P1-LI-Q25L

6901041

Guided positioning element for linear position sensors LI-Q25L, inserted in the groove of the sensor



### P2-LI-Q25L

6901042

Floating positioning element for linear position sensors LI-Q25L; the nominal distance to the sensor is 1.5 mm; pairing with the linear position sensor at a distance of up to 5 mm or misalignment tolerance of up to 4 mm.

