
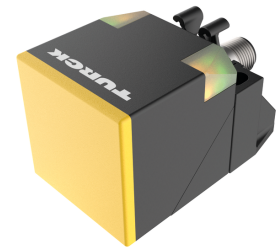


# NI50U-QV40-AP6X2-H1141

## Inductive Sensor – With Extended Switching Distance

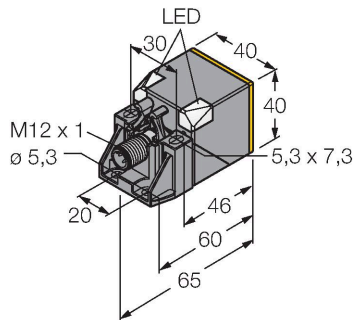



### Technical data

Type	NI50U-QV40-AP6X2-H1141
ID	1625853
<b>General data</b>	
Rated switching distance	50 mm
Mounting conditions	Non-flush, flush mountable
Secured operating distance	$\leq (0.81 \times S_n)$ mm
Repeat accuracy	$\leq 2 \%$ of full scale
Temperature drift	$\leq \pm 10 \%$
	$\leq \pm 20 \%, \leq -25 \text{ °C} \vee \geq +70 \text{ °C}$
Hysteresis	3...15 %
<b>Electrical data</b>	
Operating voltage $U_B$	10...30 VDC
Ripple $U_{ss}$	$\leq 10 \%$ $U_{Bmax}$
DC rated operating current $I_o$	$\leq 200$ mA
No-load current	$\leq 15$ mA
Residual current	$\leq 0.1$ mA
Isolation test voltage	0.5 kV
Short-circuit protection	yes/Cyclic
Voltage drop at $I_o$	$\leq 1.8$ V
Wire break/reverse polarity protection	yes/Complete
Output function	3-wire, NO contact, PNP
DC field stability	300 mT
AC field stability	300 mT <sub>ss</sub>
Insulation class	□

### Features

- Rectangular, height 40 mm
- Variable orientation of active face in 5 directions without tools
- Plastic, PBT-GF30-V0
- High luminance corner LEDs
- Optimum view on supply voltage and switching state from any position
- Factor 1 for all metals
- Increased switching distance
- Protection class IP68
- Resistant to magnetic fields
- Auto-compensation protects against pre-damping
- Partially embeddable
- DC 3-wire, 10...30 VDC
- NO contact, PNP output
- M12 x 1 male connector

### Wiring diagram



## Technical data



Switching frequency	0.25 kHz
<b>Mechanical data</b>	
Design	Rectangular, QV40
Dimensions	65 x 40 x 40 mm
	variable orientation of active face in 5 directions
Housing material	Plastic, PBT-GF30-V0, Black
Active area material	Plastic, PA6-GF30-X, yellow
Electrical connection	Connector, M12 × 1
<b>Environmental conditions</b>	
Ambient temperature	-30...+85 °C
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP68
MTTF	874 years acc. to SN 29500 (Ed. 99) 40 °C
Power-on indication	2 × LEDs, Green
Switching state	2 × LEDs, Yellow
Included in delivery	Fixing clamp for QV40

## Functional principle

Inductive sensors are designed for wear-free and contactless detection of metal objects. uprox+ sensors have significant advantages due to their patented multi-coil system. They excel thanks to their optimum switching distances, maximum flexibility and operational reliability as well as efficient standardization.

# Mounting instructions

## Mounting instructions/Description

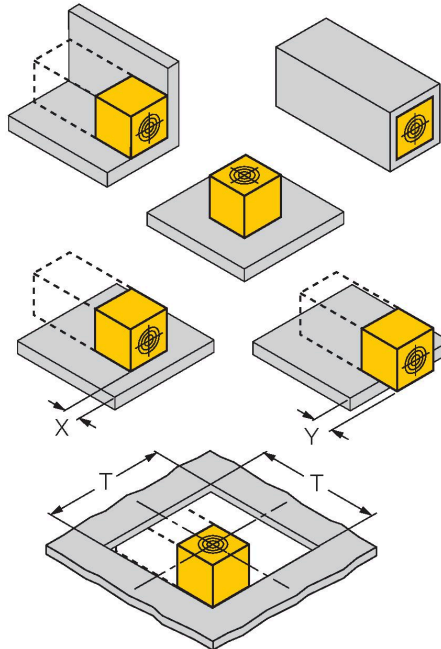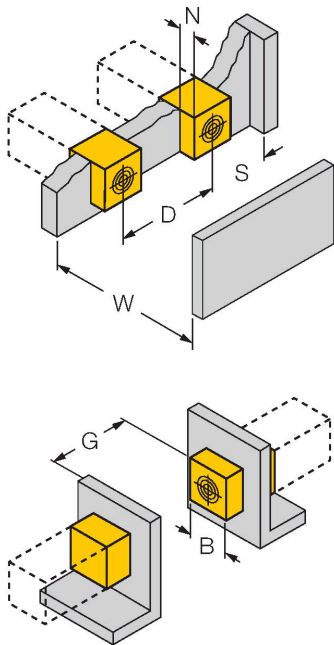

Distance D	240 mm
Distance W	105 mm
Distance S	60 mm
Distance G	300 mm
Distance N	30 mm
Width active area B	40 mm

### Flush mounting

- 1-side mounting:  $S_r = 35$  mm;  $D = 240$  mm
- 2-side mounting:  $S_r = 25$  mm;  $D = 240$  mm
- 3-side mounting:  $S_r = 20$  mm;  $D = 80$  mm
- 4-side mounting:  $S_r = 17$  mm;  $D = 60$  mm

Backside as well as recessed mounting with reduced switching distance

### Recessed mounting in metal:

- $x = 10$  mm:  $S_r = 20$  mm
- $x = 20$  mm:  $S_r = 20$  mm
- $x = 30$  mm:  $S_r = 20$  mm
- $x = 40$  mm:  $S_r = 20$  mm

### Protruded mounting:

- $y = 10$  mm:  $S_r = 40$  mm
- $y = 20$  mm:  $S_r = 50$  mm
- $y = 30$  mm:  $S_r = 50$  mm
- $y = 40$  mm:  $S_r = 50$  mm

Mounting in aperture plate:  $T = 150$  mm:

Sensor with twisted turning angle

On metal  $S_r = 50$  mm

Metal-enclosed on one side  $S_r = 25$  mm


Metal-enclosed on two sides  $S_r = 15$  mm

Metal-enclosed on three sides  $S_r = 12$  mm

With a single action the active face can be positioned in 5 directions without tools.


A light squeeze of the bracket is enough to release the sensor from the fixing clamp. Afterwards, the active face can easily be twisted to change the position.

Once the final position is attained, the sensor is simply inserted in the fixing clamp until the clamp snaps in. Safe and easy mounting is thus guaranteed.

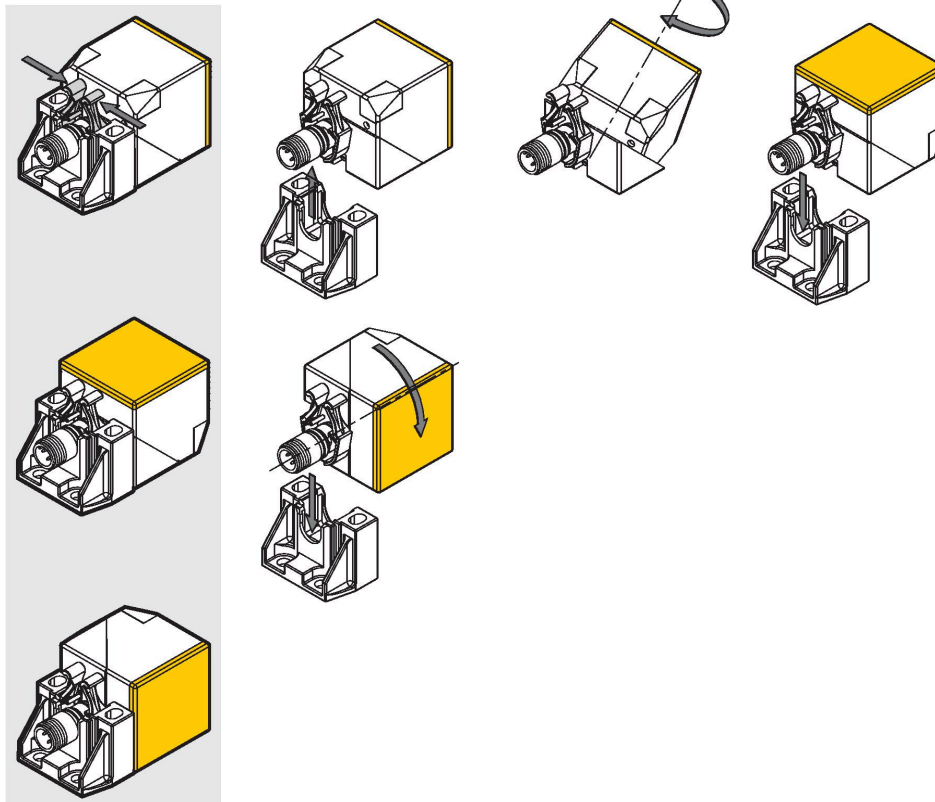

Accessories


BSS-CP406901318



Mounting clamp for rectangular housings 40 x 40 mm; material: Polypropylene

Wiring accessories

Dimension drawing	Type	ID	
	RKC4T-2/TEL	6625010	

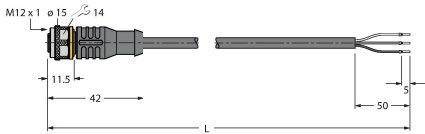

Connection cable, M12 female connector, straight, 3-pin, cable length: 2 m, jacket material: PVC, black; cULus approval